Catalog P133 | October 2013

POWER RESOURCE CENTER

THOUSANDS OF POWER PRODUCTS TO CHOOSE FROM

JAMECO®
ELECTRONICS

1-800-831-4242 | www.Jameco.com

FEATURED PRODUCTS

Ultra-Compact, High Efficiency Open-Frame Power Supplies

Open-Frame Power Supplies on pages 15-16 & 20

With some of the highest power densities you can find on the market, these high-quality supplies will remain efficient and reliable for a long time to come.

NEW MARKED IN PINK

*Web Code: OSP

N2Power

- Universal AC input: 90-264VAC @ 47-63Hz
- Active PFC circuitry meets or exceeds EN61000-3-2
- Short-circuit, over-voltage, over-power, over-temperature protection
- High power density
- Remote sense function
- Operating temperature range: -13°F to +122°F (-25°C to +50°C)
- 1.25"H is ideally suited for OEMs using industry standard 1U chassis

Part No.	Mfr. Part No.	Output Voltage @ Current	Power (W)	Efficiency	Size (W" x H" x D")	1	5
2187921	400002-71-3	+3.3V @ 10A; +5V @ 15A; +12V @ 5A; -12V @ 1A; +5Vsb @ 1A, ATX compliant	125	Up to 87%	3.0 x 1.25 x 5.0	$119.95	$109.95
2187930	400004-61-0	+12V @ 10.4A; +12V @ 1A	125	Up to 92%	3.0 x 1.25" x 5.0	99.95	89.95
2187956	400013-01-7	+12V @ 13.3A; +12V @ 1A	160	Up to 90%	3.0 x 1.25" x 5.0	114.95	104.95
2187972	400029-01-3	+12V @ 22.9A; +12V @ 1A; +5Vsb @ 1A w/ I²C/PMBus	275	Up to 91%	3.0 x 1.50" x 5.0	189.95	174.95
2187981	400081-01-4	+12V @ 23.3A; +12V @ 5A; +12V @ 1A; +5Vsb @ 1A	280	Up to 90%	3.0 x 1.43" x 5.3	189.95	174.95
2188019	400040-01-0	+12V @ 30A; +12V @ 1A; +5Vsb @ 1A	375	Up to 93%	3.3 x 1.50" x 5.0	249.95	224.95
2187948	400006-61-5	+24V @ 5.2A; +12V @ 1A	125	Up to 92%	3.0 x 1.25" x 5.0	79.95	74.95
2187964	400015-01-2	+24V @ 6.7A; +12V @ 1A	160	Up to 90%	3.0 x 1.25" x 5.0	114.95	104.95
2188027	400041-01-8	+24V @ 15A; +12V @ 1A; +5Vsb @ 1A	375	Up to 93%	3.3 x 1.50" x 5.0	229.95	209.95
2188035	400042-01-6	+48V @ 7.5A; +12V @ 1A; +5Vsb @ 1A	375	Up to 93%	3.3 x 1.50" x 5.0	209.95	194.95
2187999	400081-04-8	+54V @ 5.2A; +12V @ 5A; +12V @ 1A; +5Vsb @ 1A	280	Up to 90%	3.0 x 1.43" x 5.3	239.95	224.95
2188001	400091-01-3	+54V @ 6.1A; +12V @ 9A; +12V @ 1A; +5Vsb @ 1A	330	Over 91%	3.0 x 1.35" x 5.3	269.95	249.95

2187921

2187948

MDR-20 & MDR-60 Series DIN-Rail Power Supplies

DIN-Rail Power Supplies on page 22

Need a power supply but also want to keep your valuable workspace free? DIN-rail power supplies provide all the necessary power and stay out of the way with a convenient DIN rail.

*Web Code: RBY

MEAN WELL

- Universal AC input: 85-264VAC @ 47-63Hz, or 120-370VDC
- Can be installed on DIN rail TS35x7.5, or 15 (recommend P/N 248736 or 2172666)
- Short-circuit, overload, over-voltage protection
- No load power consumption < 0.75W
- 100% full load burn-in test
- Cooling by free air convection
- MDR-20: DC OK signal output
- MDR-60: DC OK relay contact

Part No.	Mfr. Part No.	Output Voltage @ Current	Power (W)	Size (W" x H" x D")	Wt. (lbs.)	1	5
1943300	MDR-20-5	5VDC @ 3.0A	15	0.89 x 3.5 x 3.9	0.42	$18.95	$16.95
1943449	MDR-60-5	5VDC @ 10.0A	50	1.6 x 3.5 x 3.9	0.73	28.95	25.95
1943334	MDR-20-12	12VDC @ 1.67A	20	0.89 x 3.5 x 3.9	0.42	18.95	16.95
1943457	MDR-60-12	12VDC @ 5.0A	60	1.6 x 3.5 x 3.9	0.73	28.95	25.95
1943342	MDR-20-15	15VDC @ 1.34A	20	0.89 x 3.5 x 3.9	0.42	18.95	16.95
1943385	MDR-20-24	24VDC @ 1.0A	24	0.89 x 3.5 x 3.9	0.42	18.95	16.95
1943465	MDR-60-24	24VDC @ 2.5A	60	1.6 x 3.5 x 3.9	0.73	28.95	25.95
1943473	MDR-60-48	48VDC @ 1.25A	60	1.6 x 3.5 x 3.9	0.73	28.95	25.95

MDR-20
Rail not included

MDR-60
Rail not included

CLG-100 & CLG-150 Series LED Power Supplies

LED Power Supplies on page 21

Fully capable LED power supplies in a compact size come no better than the CLG series. These can provide a serious amount of power from tight spaces, saving you valuable workspace real estate.

*Web Code: LPP

MEAN WELL

- Universal AC input / Full range (90-295VAC @ 47-63Hz, or 127-417VDC)
- Short-circuit, overload, over-voltage, over-temperature protection
- Output current adjustable
- Built-in constant current limiting circuit
- Built-in active PFC function, PF>0.9 for loads 75% or higher
- Meets 4kV surge immunity level (IEC61000-4-5)
- Size: 8.7"L x 2.7"W x 1.5"H
- Weight: 2.2 lbs.
- 3-year warranty

Part No.	Mfr. Part No.	Output Voltage @ Current	Enclosure Rating	Efficiency (%)	1	5
1585805	CLG-100-12	+12V @ 5.0A	IP67	83.0	$69.95	$62.95
1954877	CLG-150-12A*	+12V @ 11.0A	IP65	88.0	74.95	67.95
2108699	CLG-150-12	+12V @ 11.0A	IP67	88.0	74.95	67.95
1585872	CLG-100-24	+24V @ 4.0A	IP67	88.5	69.95	62.95
1954885	CLG-150-24A*	+24V @ 6.3A	IP65	90.0	74.95	67.95

*Output voltage and constant current level adjustable through internal potentiometer

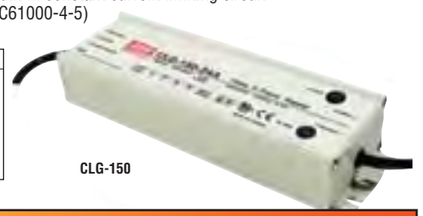

CLG-150

AC-to-DC Regulated Switching Wall Adapters

Wall Adapter Power Supplies on pages 2-6

Wall adapter power supplies are the most convenient because all you have to do is plug it in the wall. They come in many shapes and sizes, and are used to power virtually every small-medium scale electronic device there is.

JAMECO ReliaPro

PHIHONG

*Web Code: CDZ

Part No.	Manufacturer	Mfr. Part No.	Output Voltage@ Current	Input (VAC @ Hz)	DC Output Connector†	Size (H" x W" x D")	Pricing 1	5	25
2151101	ReliaPro	CNR2260	12VDC @ 0.5A	100-240 @ 50-60	2.1mm x 5.5mm	3.5 x 2.0 x 1.5	$7.95	$6.95	$6.25
2138951	Phihong	PSA11R-120*	12VDC @ 0.83A	90-264 @ 47-63	2.1mm x 5.5mm	3.4 x 2.1 x 1.4	9.95	8.95	7.95
2108656	Phihong	PSC12R-120-R*	12VDC @ 1A	90-264 @ 47-63	2.1mm x 5.5mm	2.8 x 1.8 x 1.3	14.95	13.95	12.95
2173108	ReliaPro	EA1030CU	15VDC @ 2A	100-240 @ 50-60	2.1mm x 5.5mm	3.9 x 1.8 x 1.2	15.95	14.95	13.49
1953671	ReliaPro	MPC-2400107	24VDC @ 1A	100-240 @ 50-60	2.5mm x 5.5mm	3.4 x 2.7 x 2.2	14.95	12.95	11.95

*Uses interchangeable AC clips (recommend P/N 229181, pg 4) † Female, center positive polarity

1953671

Power up with Jameco Electronics

All electronics designs need power and with this inaugural edition of the Jameco Power Catalog we're putting the power in your hands.

While Jameco prides itself on prices below its competitors, no one wants to save so much money on power that there is a risk of a low quality unit that could bring the whole system down. Yet spending too much on power doesn't always dramatically improve the overall design. Thus, this catalog features high quality power supplies at very attractive prices.

Power is Jameco's most popular category and in the pages ahead you'll see a wide range of brands, products and power options, but this catalog only just skims the surface of what's available online at Jameco.com. Every product category has a three-digit web code which, when entered into the Jameco.com search box, gives you access to more products, more specs plus the latest pricing and availability information.

Have large volume production needs? Give us a call at 800-831-4242 and we can work on everything from volume pricing to a bonded inventory program.

The Jameco Difference

Customer Service

We work hard to provide the best customer service in the industry. Our management team's first priority is listening and responding to customer feedback. You can email the management team directly at Management@Jameco.com with your feedback and expect a prompt and personal response.

Improved Shipping Options

Jameco has been hard at work expanding shipping options which for many have significantly reduced shipping costs. Whether you are looking for low pricing on air shipping or just want it as inexpensive as possible, Jameco's expanded options start at less than $4.

Selection

If you want great service, low prices and a reliable supplier of low-cost electronic components, turn to Jameco first. We carry house brands, factory over-runs and are franchised with over 200 name brands color-coded throughout the catalog. Look for our spec-by-spec, feature-by-feature comparison-shopping. Jameco has long standing relationships with manufacturers around the world, and we work hard to source a wide selection of value components.

3 LEVELS OF SAVINGS
NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Catalog Tools

Jump from catalog to website seamlessly with Jameco's exclusive Web Code. By simply entering the three character code into the Jameco.com search box you'll find more information, additional web-only products and the latest pricing and availability information. Don't search; simply step from catalog to the website without missing a beat.

Enter the web code in the product search box

*Power Cords — Enter Web Code UBF

PayPal

Jameco Now Accepts PayPal

CATALOG QUICK INDEX

Featured Products	Inside Front Cover,25,Back Cover
Brackets & Accessories	20
Computer Power Supplies	9
DIN-Rail Power Supplies	Inside Front Cover,22,23,Back Cover
Encapsulated Power Converters	23,24
Enclosed Power Supplies	16-20,25,Back Cover
High Efficiency Power Supplies	Inside Front Cover,20
High Voltage Power Supply	12
Interchangeable Power Adapters	4,6,9
LED Power Supplies	Inside Front Cover,21,25
Medical Power Supplies	6,16
Open-Frame Power Supplies	Inside Front Cover,15,16,20
Power Cables	9,10
Power Cords	6,11,13,14
Power Entry & Line Filters	13
Power Jacks, Plugs & Adapters	10
Power & Miscellaneous Transfomers	11,12
Table-Top Power Supplies	6-9,25,Back Cover
Wall Adapters	Inside Front Cover,2-6,9,24,25

Prices and discounts are subject to change without notice.

Jameco Electronics, ValuePro and ReliaPro are trademarks of James Electronics, LTD. Other product names and logos are used for identification purposes only and are trademarks of their respective companies. ©2013 James Electronics. All rights reserved.

FEATURED PRODUCTS

Ultra-Compact, High Efficiency Open-Frame Power Supplies

Open-Frame Power Supplies on pages 15-16 & 20

With some of the highest power densities you can find on the market, these high-quality supplies will remain efficient and reliable for a long time to come.

NEW MARKED IN PINK

*Web Code: OSP

N2Power

- Universal AC input: 90-264VAC @ 47-63Hz
- Active PFC circuitry meets or exceeds EN61000-3-2
- Short-circuit, over-voltage, over-power, over-temperature protection
- High power density
- Remote sense function
- Operating temperature range: -13°F to +122°F (-25°C to +50°C)
- 1.25"H is ideally suited for OEMs using industry standard 1U chassis

Part No.	Mfr. Part No.	Output Voltage @ Current	Power (W)	Efficiency	Size (W" x H" x D")	1	5
2187921	400002-71-3	+3.3V @ 10A; +5V @ 15A; +12V @ 5A; -12V @ 1A; +5Vsb @ 1A, ATX compliant	125	Up to 87%	3.0 x 1.25 x 5.0	$119.95	$109.95
2187930	400004-61-0	+12V @ 10.4A; +12V @ 1A	125	Up to 92%	3.0 x 1.25" x 5.0	99.95	89.95
2187956	400013-01-7	+12V @ 13.3A; +12V @ 1A	160	Up to 90%	3.0 x 1.25" x 5.0	114.95	104.95
2187972	400029-01-3	+12V @ 22.9A; +12V @ 1A; +5Vsb @ 1A w/ I²C/PMBus	275	Up to 91%	3.0 x 1.50" x 5.0	189.95	174.95
2187981	400081-01-4	+12V @ 23.3A; +12V @ 5A; +12V @ 1A; +5Vsb @ 1A	280	Up to 90%	3.0 x 1.43" x 5.3	189.95	174.95
2188019	400040-01-0	+12V @ 30A; +12V @ 1A; +5Vsb @ 1A	375	Up to 93%	3.3 x 1.50" x 5.0	249.95	224.95
2187948	400006-61-5	+24V @ 5.2A; +12V @ 1A	125	Up to 92%	3.0 x 1.25" x 5.0	79.95	74.95
2187964	400015-01-2	+24V @ 6.7A; +12V @ 1A	160	Up to 90%	3.0 x 1.25" x 5.0	114.95	104.95
2188027	400041-01-8	+24V @ 15A; +12V @ 1A; +5Vsb @ 1A	375	Up to 93%	3.3 x 1.50" x 5.0	229.95	209.95
2188035	400042-01-6	+48V @ 7.5A; +12V @ 1A; +5Vsb @ 1A	375	Up to 93%	3.3 x 1.50" x 5.0	209.95	194.95
2187999	400081-04-8	+54V @ 5.2A; +12V @ 5A; +12V @ 1A; +5Vsb @ 1A	280	Up to 90%	3.0 x 1.43" x 5.3	239.95	224.95
2188001	400091-01-3	+54V @ 6.1A; +12V @ 9A; +12V @ 1A; +5Vsb @ 1A	330	Over 91%	3.0 x 1.35" x 5.3	269.95	249.95

2187921

2187948

MDR-20 & MDR-60 Series DIN-Rail Power Supplies

DIN-Rail Power Supplies on page 22

Need a power supply but also want to keep your valuable workspace free? DIN-rail power supplies provide all the necessary power and stay out of the way with a convenient DIN rail.

*Web Code: RBY

MEAN WELL

- Universal AC input: 85-264VAC @ 47-63Hz, or 120-370VDC
- Can be installed on DIN rail TS35x7.5, or 15 (recommend P/N 248736 or 2172666)
- Short-circuit, overload, over-voltage protection
- No load power consumption < 0.75W
- 100% full load burn-in test
- Cooling by free air convection
- MDR-20: DC OK signal output
- MDR-60: DC OK relay contact

Part No.	Mfr. Part No.	Output Voltage @ Current	Power (W)	Size (W" x H" x D")	Wt. (lbs.)	1	5
1943300	MDR-20-5	5VDC @ 3.0A	15	0.89 x 3.5 x 3.9	0.42	$18.95	$16.95
1943449	MDR-60-5	5VDC @ 10.0A	50	1.6 x 3.5 x 3.9	0.73	28.95	25.95
1943334	MDR-20-12	12VDC @ 1.67A	20	0.89 x 3.5 x 3.9	0.42	18.95	16.95
1943457	MDR-60-12	12VDC @ 5.0A	60	1.6 x 3.5 x 3.9	0.73	28.95	25.95
1943342	MDR-20-15	15VDC @ 1.34A	20	0.89 x 3.5 x 3.9	0.42	18.95	16.95
1943385	MDR-20-24	24VDC @ 1.0A	24	0.89 x 3.5 x 3.9	0.42	18.95	16.95
1943465	MDR-60-24	24VDC @ 2.5A	60	1.6 x 3.5 x 3.9	0.73	28.95	25.95
1943473	MDR-60-48	48VDC @ 1.25A	60	1.6 x 3.5 x 3.9	0.73	28.95	25.95

MDR-20
Rail not included

MDR-60
Rail not included

CLG-100 & CLG-150 Series LED Power Supplies

LED Power Supplies on page 21

Fully capable LED power supplies in a compact size come no better than the CLG series. These can provide a serious amount of power from tight spaces, saving you valuable workspace real estate.

*Web Code: LPP

MEAN WELL

- Universal AC input / Full range (90-295VAC @ 47-63Hz, or 127-417VDC)
- Short-circuit, overload, over-voltage, over-temperature protection
- Output current adjustable
- Built-in constant current limiting circuit
- Built-in active PFC function, PF>0.9 for loads 75% or higher
- Meets 4kV surge immunity level (IEC61000-4-5)
- Size: 8.7"L x 2.7"W x 1.5"H
- Weight: 2.2 lbs.
- 3-year warranty

Part No.	Mfr. Part No.	Output Voltage @ Current	Enclosure Rating	Efficiency (%)	1	5
1585805	CLG-100-12	+12V @ 5.0A	IP67	83.0	$69.95	$62.95
1954877	CLG-150-12A*	+12V @ 11.0A	IP65	88.0	74.95	67.95
2108699	CLG-150-12	+12V @ 11.0A	IP67	88.0	74.95	67.95
1585872	CLG-100-24	+24V @ 4.0A	IP67	88.5	69.95	62.95
1954885	CLG-150-24A*	+24V @ 6.3A	IP65	90.0	74.95	67.95

*Output voltage and constant current level adjustable through internal potentiometer

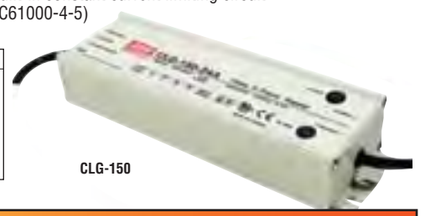

CLG-150

AC-to-DC Regulated Switching Wall Adapters

Wall Adapter Power Supplies on pages 2-6

Wall adapter power supplies are the most convenient because all you have to do is plug it in the wall. They come in many shapes and sizes, and are used to power virtually every small-medium scale electronic device there is.

JAMECO ReliaPro

PHIHONG

*Web Code: CDZ

Part No.	Manufacturer	Mfr. Part No.	Output Voltage@ Current	Input (VAC @ Hz)	DC Output Connector†	Size (H" x W" x D")	Pricing 1	5	25
2151101	ReliaPro	CNR2260	12VDC @ 0.5A	100-240 @ 50-60	2.1mm x 5.5mm	3.5 x 2.0 x 1.5	$7.95	$6.95	$6.25
2138951	Phihong	PSA11R-120*	12VDC @ 0.83A	90-264 @ 47-63	2.1mm x 5.5mm	3.4 x 2.1 x 1.4	9.95	8.95	7.95
2108656	Phihong	PSC12R-120-R*	12VDC @ 1A	90-264 @ 47-63	2.1mm x 5.5mm	2.8 x 1.8 x 1.3	14.95	13.95	12.95
2173108	ReliaPro	EA1030CU	15VDC @ 2A	100-240 @ 50-60	2.1mm x 5.5mm	3.9 x 1.8 x 1.2	15.95	14.95	13.49
1953671	ReliaPro	MPC-2400107	24VDC @ 1A	100-240 @ 50-60	2.5mm x 5.5mm	3.4 x 2.7 x 2.2	14.95	12.95	11.95

*Uses interchangeable AC clips (recommend P/N 229181, pg 4) † Female, center positive polarity

1953671

Power up with Jameco Electronics

All electronics designs need power and with this inaugural edition of the Jameco Power Catalog we're putting the power in your hands.

While Jameco prides itself on prices below its competitors, no one wants to save so much money on power that there is a risk of a low quality unit that could bring the whole system down. Yet spending too much on power doesn't always dramatically improve the overall design. Thus, this catalog features high quality power supplies at very attractive prices.

Power is Jameco's most popular category and in the pages ahead you'll see a wide range of brands, products and power options, but this catalog only just skims the surface of what's available online at Jameco.com. Every product category has a three-digit web code which, when entered into the Jameco.com search box, gives you access to more products, more specs plus the latest pricing and availability information.

Have large volume production needs? Give us a call at 800-831-4242 and we can work on everything from volume pricing to a bonded inventory program.

The Jameco Difference

Customer Service

We work hard to provide the best customer service in the industry. Our management team's first priority is listening and responding to customer feedback. You can email the management team directly at Management@Jameco.com with your feedback and expect a prompt and personal response.

Improved Shipping Options

Jameco has been hard at work expanding shipping options which for many have significantly reduced shipping costs. Whether you are looking for low pricing on air shipping or just want it as inexpensive as possible, Jameco's expanded options start at less than $4.

Selection

If you want great service, low prices and a reliable supplier of low-cost electronic components, turn to Jameco first. We carry house brands, factory over-runs and are franchised with over 200 name brands color-coded throughout the catalog. Look for our spec-by-spec, feature-by-feature comparison-shopping. Jameco has long standing relationships with manufacturers around the world, and we work hard to source a wide selection of value components.

3 LEVELS OF SAVINGS
NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Catalog Tools

Jump from catalog to website seamlessly with Jameco's exclusive Web Code. By simply entering the three character code into the Jameco.com search box you'll find more information, additional web-only products and the latest pricing and availability information. Don't search; simply step from catalog to the website without missing a beat.

Enter the web code in the product search box

*Power Cords — Enter Web Code UBF

PayPal

Jameco Now Accepts PayPal

CATALOG QUICK INDEX

Featured Products	Inside Front Cover,25,Back Cover
Brackets & Accessories	20
Computer Power Supplies	9
DIN-Rail Power Supplies	Inside Front Cover,22,23,Back Cover
Encapsulated Power Converters	23,24
Enclosed Power Supplies	16-20,25,Back Cover
High Efficiency Power Supplies	Inside Front Cover,20
High Voltage Power Supply	12
Interchangeable Power Adapters	4,6,9
LED Power Supplies	Inside Front Cover,21,25
Medical Power Supplies	6,16
Open-Frame Power Supplies	Inside Front Cover,15,16,20
Power Cables	9,10
Power Cords	6,11,13,14
Power Entry & Line Filters	13
Power Jacks, Plugs & Adapters	10
Power & Miscellaneous Transfomers	11,12
Table-Top Power Supplies	6-9,25,Back Cover
Wall Adapters	Inside Front Cover,2-6,9,24,25

Prices and discounts are subject to change without notice.

Jameco Electronics, ValuePro and ReliaPro are trademarks of James Electronics, LTD. Other product names and logos are used for identification purposes only and are trademarks of their respective companies. ©2013 James Electronics. All rights reserved.

AC-to-AC Wall Adapters

Input: 120VAC @ 60Hz

Female

Male

Female Right Angle

Screw Terminals

★Web Code: ABQ

2082530

206439

We specialize in Wall Adapters – Call for additional OEM PRICING. We are happy to change any listed AC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

Part No.	Manufacturer	Product No.	Output Rating Voltage (VAC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 250
2082521	ReliaPro	5-2634	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	White	6'	0.4	UL/CSA	$2.59	$2.25	$1.95	$1.49
2082530	ReliaPro	5-2633	5	400	1.7mm x 5.5mm right angle **F**	2.0 x 1.4 x 1.3	Black	6'	0.4	UL/CSA	3.59	3.25	2.95	2.49
249017	ReliaPro	ACU070150	7	1500	2.5mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	7.95	6.95	5.95	4.95
100061	ReliaPro♻	ACU090050	9	500	2.1mm x 5.5mm **F**	2.7 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
236814	ReliaPro	ACU090080	9	800	3.5mm **M**	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	8.95	7.95	6.95	5.95
1581281	ReliaPro	AA-091A	9	1000	2.1mm x 5.5mm **F**	2.2 x 2.1 x 1.6	Black	6'	0.6	UL/CSA	6.95	6.25	5.59	4.95
102234	ReliaPro♻	ACU090100	9	1000	2.1mm x 5.5mm **F**	3.2 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
1586154	OEM	AA091A	9	1000	2.5mm x 5.5mm **F**	2.2 x 2.1 x 1.6	Black	6'	0.6	UL/CSA	7.95	6.95	6.25	5.59
157041	ReliaPro♻	ACU090100E8942	9	1000	2.5mm x 5.5mm **F**	2.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	9.95	8.95	7.95	6.95
2167648	OEM	AA091A5	9	1500	2.1mm x 5.5mm **F**	2.4 x 2.4 x 1.9	Black	6'	0.8	UL/CSA	9.95	8.95	7.95	6.49
112336	ReliaPro♻	ACU090150	9	1500	2.5mm x 5.5mm **F**	2.5 x 2.2 x 2.0	Black	6'	0.9	UL/CUL	10.95	9.95	8.95	7.95
101258	ReliaPro♻	ACU120050	12	500	2.1mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2179614	ReliaPro♻	ACU120050R	12	500	2.5mm x 5.5mm **F**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	8.95	7.95	6.95	5.95
10081	ReliaPro♻	ACU120100J0920	12	1000	2.1mm x 5.5mm **F**	2.6 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
100167	ReliaPro♻	A411201000U	12	1000	2.5mm x 5.5mm **F**	3.2 x 2.4 x 2.0	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	7.29
10428	ReliaPro♻	ACU120100Z9121	12	1000	3.5mm **M**	2.6 x 2.4 x 2.0	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	6.29
2167576	ReliaPro	AM-121200A	12	1200	2.1mm x 5.5mm right angle **F**	3.2 x 2.1 x 1.9	Black	6'	0.9	UL/CSA	10.95	9.95	8.95	7.95
167151	ReliaPro♻	ADU120150	12	1500	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	11.95	10.95	9.95	8.95
307838	ReliaPro♻	ADU120160H4120	12	1600	2.5mm x 5.5mm **F**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	12.95	11.95	10.95	9.95
206404	MGElectronics	MGT1220	12	1670	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	9.95	8.95	7.95	7.29
2138978	ReliaPro	JOD-48U-12A	13.5	1000	1.3mm x 3.5mm **F**	2.8 x 2.2 x 1.9	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
2082564	ReliaPro	GPU1355000	13.5	5000	2.1mm x 5.5mm **F (Table-Top style)**	4.7 x 3.2 x 2.5	Black	6'	2.4	—	16.95	15.49	12.95	11.49
171408	ReliaPro	ACU140050	14	500	2.1mm x 5.5mm **F**	2.8 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	10.95	9.95	8.95	7.95
318684	ReliaPro♻	ACU140085	14	850	2.5mm x 5.5mm right angle **F**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	11.95	10.95	9.95	8.95
100108	ReliaPro♻	ADU160100	16	1000	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
2082142	Ault	308-2018	18	900	Screw terminals	1.9 x 2.2 x 2.0	Beige	—	0.7	UL	5.95	4.95	3.49	2.95
121216	ReliaPro♻	ADU180100	18	1000	2.1mm x 5.5mm **F**	3.1 x 2.7 x 1.9	Black	6'	1.1	UL/CUL	11.95	10.95	9.95	8.95
2179622	ReliaPro♻	AFU180200	18	2000	2.1mm x 5.5mm **F**	3.4 x 2.7 x 2.1	Black	6'	1.7	—	12.95	11.95	10.95	9.95
87581	ReliaPro	ADU240050	24	500	2.1mm x 5.5mm **F**	2.5 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
206439	MGElectronics	MGT2420	24	830	Screw terminals with green LED	3.2 x 2.2 x 1.9	White	—	0.9	UL	10.95	9.95	8.95	7.95
140599	ReliaPro	ADU240100D5531	24	1000	2.1mm x 5.5mm **F**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
10102	ReliaPro♻	ADU240100E0461	24	1000	3.5mm **M**	3.0 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	11.95	10.95	9.95	8.95
2100195	ReliaPro	GPU572401500WA00	24	1500	2.1mm x 5.5mm **F**	3.3 x 2.6 x 2.3	Black	6'	1.7	UL/CUL	14.95	13.49	11.95	10.95

AC-to-DC Regulated Switching Wall Adapters

★Web Code: CDZ

We specialize in Wall Adapters – Call for additional OEM PRICING. We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. A 100 pc. minimum order applies. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

Female Straight

Female Right Angle

2158549

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 5	Pricing 25
1950981	Philips	AY3192/17	5	2000	1.7mm x 4.0mm F **2**	100-240@50-60	3.1 x 1.4 x 1.3	Black	6'	0.3	UL/CUL	$8.95	$7.95	$6.95
1940740	Mean Well♻ CEC	GS12U05P1I	5	2000	2.1mm x 5.5mm F **2**	90-264@47-63	2.6 x 1.9 x 1.0	Black	4'	0.3	UL/CUL/CEC	11.25	9.95	8.95
2129641	ELPAC♻	WM1005-760†	5	2000	2.5mm x 5.5mm F **2**	100-120@50-60	2.8 x 1.6 x 1.1	Black	6'	0.3	UL/CUL	8.95	7.95	6.95
2138741	ReliaPro♻	CP0520	5	2000	2.5mm x 5.5mm F **1**	100-240@47-63	3.0 x 1.1 x 1.6	Black	6'	0.4	UL/CUL/TUV	9.95	8.95	7.95
2158549	ReliaPro♻ CEC	S15AA05025001*	5	2500	2.5mm x 5.5mm right angle F **2**	100-240@50-60	3.0 x 2.2 x 1.3	Black	6'	0.3	UL/CUL/CEC	14.95	13.49	11.95
1952863	Mean Well♻ CEC	GS18U05-P1J	5	3000	2.1mm x 5.5mm F **2**	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	13.49	12.49	11.25
2167664	Fairway	WN20U-050	5	3000	2.5mm x 5.5mm F **2**	100-240@50-60	2.9 x 2.0 x 1.6	Black	6'	0.4	UL/CUL	11.95	10.95	9.95
379623	Mean Well♻ CEC	GS25U05-P1J	5	4000	2.1mm x 5.5mm F **2**	100-240@50-60	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	14.25	12.95	11.49
2082011	Friwo	MPA3U	6	400	2.1mm x 5.5mm right angle F **2**	100-240@50-60	2.8 x 2.0 x 0.7	Black	6'	0.3	UL/CUL	3.95	3.49	2.95
2172931	ReliaPro♻ CEC	EA1006BU*	9	660	2.1mm x 5.5mm F **1**	100-240@50-60	2.1 x 1.4 x 1.0	Black	6'	0.1	UL/FCC/CEC	9.95	8.95	7.95
2158362	Fairway♻	TC10L-090*	9	1100	2.1mm x 5.5mm right angle F **2**	100-240@50-60	2.4 x 1.7 x 1.1	Black	6'	0.2	UL/CUL	9.95	8.95	7.95
1940766	Mean Well♻	GS12U09-P1I	9	1330	2.1mm x 5.5mm F **2**	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL	12.49	11.49	9.95
2179585	ReliaPro♻ CEC	ADS-18C-12†*	9	2000	2.1mm x 5.5mm right angle F **2**	100-240@50-60	2.8 x 2.0 x 1.3	Black	6'	0.4	UL/CUL/CEC	11.95	11.49	9.95
1952847	Mean Well♻ CEC	GS18U09-P1J	9	2000	2.1mm x 5.5mm F **2**	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	13.49	12.49	11.25
380140	Mean Well♻ CEC	GS25U09-P1J	9	2780	2.1mm x 5.5mm F **2**	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	14.25	12.95	11.49
2173124	ReliaPro♻ CEC	EA1030U†	9	3000	2.1mm x 5.5mm F **2**	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.5	UL/CUL/CEC	17.95	16.49	14.95
2121578	MG Electronics♻ CEC	ST-12500	12	500	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	8.95	7.95	7.49
2151101	ReliaPro♻ CEC	CNR2260	12	500	2.1mm x 5.5mm F **2**	100-240@50-60	3.6 x 2.0 x 1.3	Black	6'	0.3	UL/CUL/CEC	7.95	6.95	6.25

†RFI filter on cord *Slimline CEC

♻ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well products. For additional Mean Well products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Wall Adapters (Continued)

*Web Code: CDZ

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. A 100 pc. minimum order applies. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

Female Straight

Screw Terminals

NEW MARKED IN PINK

2179593

Part No.	Manufacturer	Product No.	Output Rating Volt. (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 5	Pricing 25
2129668	ELPAC	WM1012-760†	12	800	2.5mm x 5.5mm F 2	100-120@50-60	2.8 x 1.6 x 1.1	Black	6'	0.3	UL/CUL	$10.95	$9.95	$8.95
2121586	MG Electronics	ST-121A	12	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	11.95	10.95	9.95
1940774	Mean Well	GS12U12-P1I	12	1000	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	11.25	9.95	8.95
2126002	ITE Power	S018BU1200150	12	1500	2.5mm x 5.5mm F 2	100-240@50-60	2.9 x 1.7 x 1.2	Black	6'	0.3	UL/CUL/CEC	12.95	11.95	10.95
2179593	ReliaPro	ADS18C-121218†*	12	1500	2.1mm x 5.5mm right angle F 2	100-240@50-60	2.8 x 2.0 x 1.3	Black	6'	0.4	UL/CUL/CEC	12.95	11.95	10.95
1952855	Mean Well	GS18U12-P1J	12	1500	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.2	UL/CUL/CEC	13.49	12.49	11.25
2082134	MG Electronics	ST-122A	12	2000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.4	UL/CUL/CEC	14.95	13.49	11.95
380156	Mean Well	GS25U12-P1J	12	2080	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	4'	0.5	UL/CUL/CEC	14.25	12.95	11.49
2173116	ReliaPro	EA1036U†	12	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	19.95	17.95	16.49
2151208	ReliaPro	LFS123000D-A8B#	12	3000	2.1mm x 5.5mm F 2	100-240@50-60	3.8 x 2.4 x 1.6	Black	6'	0.5	UL/CUL	17.95	15.95	13.49
1952871	Mean Well	GS18U15-P1J	15	1200	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.4	Black	6'	0.4	UL/CUL/CEC	13.49	12.49	11.25
380173	Mean Well	GS25U15-P1J	15	1670	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CE	14.25	12.95	11.49
2173108	ReliaPro	EA1030CU†	15	2000	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	15.95	14.95	13.49
380191	Mean Well	GS25U18-P1J	18	1380	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 1.2 x 1.3	Black	6'	0.5	UL/CUL/CEC	14.25	12.95	11.49
2129650	ELPAC	WM1024-760†	24	400	2.5mm x 5.5mm F 2	100-120@50-60	2.8 x 1.6 x 1.1	Black	6'	0.3	UL/CUL	9.95	8.95	7.95
1940803	Mean Well	GS12U24-P1I	24	500	2.1mm x 5.5mm F 2	90-264@47-63	2.6 x 1.9 x 1.0	Black	6'	0.3	UL/CUL/CEC	11.25	9.95	8.95
1952898	Mean Well	GS18U24-P1J	24	750	2.1mm x 5.5mm F 2	90-264@47-63	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	13.49	12.49	11.25
2121594	MG Electronics	ST-241A	24	1000	Screw terminals	100-240@50-60	3.8 x 2.1 x 1.6	Black	—	0.3	UL/CUL/CEC	12.95	11.95	10.95
1953698	ReliaPro	MPC2400107	24	1000	2.1mm x 5.5mm F 2	100-240@50-60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CSA	14.95	12.95	11.95
1953671	ReliaPro	MPC-2400107	24	1000	2.5mm x 5.5mm F 2	120-240@50-60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CSA	14.95	12.95	11.95
380202	Mean Well	GS25U24-P1J	24	1040	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	14.25	12.95	11.49
2173095	ReliaPro	EA1030DU†	24	1250	2.1mm x 5.5mm F 2	100-240@50-60	3.9 x 1.7 x 1.2	Black	6'	0.6	UL/CUL/CEC	15.95	14.95	13.49
380220	Mean Well	GS25U28-P1J	28	890	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.6	UL/CUL/CEC	14.25	12.95	11.49
2179391	ReliaPro	PA1024-360HU	36	670	2.5mm x 5.5mm F 2	90-264@47-63	2.7 x 1.8 x 1.3	Black	6'	0.3	UL/CUL/CEC	16.49	14.95	13.49
380244	Mean Well	GS25U48-P1J	48	520	2.1mm x 5.5mm F 2	100-240@50-60	3.1 x 2.1 x 1.3	Black	6'	0.5	UL/CUL/CEC	16.95	15.49	13.95

†RFI filter on cord *Slimline # 3-wire/ground plug CEC

AC-to-DC "Slim Line" Regulated Switching Wall Adapters

Output connector: 2.1mm x 5.5mm F2 (center positive)

Compact in size and lightweight, they are the perfect power solution in all those applications where space is critical. And their high efficiency satisfies requirements for minimizing power losses. You no longer have to deal with traditional wall adapters that block unused outlets in wall plates and power strips/surge protectors.

- 2-wire AC input
- Output cord length: 6'
- Input voltage: 100 – 240VAC @ 47-63Hz
- Color: black
- One-year warranty

All are UL/CUL approved

*Web Code: CBQ

We'll Brand the Adapters With Your Company Name Call 1-800-831-4242 for Details

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 250
251565	ReliaPro	3.3	1500	2.5x1.1x1.7	0.2	$10.95	$9.95	$8.95	$7.49
251600	ReliaPro	3.3	2500	2.9x1.1x1.7	0.3	11.95	10.95	9.95	8.49
2173010	Phihong	5	400	1.9x1.4x0.9	0.1	9.95	8.95	7.95	6.95
252701	ReliaPro	5	500	2.9x1.1x1.7	0.3	10.95	9.95	8.95	7.95
2126125	OEM	5	800	1.9x1.6x0.9	0.1	7.95	6.95	6.25	5.95
1940660	Mean Well	5	1000	2.6x1.3x1.9	0.2	11.95	10.95	9.95	8.95
252720	ReliaPro	5	1000	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
252728	ReliaPro	5	1500	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
210894	ReliaPro	5	2000	2.9x1.4x2.2	0.2	12.95	11.95	10.95	9.95
2138724	Jentec	5	2500	2.4x1.9x1.1	0.4	9.95	8.95	7.95	6.95
252736	ReliaPro	5	2500	2.9x1.3x2.2	0.3	14.95	13.49	11.95	10.49
2082222	ReliaPro	5	3000	2.9x1.3x2.2	0.3	9.95	8.95	7.95	6.95
2135451	Open Peak	5	4000	3.3x2.0x1.5	0.3	12.95	11.95	10.95	9.95
2145078	ReliaPro	6	500	2.5x1.7x1.1	0.3	9.95	8.95	7.95	6.95
1940678	Mean Well	7.5	800	2.6x1.3x1.9	0.2	10.49	9.49	8.49	—
252753	ReliaPro	9	500	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
1940686	Mean Well	9	660	2.6x1.3x1.9	0.2	11.95	10.95	9.95	8.95
1950841	ReliaPro	9	1000	2.5x1.1x1.7	0.2	13.95	12.49	10.95	9.95
252779	ReliaPro	9	1200	2.9x1.3x2.2	0.3	13.95	12.49	10.95	9.95

Part No.	Manufacturer	Output Rating Volt (VDC)	Output Rating Curr. (mA)	Size (in.) (H x W x D)	Wt. (lbs.)	Pricing 1	Pricing 10	Pricing 50	Pricing 250
2099850	Ault	9	1300	2.4x1.8x1.3	0.3	$10.95	$9.95	$8.95	$7.95
252786	ReliaPro	9	1500	2.9x1.3x2.2	0.3	15.95	14.49	12.95	11.49
2173132	ReliaPro	9	2000	2.8x2.0x1.3	0.3	16.95	15.49	13.95	11.49
252795	ReliaPro	12	250	2.5x1.1x1.7	0.2	8.95	7.95	6.95	6.25
252808	ReliaPro	12	500	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
1940694	Mean Well	12	500	2.6x1.3x1.9	0.2	10.49	9.49	8.49	7.95
2150758	ReliaPro	12	500	2.5x1.7x1.1	0.2	9.95	8.95	7.95	6.95
252816	ReliaPro	12	600	2.5x1.1x1.7	0.2	11.95	10.95	9.95	8.95
2151005	DVE	12	1000	2.7x1.8x1.1	0.2	10.95	9.95	8.95	7.95
252824	ReliaPro	12	1000	2.9x1.3x2.2	0.3	12.95	11.49	9.95	8.95
252833	ReliaPro	12	1250	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
2167656	Sunny	12	1500	2.9x1.7x1.3	0.3	12.95	11.95	10.95	9.95
1950497	ReliaPro	12	2000	2.9x2.1x1.3	0.4	15.95	14.49	12.95	11.49
254757	ReliaPro	15	800	2.9x1.3x2.2	0.2	12.95	11.49	10.49	9.49
252904	ReliaPro	15	1000	2.9x1.3x2.2	0.3	13.95	12.95	11.95	10.95
252858	ReliaPro	24	250	2.5x1.1x1.7	0.2	10.95	9.95	8.95	7.95
1952919	ReliaPro	24	500	2.9x1.3x1.7	0.3	11.95	10.95	9.95	8.95
252866	ReliaPro	24	500	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95
2076341	ReliaPro	24	630	2.9x1.3x2.2	0.3	12.95	11.95	10.95	9.95

CEC

*For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Energy Star Worldwide Interchangeable AC-to-DC Regulated Switching Wall Adapters

Meets US and European Energy Star compliance. Approved for European high-efficiency power applications.

★Web Code: NBH

- Field changeable AC Plug Clips **(sold separately, see below)**
- Regulated output • Double insulated
- Input voltage: 90-264VAC @ 47-63Hz • Power-On LED
- Output connector: 2.1mm x 5.5mm female center positive; except where noted
- Load regulation: ±5% • Class B EMI • Color: black
- Applications: wireless communications, portable equipment, digital camera, peripherals and networking

Phihong & Mean Well AC Plug Clips (below)

Shown w/o AC Plug Clip
AC Plug Clips Not Included

2161570

Wall Adapters (AC Plug Clip required, not included)

Part No.	Manufacturer	Product No.	Output Volt. (VDC)	Current (A)	Power (W)	Ripple (mVp-p)	Line Regulation	Efficiency (%)	Dimensions (L" x W" x H")	Pricing 1	5	25
2161570	ReliaPro	SA050100R1340℞**	5	1.0	5	300	±5%	80	2.7 x 1.8 x 0.8	$10.95	$9.95	$8.95
2144809	Phihong	PSA08R-050℞†#	5	1.0	5	50	±1%	70	2.8 x 1.8 x 1.0	10.95	9.95	8.95
2139815	Phihong	PSAC05R-050(P)℞	5	1.0	5	50	±1%	60 - 75	2.8 x 1.8 x 1.2	11.95	10.95	9.95
2158240	Phihong	PSM11R-050℞##	5	2.0	10	100	±5%	70	2.8 x 1.7 x 1.2	10.95	9.95	8.95
2155401	Phihong	PSA15R-090P-R℞	9	1.66	15	90	±5%	75	2.8 x 2.0 x 1.3	13.95	11.49	10.95
2082311	Mean Well	GE18I09-P1J℞	9	2.0	18	100	±5%	75	3.2 x 1.7 x 1.6	14.95	12.95	11.75
2138951	Phihong	PSA11R-120	12	0.83	10	120	±1%	65	2.8 x 1.8 x 1.2	9.95	8.95	7.95
2167541	ReliaPro	HK-CP12-A12℞*	12	1.0	12	120	±5%	80	3.0 x 1.8 x 1.5	13.95	12.95	11.49
2108656	Phihong	PSC12R-120℞	12	1.0	12	240	±5%	78	2.8 x 1.8 x 1.2	14.95	13.95	12.95
2154986	ReliaPro	FW75550/12℞*	12	1.25	15	150	±5%	80	3.5 x 2.0 x 1.3	15.95	14.95	13.95
2179690	ReliaPro	WA-18H12℞†#	12	1.5	18	120	±2%	83	3.0 x 2.0 x 1.4	12.95	11.95	10.95
2100179	Phihong	PSAA20R-120℞	12	1.67	20	120	±5%	81	2.8 x 2.0 x 1.3	17.95	16.95	14.49
2173001	ReliaPro	S024EM1200200℞*	12	2.0	24	120	±2%	87	3.2 x 1.9 x 1.4	19.95	17.95	15.49
2082345	Mean Well	GE12I24-P1J℞	24	0.63	15	240	±3%	80	2.8 x 1.6 x 1.5	12.95	11.49	9.95

†Includes USA AC plug clip #2.5mm x 5.5mm female plug ##Mini USB plug *Kit includes US, UK, EU, AUS plugs **Raspberry Pi adapter

Phihong AC Plug Clips (sold separately, required for above adapters)

Part No.	Mfr. P/N	Description (see above for photos)	1	10	50	250
229155	RPA℞	USA AC plug only	$1.25	$1.19	$1.09	$.99
229163	RPE℞	European AC plug only	1.25	1.19	1.09	.99
229181	RPKIT℞	Kit includes US, EU, UK & AU clips (4)	4.49	4.25	3.95	3.59

Mean Well AC Plug Clips (sold separately, required for above adapters)

Part No.	Mfr. P/N	Description (see above for photos)	1	5	25
2082353	AC-Plug-US℞	USA AC plug only	$.75	$.65	$.59
2082361	AC-Plug-EU℞	European AC plug only	.95	.85	.75
2082396	AC-Plug-MIX℞	Kit includes US, EU, UK & AU clips (4)	3.65	3.25	2.95

AC-to-DC Regulated Linear Wall Adapters

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

1953639

Female Female Right Angle

★Web Code: WAZ

◆ Polarity 1 ⊕—●—⊖ (center negative)
Polarity 2 ⊖—●—⊕ (center positive)
Female(F) Male(M)

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC @ Hz	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	10	50	250
164101	ReliaPro	GPU410500500WD00	5	500	2.1mm x 5.5mm F **2**	120 @ 60	3.1 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	$10.95	$9.95	$8.95	$7.95
2081609	Condor	RWP480505	5	1000	2.1mm x 5.5mm F **2**	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	1.2	UL/CSA	7.95	6.95	5.95	4.95
168605	ReliaPro℞	DBU0501000	5	1000	2.5mm x 5.5mm F **2**	120 @ 60	3.3 x 2.2 x 1.9	Black	6'	1.2	UL/CUL	10.95	9.95	8.95	7.95
190512	ReliaPro℞	DBU60020-H3570	6	200	2.1mm x 5.5mm F **2**	120 @ 60	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	9.95	8.95	7.95	6.95
283573	ReliaPro	ADR-6V500MA-2.1	6	500	2.1mm x 5.5mm F **2**	120 @ 60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	10.95	9.95	8.95	7.95
1953701	ReliaPro	ADR-6V500MA-2.5	6	500	2.5mm x 5.5mm F **2**	120 @ 60	3.1 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
190529	ReliaPro℞	AD9123	9	250	2.5mm x 5.5mm right angle F **2**	120 @ 60	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CUL	10.95	9.95	8.95	7.95
1953639	ReliaPro℞	DCU09050	9	500	2.1mm x 5.5mm F **2**	120 @ 60	2.4 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
1953647	ReliaPro℞	SF41-0900500RU	9	500	2.5mm x 5.5mm F **2**	120 @ 60	3.0 x 2.0 x 1.6	Black	6'	0.9	UL/CUL	10.95	10.49	9.95	8.95
220898	ReliaPro℞	DCU120020	12	200	2.1mm x 5.5mm F **1**	120 @ 60	2.5 x 2.0 x 1.7	Black	6'	0.5	UL/CUL	8.95	7.95	6.95	6.25
162996	ReliaPro℞	DDU120050	12	500	2.1mm x 5.5mm F **2**	120 @ 60	3.2 x 2.2 x 1.9	Black	6'	0.9	UL/CUL	11.95	10.95	9.95	8.95
170245	ReliaPro	RDU120100	12	1000	2.1mm x 5.5mm F **2**	120 @ 60	3.2 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
1953663	ReliaPro℞	DCU1201000	12	1000	2.5mm x 5.5mm F **2**	120 @ 60	3.3 x 2.3 x 2.0	Black	6'	1.2	UL/CUL	14.95	13.49	11.95	10.95
174861	ReliaPro℞	DFU240050	24	500	2.1mm x 5.5mm F **2**	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95
174879	ReliaPro℞	DCU090025	24	500	2.5mm x 5.5mm F **2**	120 @ 60	3.4 x 2.7 x 2.2	Black	6'	1.3	UL/CUL	14.95	13.49	11.95	10.95

More AC-to-DC Wall Adapters listed on pages 2-3 & 5-6

BEST SELLING — REGULATED SWITCHING WALL ADAPTERS

P/N 1952863	5V @ 3A	$13.49 (pg 2)	P/N 1952871	15V @ 1.2A	$13.49 (pg 3)
P/N 1952847	9V @ 2A	13.49 (pg 2)	P/N 380191	18V @ 1.3A	14.25 (pg 3)
P/N 1952855	12V @ 1.5A	13.49 (pg 3)	P/N 1953698	24V @ 1.0A	14.95 (pg 3)

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

JAMECO ReliaPro

AC-to-DC Unregulated Linear Wall Adapters

Input: 120VAC @ 60Hz

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

★Web Code: UAP

◆ Polarity 1 (+)—(−) (center negative)
Polarity 2 (−)—(+) (center positive)
Female(F) Male(M)

2099921

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	Pricing 10	Pricing 50	Pricing 250
2126109	ReliaPro	K12D045025023U	4.5	250	2.1mm x 5.5mm F **2**	2.3 x 1.5 x 1.4	Black	6'	0.3	UL/CUL	$3.95	$3.49	$2.95	$2.59
112070	ReliaPro	DBU050022Z5480	5	225	2.5mm x 5.5mm F **2**	1.9 x 2.2 x 2.0	Black	7'	0.3	UL/CUL	5.95	5.49	4.95	4.49
2125536	CUI Inc	DPD050025	5	250	2.1mm x 5.5mm F **2**	2.2 x 1.5 x 1.4	Black	6'	0.3	UL/CUL	2.95	2.59	2.25	1.95
155601	ReliaPro	DCU050100B3582	5	1000	2.1mm x 5.5mm F **2**	2.6 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
1918657	ReliaPro	DDU050100	5	1000	2.5mm x 5.5mm F **2**	3.2 x 2.2 x 1.9	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
101266	ReliaPro	DBU060050E3860	6	500	2.1mm x 5.5mm F **2**	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CUL	6.95	6.25	5.59	4.95
15544	ReliaPro	DBU060050Z8371	6	500	3.5mm M **2**	2.4 x 1.9 x 1.6	Black	6'	0.4	UL/CUL	6.95	6.25	5.59	4.95
147707	ReliaPro	DBU060080C6962	6	800	2.1mm x 5.5mm F **2**	2.3 x 2.0 x 1.6	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
220943	ReliaPro	DCU060120G2401	6	1200	2.1mm x 5.5mm F **1**	2.5 x 2.0 x 1.7	Black	6'	0.7	UL/CUL	9.95	8.95	7.95	6.95
220951	ReliaPro	DCU075100G2291	7.5	1000	2.1mm x 5.5mm F **1**	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	8.95	7.95	6.95	5.95
248751	ReliaPro	AD-071A	7.5	1000	2.5mm x 5.5mm F **2**	2.3 x 2.3 x 1.9	Black	6'	0.9	UL/CSA	5.95	5.49	4.95	4.59
355936	ReliaPro	DBU090020	9	200	1.3mm x 3.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.35	4.79	4.39
134025	ReliaPro	DBU090020Z6100	9	200	2.1mm x 5.5mm F **1**	2.1 x 1.7 x 1.6	Black	6'	0.4	UL/CUL	5.95	5.35	4.79	4.39
2100152	ReliaPro	AP2911	9	200	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	3.95	3.49	2.95	2.59
100845	ReliaPro	DBU090020E0850	9	200	2.1mm x 5.5mm F **2**	2.1 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.59
2082556	ReliaPro	5-2616	9	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.4 x 1.4	Black	6'	0.5	UL/CUL	3.95	3.49	2.95	2.59
2082548	Atlinks	5-2617	9	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.4 x 1.4	Gray	6'	0.5	UL/CUL	2.95	2.49	1.95	1.75
2138847	ReliaPro	D6300-01	9	200	2.5mm M **2**	2.2 x 1.7 x 1.4	Black	6'	0.4	UL/CSA	3.95	3.49	2.95	2.59
133891	ReliaPro	DBU090030C112	9	300	2.1mm x 5.5mm F **2**	2.0 x 1.5 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
318676	ReliaPro	DBU090030H5790	9	300	2.5mm x 5.5mm F **1**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	5.49	4.95
1949120	ReliaPro	AD35-0900300DU	9	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL	4.95	4.49	3.95	3.59
189238	ReliaPro	DBU090030H4540	9	300	2.5mm x 5.5mm F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	6.95	5.95	4.95	4.49
163628	ReliaPro	DCU090050Z7484	9	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
100853	ReliaPro	DCU090050E2961	9	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.25	5.49
236937	ReliaPro	DCU090050G6440	9	500	2.5mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.7	Black	6'	0.4	UL/CUL	7.95	6.95	6.25	5.49
15561	ReliaPro	DCU090050A2011	9	500	3.5mm M **2**	2.5 x 2.0 x 1.6	Black	6'	0.5	UL/CSA	7.95	6.95	6.25	5.49
202180	ReliaPro	DCU090060F2091	9	600	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
100175	ReliaPro	DCU090060Z6652	9	600	2.5mm x 5.5mm F **2**	2.7 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	5.95	5.49
164929	ReliaPro	DDU090100C2550	9	1000	2.1mm x 5.5mm F **1**	2.7 x 2.3 x 1.8	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
421690	ReliaPro	SA48-29A	9	1000	2.1mm x 5.5mm F **2**	3.1 x 2.2 x 1.8	Black	6'	1.1	UL/CSA	6.95	5.95	4.95	3.95
2179542	ReliaPro	ADP2108GT	9	1000	2.1mm x 5.5mm right angle F **2**	2.6 x 2.2 x 1.9	Black	6'	0.9	UL/CSA	7.95	6.95	5.95	5.49
364576	ReliaPro	DDU090100J0490	9	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2099905	Golden Regent	W48D-H1000	9	1000	2.5mm x 5.5mm F **1**	3.2 x 2.3 x 1.9	Black	6'	0.9	UL/CUL	2.95	2.49	1.95	1.59
2099913	ENG Electric*	T48-9-1000D3	9	1000	2.5mm x 5.5mm F **1** (Euro plug)	3.2 x 2.3 x 1.9	Black	6'	1.1	CE/TUV	2.95	2.49	1.95	1.59
2099921	ENG Electric*	T48-9-1000D4	9	1000	2.5mm x 5.5mm F **1** (UK plug)	3.2 x 2.3 x 1.9	Black	6'	0.9	CE/TUV	2.95	2.49	1.95	1.59
127505	ReliaPro	DDU090100	9	1000	2.5mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
130526	ReliaPro	DDE090120F3621	9	1200	2.1mm x 5.5mm F **1**	2.4 x 2.0 x 1.8	Black	6'	1.0	UL/CSA	9.95	8.95	7.95	6.95
2082193	Philips	SPA-3545-81	12	100	2.1mm x 5.5mm F **2**	2.5 x 1.8 x 1.5	Black	6'	0.5	UL/CSA	3.49	2.95	2.49	1.95
100095	ReliaPro	DBU120020	12	200	2.1mm x 5.5mm F **2**	2.1 x 1.8 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
158043	ReliaPro	DBU120020E2261	12	200	2.1mm x 5.5mm right angle F **2**	2.2 x 1.7 x 1.5	Black	6'	0.4	UL/CUL	5.95	5.49	4.95	4.49
2167226	ReliaPro	4292A	12	200	2.5mm x 5.5mm F **2**	2.3 x 2.1 x 1.6	Black	6'	0.5	UL/CSA	5.49	4.95	4.49	3.95
127976	ReliaPro	DCU120030D7161	12	300	2.1mm x 5.5mm F **2**	2.6 x 1.8 x 1.6	Black	6'	0.7	UL/CUL	7.95	6.95	5.95	4.95
114825	ReliaPro	DCU120050D4740	12	500	Stripped & tinned	2.5 x 2.0 x 1.7	Black	6'	0.6	UL/CUL	7.95	6.95	6.59	5.95
15368	ReliaPro	DCU120050Z8698	12	500	2.1mm x 5.5mm F **1**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	6.95	6.59	5.95
102496	ReliaPro	DCU120050E8601	12	500	2.1mm x 5.5mm F **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
102277	ReliaPro	DCU120050UE2631	12	500	2.5mm x 5.5mm F **2**	2.5 x 2.1 x 1.7	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
17267	ReliaPro	DCU120050Z5391	12	500	3.5mm M **2**	2.5 x 1.9 x 1.6	Black	6'	0.6	UL/CUL	7.95	7.29	6.59	5.95
2167373	ReliaPro	MW41-1200600	12	600	2.1mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CUL	6.95	6.49	5.95	5.49
2167365	ReliaPro	A31265	12	600	2.1mm x 5.5mm right angle F **2**	2.5 x 2.0 x 1.6	Black	6'	0.7	UL/CSA	6.95	6.49	5.95	5.49
202219	ReliaPro	DCU120070F2142	12	700	2.1mm x 5.5mm F **2**	3.3 x 2.9 x 2.3	Black	6'	0.6	UL/CUL	8.95	7.95	7.29	6.49
117479	ReliaPro	DDU120080E6451	12	800	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
129331	ReliaPro	DDU120080F2412	12	800	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
121232	ReliaPro	DDU120080F2271	12	800	3.5mm M **2**	2.6 x 2.4 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.49	6.95
100870	ReliaPro	DDU120100Z7974	12	1000	2.1mm x 5.5mm F **2**	2.6 x 2.4 x 1.9	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	7.29
105478	ReliaPro	DDU120100Z2993	12	1000	2.5mm x 5.5mm F **2**	3.1 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
15392	ReliaPro	DDU120100E7302	12	1000	3.5mm M **2**	3.3 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29

* 240VAC 50Hz

More AC-to-DC Wall Adapters listed on pages 2-4 & 6

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

JAMECO ReliaPro AC-to-DC Unregulated Linear Wall Adapters (Continued)

★Web Code: UAP

Input: 120VAC @ 60Hz

We specialize in Wall Adapters – Call for additional OEM PRICING.

We are happy to change any listed DC wall adapter power plug to a connector of your choice (see pg 10) for just $2.50 each. Overmolding also available @ $4.00 each. A 100 pc. minimum order applies.

Female Male Female Right Angle

◆ Polarity 1 (center negative)
Polarity 2 (center positive)
Female(F) Male(M)

123158

Part No.	Manufacturer	Product No.	Output Rating Voltage (VDC)	Output Rating Current (mA)	Output Connector ID x OD mm Female/Male; Polarity ◆	Size (H" x W" x D")	Case Color	Output Cord Length	Wt. (lbs.)	Agency Approvals	Pricing 1	10	50	250
2125991	CUI Inc	57-12-1200D	12	1200	2.1mm x 5.5mm F **2**	3.6 x 2.6 x 2.1	Black	6'	1.4	UL/CUL	$8.95	$7.95	$6.95	$5.95
196779	ReliaPro℞	DDU120120G0031	12	1200	2.5mm x 5.5mm F **2**	3.0 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
203036	ReliaPro℞	DDU120150H4530	12	1500	2.1mm x 5.5mm F **1**	3.3 x 2.2 x 1.9	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
136881	ReliaPro℞	DDU120150K1960	12	1500	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
101291	ReliaPro℞	DDU120150	12	1500	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.5	UL/CUL	15.95	14.95	13.49	11.95
2173028	ENG℞	57-12-2000D	12	2000	2.1mm x 5.5mm F **2**	3.4 x 2.6 x 2.2	Black	6'	1.7	UL/CUL	17.95	16.49	14.95	12.49
308099	ReliaPro℞	DDU135100H3210	13.5	1000	2.1mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2135582	Ault	P48131000A010G	13.5	1000	2.5mm x 5.5mm right angle F **2**	3.2 x 2.2 x 1.9	Black	6'	1.1	UL/CSA	6.95	5.95	4.95	3.95
123932	ReliaPro℞	DDU140070Z7470	14	700	2.1mm x 5.5mm F **2**	2.6 x 2.4 x 2.0	Black	6'	1.0	UL/CUL	8.95	7.95	6.95	6.25
202260	ReliaPro	DDU140100F3270	14	1000	2.1mm x 5.5mm F **2**	3.9 x 2.9 x 2.4	Black	6'	0.9	UL/CUL	9.95	8.95	7.95	6.95
2172720	Globtek℞	WD1G500CCP-N	15	500	2.1mm x 5.5mm F **2**	3.2 x 2.3 x 1.9	Black	6'	0.8	UL/CUL	7.95	6.95	6.25	5.49
190001	ReliaPro℞	DCU150050E3021	15	500	2.1mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
189982	ReliaPro	DCU150050E3031	15	500	2.5mm x 5.5mm F **2**	2.3 x 2.4 x 1.9	Black	6'	0.8	UL/CUL	8.95	7.95	7.29	6.49
2135427	Ventronics	D48W150900-14/1	15	900	2.1mm x 5.5mm F **2**	2.5 x 2.2 x 2.0	Black	6'	0.8	UL/CUL	7.95	6.95	5.95	4.95
203502	ReliaPro	DDU150090F4480	15	900	2.5mm x 5.5mm F **2**	2.6 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	7.95	6.95	5.95	4.95
191652	ReliaPro℞	DDU150100D7051	15	1000	2.1mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
2167525	ReliaPro	DDU150100RR2200	15	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.0	UL/CUL	10.95	9.95	8.95	7.95
162317	ReliaPro	DDU165050J19910	16	500	2.1mm x 5.5mm F **2**	2.5 x 2.0 x 1.7	Black	6'	0.8	UL/CUL	9.95	8.95	7.95	7.29
217541	NiteRider	FE4116168C030	16.8	300	2.5mm x 5.5mm F **2**	3.1 x 2.1 x 1.6	Black	6'	0.6	UL/CUL	2.95	2.59	2.29	1.95
2081713	DVE	DV-1790	17	900	2.5mm x 5.5mm F **2**	3.2 x 2.2 x 2.0	Black	6'	1.2	UL/CSA	2.95	2.59	1.95	1.59
217568	NiteRider	FE4126180P040	18	400	2.5mm x 5.5mm F **2 (w/ LED indicator)**	3.5 x 2.1 x 1.6	Black	6'	0.8	UL/CUL	3.95	3.49	2.95	2.59
163272	ReliaPro	DDU180050C1031	18	500	2.1mm x 5.5mm F **2**	2.6 x 2.3 x 1.9	Black	6'	0.8	UL/CUL	6.95	5.95	4.95	4.49
206958	ReliaPro	DDU180100H4551	18	1000	2.5mm x 5.5mm F **2**	3.3 x 2.2 x 1.9	Black	6'	1.4	UL/CUL	10.95	9.95	8.95	7.95
102285	ReliaPro℞	DDU240040Z7860	24	400	2.1mm x 5.5mm F **2**	3.0 x 2.3 x 2.0	Black	6'	0.9	UL/CUL	8.95	7.95	7.29	6.49
163635	ReliaPro℞	DDU240050C1981	24	500	2.1mm x 5.5mm F **1**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
191556	ReliaPro℞	DDU240050E5852	24	500	2.5mm x 5.5mm F **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
139088	ReliaPro	DDU240050E9160	24	500	3.5mm M **2**	3.1 x 2.3 x 1.9	Black	6'	1.0	UL/CUL	9.95	8.95	7.95	7.29
1918930	ReliaPro℞	DDU240060L260	24	600	2.1mm x 5.5mm F **2**	2.9 x 2.2 x 1.9	Black	6'	0.4	UL/CUL	8.95	7.95	6.95	5.95
168495	ReliaPro℞	DFU240080J3180	24	800	2.1mm x 5.5mm F **2**	2.9 x 1.9 x 1.6	Black	6'	0.4	UL/CUL/TUV	12.95	11.95	10.95	9.95
220960	ReliaPro℞	DFU240100G2300	24	1000	2.1mm x 5.5mm F **1**	3.4 x 2.7 x 2.2	Black	6'	1.6	UL/CUL	14.95	13.49	11.95	9.95
249121	ReliaPro℞	DFU240120/G8520	24	1150	2.1mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	14.49	12.95
249113	ReliaPro	DFU240120/G8510	24	1150	2.5mm x 5.5mm F **2**	3.4 x 2.7 x 2.2	Black	6'	1.7	UL/CUL	17.95	15.95	14.49	12.95
199523	ReliaPro	DDU300050E9340	30	500	2.5mm x 5.5mm F **2**	2.9 x 2.3 x 1.9	Black	6'	1.1	UL/CUL	10.95	9.95	8.95	7.95
15309	ReliaPro℞	900-051	3, 4.5, 6, 7.5, 9, 12	500	1.3x3.5, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male**, 9V battery snap (LED ind.)	3.0 x 2.2 x 2.1	Black	6'	0.7	UL/CSA	9.95	8.95	7.95	6.95
2167621	Seven Star	SS104*	1.5, 3, 4.5, 6, 7.5, 9, 12	500	0.7x2.3, 1.5x4, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male** (LED indicator)	3.3 x 2.0 x 1.9	Black	6'	0.8	—	10.95	9.95	8.95	7.95
123158	ReliaPro℞	900-100*	1.5, 3, 4.5, 6, 7.5, 9, 12	1000	1.3x3.5, 2.1x5, 2.5x5.5 **Female** 2.5, 3.5 **Male**, 9V battery snap (LED ind.)	3.7 x 2.2 x 2.5	Black	6'	0.9	—	11.95	10.95	9.95	8.95

*110/220VAC input voltage

More AC-to-DC Wall Adapters listed on pages 2-5

GlobTek® AC-to-DC Medical Table-Top Regulated Switching Power Supplies

★Web Code: WBM

- **2.5mm x 5.5mm female center positive**
- Input voltage: 90-264VAC @ 47-63Hz
- Leakage current: 0.1mA max.
- Regulation (line & load): ±5%
- Isolation voltage: 4,000VAC • 3-wire AC input
- Ripple & noise: 1% or 100mV, whichever is smaller
- Cord lengths: DC: 6'; AC: not included use P/N 132011, pg 14
- Size: 2.9"L x 2.0"W x 1.6"H

Part No.	Mfr. Part No.	Power (W)	Output VDC/Amps	Pricing 1	5	25
2179606	TR9CB2500LCP℞	15.0	+6/2.5	$29.95	$26.95	$22.95
230683	TR9CE1250CP℞	15.6	+12/1.3	34.95	29.95	24.95
230763	TR9CE4000LCP	49.2	+12/4.1	54.95	49.95	45.95
230798	TR9CI2100LCP	50.4	+24/2.1	59.95	53.95	47.95

★Interchangeable Power Supplies, Adapters and Tips — Enter Web Code NBH

Accessory Power Input Cords for Table-Top Power Supplies

★Web Code: UBF

189587

38050

1951123

Part No.	Ref. No.*	Description	Color	AWG	Certification	Cord Length	Wt. (lbs.)	Cord Type	1	10	50	250
189587	1	2-conductor power cord (Figure 8 style)℞	Black	18/2	UL/CSA	6'	0.3	SPT	$2.95	$2.69	$2.39	$2.19
38050	2	3-conductor power cord℞	Black	18/3	UL/CSA	6'	0.4	SVT	4.95	4.49	3.95	3.59
1953559	3	3-conductor flat power cord (Mickey Mouse™ style)	Black	18/3	UL/CSA	6'	0.4	SPT-2	2.95	2.59	2.29	1.95
1951123	3	3-conductor round power cord (Mickey Mouse™ style)℞	Black	18/3	UL/CSA	6'	0.4	SVT	3.49	2.95	2.49	2.19

*These reference numbers for "AC cord needed" for Table-Top Power Supplies on pages 7-9

More Power Cords on page 14

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated & Unregulated Linear & Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 10) for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

2155006

2099569

1940299

2155321

2115549

◆ Polarity 1 ⊕—●—⊖ (center negative)
Polarity 2 ⊖—●—⊕ (center positive)

Female (F)

Male (M)

DIN (M)

Stripped

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD/F = female; M = male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	5	25
2-Wire AC Input – Unregulated Linear Table-Top												★Web Code: TBE		
2155006	Lite-On	PB-1090-1L1	+12/0.75	2.5mm x 5.5mm F 2	120@60	9	No	3.2 x 2.2 x 1.9	6'/6'	1.1	UL/CUL	$7.95	$6.49	$4.95
140880	ReliaPro	DC1215ST	+12/1.5	Stripped & Tinned	120@60	18	No	3.1 x 2.1 x 1.9	6'/6'	1.5	UL	12.95	11.95	10.95
143715	ReliaPro	DC1220F1	+12/2.0	2.1mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.95	13.95
143722	ReliaPro	DC1220F5	+12/2.0	2.5mm x 5.5mm F 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	2.2	UL/CUL	15.95	14.95	13.95
143731	ReliaPro	DC1220M3	+12/2.0	3.5mm M 2	120@60	24	No	3.8 x 2.8 x 2.3	6'/6'	1.9	UL/CUL	14.95	13.49	11.95
2099569	ReliaPro	57-1607-U4D	+16/0.7	2.5mm x 5.5mm F 2	120@60	19	No	3.6 x 2.7 x 3.6	6'/6'	1.3	UL	3.95	3.49	2.95
174845	ReliaPro	GQ-ADT57250-0044	+24/1.0	2.1mm x 5.5mm F 2	120@60	24	No	3.4 x 2.6 x 2.2	6'/6'	2.6	UL	17.95	15.95	14.49
139096	ReliaPro	EHU240120	+24/1.2	2.1mm x 5.5mm F 2	120@60	29	No	4.4 x 3.1 x 2.6	6'/6'	2.5	—	15.95	14.95	13.95
2-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: DDZ		
1940299	Mean Well	GS18B05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.1 x 2.1 x 1.3	4'/ 1	0.5	UL/CUL/TUV/CE	$13.49	$12.49	$11.25
1940310	Mean Well	GS18809-P1J	+9/2.0	2.1mm x 5.5mm F 2	90-264@47-63	18	Yes	3.1 x 2.1 x 1.3	6'/ 1	0.5	UL/CUL/TUV/CE	13.49	12.49	11.25
191353	Delta	ADP-15FB	+12/1.25	2.1mm x 5.5mm F 2	100-240@50-60	15	No	3.5 x 2.3 x 1.2	6'/ 1	0.5	UL/CE	8.95	7.95	6.95
1940328	Mean Well	GS18B12-P1JT	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.1 x 2.1 x 1.3	6'/6'	0.5	UL/CUL/TUV/CE	14.95	13.95	12.49
2167445	ReliaPro	ADPV16	+12/3.0	2.1mm x 5.5mm F 2	100-240@50-60	36	No	3.6 x 1.6 x 1.1	5'/ 1	0.4	UL/CUL/CE/CSA	22.95	19.95	17.95
2155321	ReliaPro	PA1045-120T2B375-APF02	+12/3.75	2.1mm x 5.5mm F 2	90-264@50-60	45	Yes	4.3 x 2.1 x 1.2	6'/ 1	0.5	UL/CUL/TUV/CE	24.95	22.49	19.95
2155330	ReliaPro	PA1045-120T2B375-APF04	+12/3.75	2.5mm x 5.5mm F 2	90-264@50-60	45	Yes	4.3 x 2.1 x 1.2	6'/ 1	0.5	UL/CUL/TUV/CE	24.95	22.49	19.95
1940521	Mean Well	GS25B15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.1 x 2.1 x 1.3	6'/ 1	0.5	UL/CUL/TUV/CE	14.25	12.95	11.49
1940547	Mean Well	GS25B24-P1J	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/ 1	0.5	UL/CUL/TUV/CE	14.25	12.95	11.49
221613	Mean Well ✓	P30B-6P2JT	+24/1.12	2.1mm x 5.5mm F 2	100-240@50-60	27	Yes	4.3 x 2.6 x 1.4	6'/6'	0.8	UL/CUL/TUV/CE	19.95	17.95	16.95
2158021	Phihong	PSAC60W-240-R	+24/2.5	2.1mm x 5.5mm F 2	100-240@50-60	60	No	5.1 x 2.4 x 1.3	4'/ 1	0.5	UL/CUL	39.95	36.95	33.95
1707139	Mean Well	ES25B48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.1 x 2.1 x 1.3	6'/ 1	0.4	UL/CUL/TUV/CE	12.95	11.95	10.49
2-Wire AC Input – Regulated Switching Table-Top – Triple Output												★Web Code: TTO		
196138	DVE	DSA-0283A	+5/1, +12/1.49 -5/0.43 (Requires 20% min. load on all outputs)	5-pin DIN M	100-240@47-63	23	No	4.9 x 2.7 x 1.5	6'/ 1	0.8	UL/CSA/TUV	$3.95	$3.59	$3.25
3-Wire AC Input – Regulated Switching Table-Top – Single Output												★Web Code: DDZ		
2115549	ReliaPro	217-03814	+5/0.5	2.1mm x 5.5mm F 2	100-240@50-60	2.5	No	3.1 x 2.0 x 1.2	6'/ 2	0.4	UL/CSA	$4.95	$3.95	$3.49
308700	ReliaPro	ZD0001F	+5/1.0	2.1mm x 5.5mm F 2†	100-240@50-60	5	No	4.2 x 2.0 x 1.6	6'/ 2	0.4	UL/CUL/TUV/CE	5.95	4.95	3.95
309876	ReliaPro	GI12-USO520	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	2.6 x 1.9 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	9.95	8.95	7.95
196218	GlobTek	GT-21089-1305T3	+5/2.0	2.1mm x 5.5mm F 2	120-240@50-60	10	No	3.4 x 1.9 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	15.95	14.49	12.95
1955642	Delta	ADP-105B	+5/2.0	2.1mm x 5.5mm F 2	100-240@50-60	10	No	3.3 x 1.9 x 1.2	6'/ 2	0.3	UL/CUL/CE	5.95	4.95	4.49
1954236	Mean Well	GS15A-1P1J	+5/2.4	2.1mm x 5.5mm F 2	90-264@47-63	12	No	3.9 x 2.3 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	15.95	14.49	12.95
2115506	OEM	SYS1089-1305-T3	+5/2.6	2.1mm x 5.5mm F 2	100-240@50-60	13	No	3.4 x 1.8 x 1.3	6'/ 2	0.3	UL/CUL/CE	6.95	5.95	4.95
1940387	Mean Well	GS18A05-P1J	+5/3.0	2.1mm x 5.5mm F 2	100-240@50-60	15	Yes	3.7 x 2.1 x 1.4	4'/ 2	0.5	UL/CUL/TUV/CE	13.49	12.49	11.25
1940571	Mean Well	GS25A05-P1J	+5/4.0	2.1mm x 5.5mm F 2	100-240@50-60	20	Yes	3.7 x 2.1 x 1.4	4'/ 2	0.5	UL/CUL/TUV/CE	14.25	12.95	11.49
1952337	Mean Well	GS40A05-P1JU	+5/5.0	2.1mm x 5.5mm F 2	90-264@47-63	25	Yes	4.9 x 2.0 x 1.2	4'/ 2	0.7	UL/CUL/TUV/CE	18.49	16.95	14.95
2135700	Condor	HK-D530-A05	+5/6.0	2.5mm x 5.5mm F 2	100-240@50-60	30	No	4.7 x 2.1 x 1.3	8'/ 2	0.5	UL/CUL/TUV/CE	19.95	17.95	15.95
320081	GlobTek	TR9CA6000LCP-Y	+5/6.0	2.5mm x 5.5mm F 2	100-240@50-60	30	Yes	4.7 x 2.4 x 1.3	6'/ 2	0.7	UL/CUL/TUV/CE	39.95	35.95	31.95
2144956	ReliaPro	GQ65-060330-EI	+6/3.3	2.1mm x 5.5mm F 2	100-240@50-60	20	No	3.6 x 2.0 x 1.3	6'/ 3	0.3	UL/TUV/CE	17.95	15.95	13.95
206529	Mean Well	GS40A07-P1J	+7.5/5.34	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.9 x 2.0 x 1.3	4'/2'	1.5	UL/CUL/TUV/CE	18.49	16.95	14.95
2103118	Mean Well	GS60A07-P1J	+7.5/6.0	2.1mm x 5.5mm F 2	90-264@47-63	45	Yes	4.9 x 2.0 x 1.2	3.3'/ 2	0.7	UL/CUL/TUV/CE	20.49	18.49	16.95
2173036	Phihong	PSA18U-090	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.9 x 2.2 x 1.2	5'/ 2	0.5	UL/CUL/TUV/CE	11.95	10.95	9.95
1940408	Mean Well	GS18A09-P1J	+9/2.0	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/ 2	0.6	UL/CUL/TUV/CE	13.49	12.49	11.25
2102916	Mean Well	GS40A09-P1J	+9/4.5	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/ 2	0.6	UL/CUL/TUV/CE	18.49	16.95	14.95
1952361	Mean Well	GS60A09-P1J	+9/6.0	2.1mm x 5.5mm F 2	90-264@47-63	54	Yes	4.9 x 2.0 x 1.3	4'/ 2	0.7	UL/CUL/TUV/CE	20.49	18.49	16.95
1955651	ELPAC	W0812	+12/0.67	2.5mm x 5.5mm F 2	100-240@47-63	8	No	3.3 x 1.9 x 1.2	6'/6'	0.8	UL/CUL/TUV/CE	8.95	7.95	6.95
2150782	ReliaPro	GQ65-120100EI	+12/1.0	2.1mm x 5.5mm F 2	100-240@50-60	12	No	3.6 x 1.9 x 1.3	6'/ 2	0.3	TUV(US)/TUV/CE	14.95	13.95	12.49
1954244	Mean Well	GS15A-3P1J	+12/1.25	2.1mm x 5.5mm F 2	90-264@47-63	15	No	3.9 x 2.3 x 1.3	6'/ 2	0.4	UL/CUL/TUV/CE	15.95	14.49	12.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord † Right angle

✓CEC Equivalent available. Add a "C" before part number for CEC version. CEC

3-Wire Regulated Table-Top Power Supplies continued on next page

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

AC-to-DC Regulated Switching Table-Top Power Supplies

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 10) for just $2.50 ea. Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

2155364

2172771

2099294

2139006

2172789

◆ Polarity 1 ⊕—C—⊖ (center negative)
Polarity 2 ⊖—C—⊕ (center positive)

Female (F)

Female Right Angle

DIN (M)

See page 13 for International Power Cords

Part No.	Manufacturer	Product No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD mm Female/Male; Polarity ◆	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	5	25
3-Wire AC Input – Regulated Switching Table-Top – Single Output (Continued)												★Web Code: DDZ		
2150993	DVE	DSA-0151D-12	+12/1.5	2.1mm x 5.5mm F 2†	100-240@47-63	18	No	3.9 x 2.0 x 1.3	6'/2	0.5	UL/CSA/TUV/CE	$9.95	$8.95	$7.95
2135558	Joden	JSE-02512-9	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	No	3.4 x 2.2 x 1.3	6'/2	0.5	UL/CUL/TUV	9.95	8.95	7.95
1940416	Mean Well	GS18A12-P1JU	+12/1.5	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	13.49	12.49	11.25
2135507	SPC Technology	SA121A6F-11	+12/1.6	2.1mm x 5.5mm F 2	100-250@47-63	19	No	3.2 x 2.2 x 1.9	6'/2	0.2	UL/CUL/TUV/CE	10.95	9.95	8.95
2135515	SPC Technology	SA122A0U-11	+12/2.0	2.1mm x 5.5mm F 2	100-250@47-63	24	No	3.2 x 2.2 x 1.9	6'/2	0.2	UL/CUL/TUV	11.95	10.95	9.95
2099868	DVE	DSA-0421S	+12/2.0	2.1mm x 5.5mm F 2	100-240@50-60	24	Yes	3.7 x 2.2 x 1.3	6'/6'	0.4	UL/CUL/TUV/CE	12.95	11.95	10.95
2155364	DVE	DSA-0421-12	+12/2.0	2.5mm x 5.5mm F 2	100-240@50-60	24	Yes	3.7 x 2.2 x 1.3	6'/6'	0.4	UL/CUL/TUV/CE	12.95	11.95	10.95
1940601	Mean Well	GS25A12-P1JU	+12/2.08	2.1mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	4'/6'	0.5	UL/CUL/TUV/CE	14.25	12.95	11.49
2154978	ReliaPro	GQ65120250-E1	+12/2.5	2.5mm x 5.5mm F 2	100-240@50-60	30	No	3.6 x 1.9 x 1.3	6'/2	0.5	TUV(US)/CE	19.95	17.95	15.95
2129158	Sparkle Power	FSP040-DGAA1	+12/3.33	2.1mm x 5.5mm F 2	100-240@50-60	40	Yes	4.3 x 2.0 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	20.95	18.95	16.95
1952345	Mean Well	GS40A12-P1J	+12/3.34	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	18.49	16.95	14.95
2079357	Mean Well	GS40A12-P1M	+12/3.34	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.3	4'/2	0.7	UL/CUL/TUV/CE	18.49	16.95	14.95
1940264	ReliaPro	EA1050E	+12/3.5	2.1mm x 5.5mm F 2	100-240@50-60	42	Yes	4.7 x 2.4 x 1.4	4'/2	0.6	UL/CUL/TUV/CE	17.95	16.49	14.49
1940272	ReliaPro	GQ65-120416-EI	+12/4.16	2.1mm x 5.5mm F 2	100-240@50-60	50	Yes	4.5 x 1.9 x 1.4	4'/2	0.6	TUV(US)/CE	18.95	17.95	15.95
2158485	Power-One	3F42050	+12/4.2	2.1mm x 5.5mm F 2†	100-240@50-60	50	Yes	4.7 x 2.4 x 1.4	6'/6'	—	UL/CUL/CE	18.95	16.95	14.95
1952370	Mean Well	GS60A12-P1J	+12/5.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 1.9 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	20.49	18.49	—
2172771	ReliaPro	EA1050A-120	+12/5.0	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.7 x 2.4 x 1.4	4'/2	0.7	UL/CUL/TUV/CE	19.95	17.95	15.49
2099420	Sparkle Power	FSP060-DBAB1	+12/5.0	2.5mm x 5.5mm F 2†	100-240@50-60	60	Yes	4.3 x 2.4 x 1.2	5'/2	0.5	UL/CUL/TUV/CE	27.95	24.95	22.95
2078291	Mean Well	GS90A12-P1M	+12/6.67	2.5mm x 5.5mm F 2	100-240@50-60	80	Yes	5.7 x 2.3 x 1.3	4'/2	0.9	UL/CUL/TUV/CE	34.25	30.95	27.95
2129617	Lishen	0219B1280	+12/6.67	4-pin DIN M	100-240@50-60	80	Yes	5.9 x 2.3 x 1.3	6'/2	1.0	UL/CUL/TUV	19.95	18.95	17.95
221429	Mean Well	U65S105-P2JU	+12/6.7	2.1mm x 5.5mm F 2	100-240@50-60	80	Yes	6.6 x 3.1 x 1.8	6'/6'	2.0	UL/CUL/TUV/CE	41.95	38.95	35.95
2129211	Mean Well	GS120A12-R7B	+12/8.5	4-pin DIN M	85-264@47-63	102	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	55.95	49.95	44.95
2099294	Mean Well	GS220A12-R7B	+12/15	4-pin DIN M	90-264/127-370@47-63	180	Yes	8.3 x 3.4 x 1.8	3.3'/2	2.4	UL/CUL/TUV/CE	91.95	83.95	74.95
2139006	ENG Electric	3G-301DN13	+13.5/2.2	4-pin Molex	100-240@50-60	30	No	4.6 x 1.9 x 1.2	2'6"/5'	0.8	UL/CUL	7.95	6.95	5.95
1940432	Mean Well	GS18A15-P1JU	+15/1.2	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	13.49	12.49	11.25
1940619	Mean Well	GS25A15-P1J	+15/1.66	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	14.25	12.95	11.49
2171559	Mean Well	GS40A15-P1JU	+15/2.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	3.3'/6'	0.6	UL/CUL/TUV/CE	19.95	17.95	15.95
1954295	Mean Well	GS60A15-P1J	+15/4.0	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	4'/2	0.7	UL/CUL/TUV/CE	20.49	18.49	—
2078320	Mean Well	GS90A15-P1M	+15/6.0	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.7 x 2.3 x 1.3	3'3"/2	0.8	UL/CUL/TUV/CE	34.25	30.95	27.95
2145107	SYN Electronics	SYS-1097-4018	+18/2.2	2.1mm x 5.5mm F 2	100-240@47-63	40	Yes	4.7 x 2.4 x 1.3	4'/2	0.7	UL/TUV/CE	14.95	13.49	11.95
2102764	Mean Well	GS60A18-P1J	+18/3.3	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	3.3'/2	0.7	UL/CUL/TUV/CE	20.49	18.49	16.95
2154951	Mean Well	GS60A18-P1JU	+18/3.33	2.1mm x 5.5mm F 2	90-264@50-60	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.8	UL/CUL/TUV/CE	20.49	18.49	16.95
1940459	Mean Well	GS18A24-P1J	+24/0.75	2.1mm x 5.5mm F 2	100-240@50-60	18	Yes	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	13.49	12.49	11.25
1940635	Mean Well	GS25A24-P1JU	+24/1.04	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6'/6'	0.5	UL/CUL/TUV/CE	15.95	15.49	14.95
380577	Mean Well	ES25A24-P1MU	+24/1.04	2.5mm x 5.5mm F 2	100-240@50-60	25	Yes	3.7 x 2.1 x 1.4	6'/6'	0.6	UL/CUL/TUV/CE	19.95	17.95	15.95
2172789	ReliaPro	EA1030D1	+24/1.25	2.1mm x 5.5mm F 2	100-240@50-60	30	Yes	3.8 x 1.7 x 1.2	6'/6'	0.4	UL/CUL/TUV/CE	15.49	14.95	14.49
1952353	Mean Well	GS40A24-P1J	+24/1.67	2.1mm x 5.5mm F 2	90-264@47-63	40	Yes	4.9 x 2.0 x 1.2	6'/2	0.7	UL/CUL/TUV/CE	18.49	16.95	14.95
1537256	ReliaPro	0H-1048A2401700U-U	+24/1.7	2.5mm x 5.5mm F 2	90-264@47-63	40	Yes	4.5 x 2.0 x 1.3	6'/2	0.5	UL/CUL/CE	18.95	17.95	16.95
1942788	ReliaPro	EA1050B-240	+24/2.5	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6'/2	1.8	UL/CUL/TUV/CE	19.95	18.95	17.49
1952214	Mean Well	GS60A24-P1J	+24/2.5	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.3	6'/2	0.7	UL/CUL/TUV/CE	20.49	18.49	—
1950913	ReliaPro	EA1050B-240	+24/2.5	2.5mm x 5.5mm F 2	100-240@50-60	60	Yes	4.8 x 2.4 x 1.4	6'/2	1.8	UL/CUL/TUV/CE	19.95	18.95	17.49
2172797	ReliaPro	EA11001D-240	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	Yes	5.4 x 2.3 x 0.4	4'/2	0.9	UL/CUL/TUV/CE	32.95	29.95	26.49
2078338	Mean Well	GS90A24-P1M	+24/3.75	2.5mm x 5.5mm F 2	100-240@50-60	90	No	5.9 x 2.3 x 1.2	4'/2	0.9	UL/CUL/TUV/CE	34.25	30.95	27.95
2135208	Mean Well	GS120A24-P1M	+24/5.00	2.5mm x 5.5mm F 2	85-264@47-63	120	Yes	6.6 x 2.6 x 1.4	4'/2	1.4	UL/CUL/TUV/CE	55.95	49.95	44.95
2099286	Mean Well	GS220A24-R7B	+24/9.2	4-pin DIN M	90-264@47-63	220	Yes	8.3 x 3.4 x 1.8	3.3'/2	2.4	UL/CUL/TUV/CE	91.95	83.95	74.95
1940643	Mean Well	GS25A28-P1JU	+28/0.89	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6'/6'	0.7	UL/CUL/TUV/CE	14.25	12.95	11.49
1940651	Mean Well	GS25A48-P1J	+48/0.52	2.1mm x 5.5mm F 2	100-240@50-60	25	No	3.7 x 2.1 x 1.4	6'/2	0.5	UL/CUL/TUV/CE	14.25	12.95	11.49
172065	Mean Well	SPU50-9U	+48/1.25	2.1mm x 5.5mm F 2	100-240@50-60	60	Yes	5.6 x 2.9 x 1.7	6'/6'	1.3	UL/CUL/TUV/CE	20.95	19.49	17.95
1952396	Mean Well	GS60A48-P1JU	+48/1.25	2.1mm x 5.5mm F 2	90-264@47-63	60	Yes	4.9 x 2.0 x 1.2	6'/6'	0.7	UL/CUL/TUV/CE	24.95	22.49	19.95

* See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord † Right angle
CEC

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

AC-to-DC Regulated Switching Table-Top Power Supplies (Continued)

We are happy to change the power plug on any listed table-top power supply to a connector of your choice (see pg 10) for just $2.50 each. A 100 pc. minimum order applies.
Overmolding also available @ $4.00 ea. A 100 pc. minimum order applies.

See page 13 for International Power Cords

DIN (M)

2138880

221702

237367

Part No.	Manufacturer	Manufacturer Part No.	Output Volts (VDC)/ Current (A)	Output Connector ID x OD mm Female/Male; Polarity	Input VAC@Hz	Output Power (W)	LED Ind.	Size (L" x W" x H")	Cords* (DC/AC)	Wt. (lbs.)	Agency Approvals	Pricing 1	5	25
3-Wire AC Input – Regulated Switching Table-Top – Double & Triple Output												★Web Code: TDO		
196270	ReliaPro	PSU25A13	+5/2.5, +12/1.0	4-pin mini DIN M	100-240@47-63	25	No	4.2 x 2.6 x 1.4	6'/4'	1.2	UL/CUL/TUV/CE	$34.95	$31.49	$28.95
2138880	XP Power	AEH45UM23	+5/5.0, +12/2.0	5-pin DIN M	100-240@47-63	42	Yes	5.7 x 3.0 x 1.7	4'/2	1.3	UL/CUL/TUV/CE	19.95	17.95	15.95
190960	Mean Well	P25A13D-R1B	+5/2.5, +12/0.8 -12/0.3	5-pin DIN M	100-240@50-60	26	Yes	4.1 x 2.6 x 1.4	6'/2	1.1	CUL/TUV/CE	29.95	26.95	23.95
221720	Mean Well	P25A14E-R1BU	+5/2.5, +15/0.3 -15/0.3	5-pin DIN M	100-240@50-60	25	Yes	4.3 x 2.6 x 1.4	6'/6'	0.8	UL/CUL/TUV/CE	29.95	26.95	23.95
221702	Mean Well	P50A13D-R1BU	+5/4.0, +12/2.0 -12/0.5	5-pin DIN M	100-240@50-60	50	Yes	5.7 x 3.0 x 1.7	4'/6'	1.5	UL/CUL/TUV/CE	49.95	44.95	39.95
237367	Mean Well	P50A14E-R1B	+5/3.5, +15/1.2 -15/0.3	5-pin DIN M	100-240@47-63	42	Yes	5.8 x 3.0 x 1.7	4'/2	1.2	UL/CUL/TUV/CE	44.95	39.95	36.95

*See accessory table-top power cord chart on page 6 when AC cord needed; refer to 1, 2 or 3 in "Cord (DC/AC)" column above for correct power cord

5VDC @ 200mA USB Wall Adapter

- Works with digital camera, cell phones, PDA, MP3 and other USB devices
- TUV/FCC approved • LED indicator
- Output voltage: 5VDC @ 200mA
- Input volt.: 100-240VAC @ 50/60Hz
- Size: 2.5"H x 1.5"W x 0.8"D
- Cable and tips use P/N 2081625 (right)

Part No.	Mfr. Part No.	1	10	50	100
2138636	SW013US-0500020US	$3.95	$3.49	$2.95	$2.59

USB-A Power Cable w/ Interchangeable Tips

- 4' cable • 26 AWG
- USB-A male connector • UL/CSA approved
- Tips: 1.3mm x 5.5mm female, 1.5mm x 4.8mm female, 1.7mm x 4.8mm female, 2.1mm x 5.5mm female, 2.5mm x 5.5mm female, 2.9mm x 6.3mm female, 1.3mm x 3.3mm female, and 1.3mm x 4.3mm female
- For use with P/N 2138636 wall adapter (left)

Part No.	Cross Ref. No.	1	10	50	250
2081625	USBAC8	$5.95	$4.95	$4.49	$3.95

60 to 800-Watt PC Power Supplies

- Use 3-prong AC receptacle cord P/N 38050 (see page 14)

★Web Code: HCA

††80 Plus Energy Efficient

2081887

2179382

427928

2172754

2188318

AT Power Supplies

Part No.	Mfr.	Mfr. Part No.	Power (W)	Output (VDC/Amps)	Input (VAC @ Hz)	Certification	Size (L" x W" x H")	Wt. (lbs.)	Pricing 1	5	25
249754	Sparkle	SPI-300G	300	+5/30, -5/0.5A, +12V/12A, -12V/0.5A	100-240 @ 50-60 switchable	UL/CSA/TUV FCC	5.5 x 5.9 x 3.4	3.5	$64.95	$58.95	$52.95

ATX Power Supplies

Part No.	Mfr.	Mfr. Part No.	Power (W)	Output (VDC/Amps)	Input (VAC @ Hz)	Certification	Size (L" x W" x H")	Wt. (lbs.)	Pricing 1	5	25
2081887	Enhance	ENP-0185T*	150	+3.3/7, +5/12, +12/5, +5VSB/0.8, -5/0.2, -12/0.3	200-240 @ 50	CUL/TUV/CE	7.5 x 3.3 x 1.7	2.5	$6.95	$6.25	$5.59
2179382	CWT	PSG250B-TO *	250	+3.3/19, +5/20, +12/18, -12/0.5, +5VSB/4	100-240 @ 50-60 switching	CUL/TUV/CE	6.7 x 4.0 x 1.6	2.6	39.95	34.95	29.95
2110422	Sparkle	SPI2501UH-B204 ††	250	+3.3/16 +5/18, +12v1/16, +12v2/16 -12/0.8, -5/0.3, +5VSB/2.5	90-264 @ 47-63 switching	UL/CSA/TUV/ CE/CB††	7.5 x 3.9 x 1.6 (1U)	2.9	79.95	69.95	64.95
427928	Seasonic	SS-300SFD Active PFC * †	300	+3.3/20, +5/20, +12/8, +12/14.5, -12/0.8, +5VSB/2	90-264 @ 47-63 switching	UL/CUL/TUV/CE	5.1 x 4.9 x 2.5	2.7	59.95	53.95	49.95
2179497	FSP	IP-S350AQ2-0	350	+3.3/20, +5/16, +12/10, +12/13 -12/0.3, +5VSB	115/230 @ 50-60 switching	UL/TUV/CE	6.0 x 5.5 x 3.5 (1U)	2.7	34.95	29.95	24.95
2172754	Top MIcro	P6350H1FRS2*	350	+3.3/20, +5/20, +12/16, +12/12, -12/1, +5VSB	115/230 @ 50-60 switching	UL/CUL/TUV/CE	8.0 x 4.0 x 1.5 (1U)	3.0	39.95	34.95	29.95
2188318	Cool Power	CP-G880*	880	+3.3/25, +5/25, +12v1/28, +12v2/28, -12/0.5, +5VSB/2	115/230 @ 50-60 switching	FCC/TUV/CE	5.9 x 5.5 x 3.4	4.3	59.95	53.95	49.95

* See photo above † Comes with SATA ready connector †† 80 Plus energy efficient

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Switchcraft® Male & Female Power Jacks

*Web Code: BAM

Part No.	Mfr.	Product No.	Description Pin Dia. x OD	Dimensions H x W x D (mm)	Type/ Mount	Circuit/ Terminal	1	10	100
101194	ValuePro	PP024R	1.3 x 3.5mm male	6.0 x 6.0 x 9.0	1/D	1/B	$.59	$.55	$.45
2168114	Adam Tech	ADC-002A-1R	2.0 x 6.4mm male	11.0 x 9.0 x 14.3	2/D	1/A	.39	.35	.29
101178	ValuePro	PP014	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	2/D	1/A	.39	.35	.29
101179	ValuePro	PP014R	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	2/D	1/A	.45	.39	.35
137673	ValuePro	PP013R	2.1 x 5.5mm male	10.9 x 9.0 x 14.5	3/D	4/A	.45	.39	.35
151590	ValuePro	DPJ-02IAR	2.1 x 5.5mm male	18.0 x 12.6 Dia.	4/C†	1/A	.89	.79	.69
151555	ValuePro	DPJ-026R§	2.1 x 5.5mm male	21.0 x 8.0 Dia.	5/C	1/A	1.75	1.59	1.39
281851	Switchcraft	722AR§	2.1 x 5.5mm male	21.0 x 8.0 Dia.	7/C	1/A	4.95	4.49	3.95
159611	ValuePro	PJ1014AR	2.1 x 5.5mm male	57.5 x 12.6 Dia.	6/F	3/A	1.75	1.59	1.39
2151136	ValuePro	HD2388CR	2.1 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
2144690	ValuePro	L5225	2.1 x 5.5mm male	11.0 x 9.1 x 14.7	13/D	1/A	.35	.29	.19
207714	ValuePro	HEC0470	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/B	.55	.49	.39
101187	ValuePro	PP014AR	2.5 x 5.5mm male	11.0 x 9.0 x 14.5	2/D	1/A	.55	.49	.45
151563	ValuePro	DPJ-026AR§	2.5 x 5.5mm male	15.1 x 8.0 Dia.	5/E	1/A	1.49	1.35	1.19
159506	ValuePro	PJ1015AR	2.5 x 5.5mm male	57.5 x 12.6 Dia.	6/F	3/A	1.49	1.35	1.19
202358	ValuePro	HD2388	2.5 x 5.5mm male	12.4 x 7.7 Dia.	8/C*	3/A	1.19	.99	.89
281842	Switchcraft	712AR§	2.5 x 5.5mm male	15.8 x 7.5 Dia.	7/C	1/A	4.95	4.49	3.95
297553	Switchcraft	PC712AR§	2.5 x 5.5mm male	23.3 x 11.0 Dia.	9/D	1/A	4.95	4.49	3.95
2144745	ValuePro	J25M	2.5 x 5.5mm male	11.1 x 8.9 x 13.4	14/C	1/A	.35	.29	.19
2168122	Adam Tech	ADC-002A-2R	2.5 x 6.4mm male	11.0 x 9.0 x 14.3	2/D	1/A	.59	.55	.49
101143	ValuePro	PJ0352R#	3.5 mm female	10.0 x 10.0 x 18.5	10/E	2/A	.49	.45	.39
109496	ValuePro	PJ035PMR#	3.5 mm female	10.5 x 9.0 x 20.0	11/C	2/A	.49	.45	.39
165730	ValuePro	PJ0354RR#	3.5 mm female	15.5 x 5.9 Dia.	12/C	3/A	.79	.69	.59
2183218	ValuePro	M6HDWR	Additional panel mounting hardware for jacks indicated with #				.69	.59	.49
281852	Switchcraft	5116-32HDWR	Additional panel mounting hardware for jacks indicated with §				.69	.59	.49

† Center offset *Plastic

Terminals	Code
Solder eyelet	A
PC board	B

Mounting	Code
Panel	C
PCB	D
Panel & PCB	E
Cable	F





Switchcraft® DC Power Plugs & Adapters

*Web Code: MFP

Part No.	Mfr.	Product No.	Fig.	Description (Barrel) Plug ID x OD x L (mm)	Strain Relief ID x L (mm)	1	10	100
71192	ValuePro	PP137R	1	F plug, 1.3 x 3.5 x 9.5	4.1 x 12 (black)	$.79	$.69	$.65
1537395	ValuePro	PL-005R	2	F plug, 1.3 x 3.5 x 9.5 (right angle)	2.8 x 11 (black)	.89	.79	.69
191484	ValuePro	PP049W	1	F plug, 2.1 x 5.5 x 9.0	4.6 x 12.5 (white)	.89	.79	.69
2004890	ValuePro	PP049S	1	F plug, 2.1 x 5.5 x 9.5	4.5 x 12.5 (black)	.89	.79	.69
297617	Switchcraft	S760R	3	F plug, 2.1 x 5.5 x 9.5	5.5 x 25 (black)	3.95	3.49	2.95
28760	ValuePro	PP049R	1	F plug, 2.1 x 5.5 x 9.5 (P205)	4.1 x 12 (black)	.89	.79	.69
2179358	ValuePro	27-1136AR	7	F plug, 2.1 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	3.75	3.49	2.95
2145123	ValuePro	CS1021-A-12MMR	1	F plug, 2.1 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
138587	ValuePro	PJ021	2	F plug, 2.1 x 5.5 x 12 (right angle)	2.8 x 11 (black)	.89	.79	.65
147329	ValuePro	PP049LR	1	F plug, 2.1 x 5.5 x 14 (P205L)	4.3 x 12 (black)	.89	.79	.65
190538	ValuePro	PP109SR	1	F plug, 2.5 x 5.5 x 9.5	4.7 x 13 (black)	.89	.79	.65
281877	Switchcraft	760R	3	F plug, 2.5 x 5.5 x 9.5	5.5 x 25 (black)	3.95	3.59	3.25
28768	ValuePro	PP109R	1	F plug, 2.5 x 5.5 x 9.5 (P206)	4.7 x 13 (black)	.89	.79	.65
2179366	ValuePro	27-1136BR	7	F plug, 2.5 x 5.5 x 9.5 (locking)	6.0 x 25 (black)	3.75	3.49	2.95
2145115	ValuePro	CS1021-B-12MMR	1	F plug, 2.5 x 5.5 x 12	4.3 x 12 (black)	.89	.79	.69
147336	ValuePro	PP109LR	1	F plug, 2.5 x 5.5 x 14 (P206L)	4.2 x 12 (black)	.89	.79	.69
168242	ValuePro	PP109NR	3	F plug, 2.5 x 5.5 x 14	3.9 x 22 (black)	.89	.79	.69
2099163	ValuePro	PL-008R	2	F plug, 2.5 x 5.5 x 9.5 (right angle)	2.8 x 11 (black)	.95	.85	.75
101135	ValuePro	JR-1020	4	M plug, — x 2.5 x 11 (P201)	4.3 x 13 (black)	.69	.59	.49
231176	ValuePro	AP-340R	4	M plug, — x 3.5 x 14 (stereo)	4.3 x 13.5 (black)	.79	.69	.55
231167	ValuePro	AP-343	5	M plug, — x 3.5 x 14 (stereo)	4.4 x 13 (metal)	1.49	1.25	.99
231160	ValuePro	PJ1035R	5	M plug, — x 3.5 x 14 (mono)	4.8 x 13.5 (metal)	1.49	1.25	.99
101152	ValuePro	PJ1035R	4	M plug, — x 3.5 x 14.5 (P202)	4.0 x 13 (black)	.69	.59	.49
2113703	ValuePro	JR1826R	6	Adapter, 2.1mm M to 1.7mm F (1.7"L)	—	1.49	1.35	.99
2112989	ValuePro	JP1828CR	6	Adapter, 2.1mm M to 1.3mm F (1.3"L)	—	1.59	1.45	1.09
1953591	ValuePro	DCJ2.1-DCP2.5R	6	Adapter, 2.1mm M to 2.5mm F (1.4"L)	—	1.59	1.45	1.09
2113009	ValuePro	JP1829R	6	Adapter, 2.5mm M to 1.3mm F (1.3"L)	—	1.29	1.19	.99
2113711	ValuePro	JR1827R	6	Adapter, 2.5mm M to 1.7mm F (1.7"L)	—	1.19	1.09	.95
1953604	ValuePro	DCJ2.5-DCP2.1R	6	Adapter, 2.5mm M to 2.1mm F (1.4"L)	—	1.49	1.35	1.09

DC Extension Power Cables

Part No.	Mfr.	Cross Ref. No.	Description (Barrel) ID x OD x L (mm)	AWG	Color	1	10	100
2099147	ValuePro	DCEXTCORD2.1- 3FTR	2.1F x 2.1M x 3' cable	18	Black	$1.95	$1.75	$1.59
2099121	ValuePro	DCEXTCORD2.1- 6FTR	2.1F x 2.1M x 6' cable	18	Black	2.49	2.25	1.95
2099155	ValuePro	DCEXTCORD2.5- 3FTR	2.5F x 2.5M x 3' cable	18	Black	1.95	1.75	1.59
2099139	ValuePro	DCEXTCORD2.5- 6FTR	2.5F x 2.5M x 6' cable	18	Black	2.49	2.25	1.95

Automobile Fused Power Plugs with Cords

- Accepts .25" x 1.25" fuse

115002: Screw assembly with strain relief (no cord)

124760: 3' cord w/ pigtail

Part No.	Fuse	1	10	100
115002	5A/250VACR	$2.25	$1.99	$1.79
124760	3A/250VACR	2.49	2.25	1.99

In-Car USB Charger/Adapter

- Input voltage: 12VDC to 24VDC
- Output voltage: 5VDC @ 600mA
- Output connector: USB type A
- LED indicator for power
- Overall length: 2"

Part No.	Cross Ref. No.	1	10	100
2158320	CC001-BLKR	$3.95	$3.59	2.95

R RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

DC Cords with Pigtail – 6' length

JAMECO ValuePro

• 24 AWG • Color: black

★Web Code: MFP

Part No.	Cross Ref. No.	Fig.	Description (Barrel) ID x OD x L (mm)	1	10	100
2113674	DCCORD1.3℞	1	Plug, 1.3 x 5.5 x 12	$1.15	$.99	$.89
2114706	6FT#245.5X1.7℞	1	Plug, 1.7 x 5.5 x 12	1.15	.99	.89
2114693	DCCORD1.7℞	2	Jack, 1.7 x 5.5 x 12	.95	.85	.75
2096763	DCCORD2.1℞	1	Plug, 2.1 x 5.5 x 12	1.59	1.39	1.15
2114600	6FT#245.5X2.1℞	2	Jack, 2.1 x 5.5 x 12	1.59	1.39	1.15
2096771	DCCORD2.5℞	1	Plug, 2.5 x 5.5 x 12	1.59	1.39	1.15
2114597	6FT#245.5X2.5℞	2	Jack, 2.5 x 5.5 x 12	1.59	1.39	1.15

Fig. 1

Fig. 2

We specialize in Wall Adapters. Call for additional OEM pricing.

We are happy to change any listed DC wall adapter power plug to a connector of your choice for just $2.50 each or $4.00 each molded A 100 pc. minimum order applies.

Wall Adapters on pages 2-6

International Step-Up & Step-Down Transformers

JAMECO ValuePro

★Web Code: RAL

Part No.	Cross Ref. No.	Fig.	Type	Volt Step	Primary Voltage	Secondary Voltage	Watts (VA)	Dimensions H"	W"	D"	Wt. (lbs.)	Pricing 1	5	25
221331	GIS-500℞	A	Isolation	—	115VAC	115VAC	500	4.69	3.75	6.00	16.0	$89.95	$79.95	$69.95
85008	GPC-1003R	A	Auto	Up	110VAC	220VAC	300	3.50	3.05	3.95	4.8	49.95	44.95	39.95
221217	P8689	A	Auto	Up	115VAC	230VAC	1000	4.63	3.75	6.13	17.0	89.95	79.95	69.95
85016	GPC1003	B	Auto	Down	220VAC	110VAC	300	3.50	3.05	3.95	4.8	49.95	44.95	39.95
111851	GPC1005	B	Auto	Down	220VAC	110VAC	500	3.99	3.60	4.84	8.5	69.95	62.95	56.95

Fig. A Plug

Fig. B Plug



Output Receptacle

Quick-Connect Power Transformers

JAMECO ValuePro

★Web Code: BAN

• Input voltage: 115/230VAC, 50-60Hz
• Terminals: quick-connect, solder



104387



Part No.	Product No.	Triad Cross*	Input Voltage	Output Voltage	Watts (VA)	Size of Connect	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	5	25
104387	XFR1225Q	FD612	115/230VAC	12.6VCT @ 2.5A	31.5	0.187"	1.75	2.33	2.00	1.3	$12.95	$11.95	$10.95
104409	XFR1635Q℞	FD716†	115/230VAC	16VCT @ 3.5A	56.0	0.141"	2.25	2.68	2.33	1.8	12.95	11.49	9.95
101864	XFR2424Q	FD724	115/230VAC	24VCT @ 2.4A	57.6	0.141"	2.10	2.70	2.29	1.7	10.95	9.49	8.95
104417	XFR3615Q℞	FD736	115/230VAC	36VCT @ 1.5A	54.0	0.141"	2.30	2.70	2.30	1.8	17.95	16.95	15.95

† Terminal solder lugs are on same side *Triad cross is for reference only

Power Transformers (7.6 Watts to 288 Watts)

JAMECO ValuePro

★Web Code: PTL

Power transformers have both single and dual-voltage input and center-tapped outputs. This makes them the perfect choice for power supply design or for use in transformer, rectifier and filter circuits.

• Primary: 115VAC or 115/230VAC, 50-60Hz

29226



115/230VAC 50-60Hz
Fig. 1



115VAC 50-60Hz
Fig. 2



115VAC 50-60Hz
Fig. 3

115/230VAC 50-60Hz
Fig. 4



Part No.	Product No.	Triad Cross#	Primary Color Code			Watts (VA)	Secondary Voltage	Secondary Color Code			Lead Type	Fig.	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
102163	XFR6102℞	F314X	Black	Yellow*	Red	7.6	6.3VCT @ 1.2A	White	Black*	White	Wire	1	1.84	2.40	1.67	0.8	$10.95	$9.95	$8.95
105524	XR082-91-R℞	—	Black	White*	Red	9.0	4.5VCT @ 1A	Blue	Black*	Blue	Wire	1	1.82	2.43	1.67	0.7	10.95	9.95	8.95
221400	P-8657℞	F218X	Black	—	Black	24.0	12VAC @ 2A	White	—	White	Wire	2	1.89	2.75	1.99	1.3	10.95	9.95	8.95
221356	P-8658	F219X	Black	—	Black	48.0	12VAC @ 4A	White	—	White	Wire	2	2.25	4.00	2.63	2.3	12.95	11.95	10.95
29226	XFR122℞	F44X	Yellow	—	Yellow	25.2	12.6VCT @ 2A	Blue	Red*	Black	Wire	3	2.41	2.79	1.99	1.5	13.95	12.49	10.95
102155	XFR1220℞	F344X	Black	Yellow*	Red	25.2	12.6VCT @ 2A	White	Black*	White	Wire	1	2.35	2.32	1.97	1.5	13.95	12.49	10.95
149771	XFR1240℞	F3181U	Black	Red*	Yellow	50.4	12.6VCT @ 4A	White	Black*	White	Wire	1	2.45	3.20	2.25	2.2	14.95	13.49	10.95
102121	XFR124℞	F181U	Black	—	Black	50.4	12.6VCT @ 4A	White	Black*	White	Wire	3	2.45	3.21	2.26	2.7	14.95	13.49	10.95
105532	XFR1810℞	—	Blue	Red*	Black	18.0	18VCT @ 1A	Yellow	Black*	Yellow	Wire	1	2.20	2.81	1.99	1.2	10.95	9.95	8.95
149957	XFR1820℞	—	Black	Red*	Yellow	36.0	18VCT @ 2A	White	Black*	White	Wire	1	2.25	3.15	2.71	1.8	12.95	11.95	10.95
112513	XFR242N℞	F229X	Black	—	Black	48.0	24VAC @ 2A	White	—	White	Wire	2	2.33	3.16	2.28	1.8	13.95	12.49	10.95
2162652	90-T50F3§	—	White	Black	Orange	50.0	24VAC @ 2.08A	Blue	—	Yellow	Wire	4	2.44	3.23	2.68	2.3	14.95	13.49	11.95
221382	P8396℞	—	Black	—	Black	9.6	24VCT @ 0.4A	White	Black*	White	Wire	3	1.63	2.80	1.97	0.6	9.95	8.95	7.95
102112	XFR2410℞	F346X	Black	Yellow*	Red	24.0	24VCT @ 1A	White	Black*	White	Wire	1	2.41	2.80	1.99	1.5	10.95	9.95	7.95
221373	P-8662℞	F192X	Black	—	Black	48.0	24VCT @ 2A	White	Black*	White	Wire	3	2.44	3.60	2.23	2.3	13.95	12.49	10.95
221365	P-8663℞†	F193U	—	—	—	96.0	24VCT @ 4A	—	—	—	Lug	3	2.81	2.94	4.00	4.0	25.95	23.95	21.49
99654	XFR242℞	—	Red	—	Red	49.2	24.6VCT @ 2A	Blue	Yellow*	Blue	Wire	3	2.44	3.22	2.30	2.5	12.95	11.49	9.95
102104	XFR2520℞	F341X	Black	White*	Red	50.4	25.2VCT @ 2A	Orange	Black*	Orange	Wire	1	2.45	3.22	2.26	2.8	12.95	11.49	9.95
149797	XFR2820℞	F3185U	Black	Red*	Yellow	56.0	28VCT @ 2A	White	Black*	White	Wire	1	2.45	3.22	2.26	2.3	13.95	12.49	9.95

* Center tap # Triad cross is for reference only § 3 input voltages † Solder terminal

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Split-Bobbin Power Transformers (2.5 to 12VA)

JAMECO ValuePro

Non-concentrically wound w/ primaries & secondaries side-by-side providing low capacitive coupling.

- Primary: 115/230VAC, 50-60Hz
- PC terminal pin spacing for accurate placement



★Web Code: LBK

Part No.	Cross Ref. No.	Triad Cross*	Input Voltage	Watts (VA)	Individual Output	Parallel Output	Series Output	Dimensions L"	W"	H"	Wt. (lbs.)	Pricing 1	10	100
221292	DSW-312	FS12200	115/230	2.5	6.3V @ .20A	6.3V @ .40A	12.6VCT @ .20A	1.38	1.13	1.19	0.3	$6.95	$6.25	$5.59
102593	XFR2405SB℞	FS24500	115/230	12	12V @ .50A	12V @ 1.0A	24VCT @ .50A	1.58	1.90	1.46	0.7	8.95	7.95	6.49
2183402	SPW-1304	—	115/230	20	12V @ .85A	12V @ 1.66A	24VCT @ .83A	1.88	2.25	1.57	1.0	10.95	9.95	8.95

* Triad cross is for reference only

PC Mount Modem Coupling Transformer

JAMECO ValuePro

- Core type: EI-14
- Insulation resistance: 100MΩ
- ±20% impedance matching and DC resistance matching
- Hipot tested: 1000VAC • Vacuum wax impregnated

Part No.	Cross Ref. No.	Impedance (Ω) Primary	Secondary	Resistance (Ω) Primary	Secondary	Pricing 1	10	100
125357	XFR6006A14℞	600CT	600CT	65	55	$3.49	$2.95	$2.75

Low Frequency Current Sensing Transformer

TRIAD

May be used to monitor current 0.1-30A @ frequencies 50-400Hz.

- Turns ratio: 1:500 • Typical output: 110mV/amp
- Hi-pot: 500V • Burden resistor: 60Ω

Part No.	Mfr. Part No.	Sen DCR	Primary DCR	1	10	100
627591	CSE187L	21Ω max.	250μΩ max.	$4.49	$3.95	$3.59

5-Position Low Voltage Distribution Block

- Dual (neg./pos.) input terminals on each end for parallel "add-on" capability
- Negative and positive bus bar for efficient power distribution
- Up to 20 amps per fuse / 75 amps per block
- Uses standard ATC/ATO automotive fuses (not included)

NEW MARKED IN PINK



Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	5	25
2179631	DB-5℞	3.5" x 2.5" x 1.5"	$35.95	$33.95	$31.95

PC Mount Audio Transformer

TRIAD

- Impedance matching: 10% over frequency range
- 6-pin PC mount • Output: 100mW
- Impedance (Ω): 600CT/600CT
- Primary DC Unbalance: 15mA



Part No.	Mfr. Part No.	Dimensions (W x D x H)	1	10	100
630459	TY-145P℞	13/16" x 9/32" x 5/8"	$4.49	$3.95	$3.49

★Audio Transformers — Enter Web Code SAJ

Current Sensing Transformer

JAMECO ValuePro

- Frequency range: 10-50 kHz
- Inductance: 5mH • Turns: 60
- Sensitivity current (I_{in}): 1A • Sensitivity voltage (V_{out}): 1V
- Terminating resistor: 50Ω • Max. current: 300mA

Part No.	Cross Ref. No.	Dimensions (W x D x H)	1	10	100
164718	MTC30101	0.7" x 0.46" x 0.8"	$3.49	$2.95	$2.59

Class 1 Current Transformer

JAMECO ValuePro

- Maximum voltage: 660VAC
- Frequency: 50-60Hz • Ratio: 200A/5A; 5VA
- Weight: 1.1 lbs. • Power: 5VA

Part No.	Cross Ref. No.	Dimensions (W x D x H)	1	5	25
174887	MSQ30	2.95" x 1.7" x 3.36"	$7.95	$6.95	$5.95

500 to 2000VA Variable Transformers

JAMECO ValuePro

- Input: 110VAC or 220VAC
- Power: 500, 1000 or 2000VA
- Output: 0-240VAC
- Banana/screw input terminals
- Universal US/European output plugs
- Lighted on/off power switch

121276

Part No.	Fuse	Size (W" x D" x H")	Wt. (lbs.)
121276	3A/250V (P/N 69439)	5.3 x 7.3 x 7.0	10.4
129008	5A/250V	9.4 x 6.5 x 7.7	14.8
152582	10A/250V (P/N 69462)	9.0 x 7.0 x 7.7	19.8

Part No.	Description	1	5
121276	500VA transformer℞	$139.95	$129.95
129008	1000VA transformer℞	169.95	154.95
152582	2000VA transformer℞	224.95	199.95

320VA Variable AC Transformer

JAMECO ValuePro

- Input voltage: 110VAC @ 50-60Hz
- Matching input/output terminals: P/N 103668 & 109112 (disconnect .25" solderless terminals, see web)
- Maximum current: 2.5A
- Shaft length: 0.5"
- Size: 2.8"Dia. x 2.1"H • Panel mount
- Weight: 2.5 lbs. • One-year warranty

Includes: 3 disconnect .25" solderless terminals

Part No.	Cross Ref. No.	1	5	25
149324	PSV-203-R℞	$59.95	$53.95	$47.95

★Variable Transformers — Enter Web Code MAR

300VA Isolation Transformer 120VAC to 120VAC

JAMECO ValuePro

- Input connector: 5.5' cord with 2-prong plug
- Output voltage: 120VAC @ 2.5A (isolated)
- Input voltage: 120VAC @ 60Hz
- Size: 3.2"W x 4.6"D x 4.2"H • Weight: 7.0 lbs.

Part No.	Cross Ref. No.	1	5	25
181315	ITR300	$49.95	$44.95	$39.95

International Step-Up/ Step-Down Autotransformer

- Input volt.: 110/200/220/240V
- Output voltage: 110/220V
- Power: 80 watts continuous/ 100 watts intermittent
- On/off switch • Fuse protected
- Two free spare fuses • CE certification
- European to US adapter on power cable
- Universal European/US output receptacles
- Dimension: 5.2"L x 3.7"W x 3.5"H

Part No.	Mfr. Part No.	1	5	25
2082599	VC-100	$13.95	$12.95	$11.95

6kV-7.4kV High Voltage Power Supply

- Input voltage range: 113VAC to 132VAC
- Input lead wires: 22 AWG UL1015, 7.5"L; AC hot (black), AC COM (white), HV RTN (green) • Output voltage: 6.0kV to 7.4kVA@ 120VAC
- Output lead wires: 22 AWG UL3239, 10" (pink)
- UL94V-0 rated encapsulant filled epoxy • Size: 3.0"L x 1.2"W x 1.0"H

MADE IN USA



Part No.	Mfr. Part No.	Description	1	10	50	100
2100136	CS2080A3	High voltage power supply	$5.95	$4.95	$3.95	$2.95

EMI Suppression Cores with Case

Reduce Electromagnetic Interference (EMI) with a snap of these suppression cores around a power cord or data cord. Easy to install and an affordable way to reduce EMI without redesigning your product.

218174

1952901

- Impedance at 100MHz between 75-225Ω min.
- Color: black

Round

JAMECO ValuePro

Part No.	InDia.	OutDia.	Length	1	10	100
218174℞	.20"	.64"	1.15"	$1.25	$.99	$.75
217842℞	.34"	.78"	1.40"	1.49	1.25	.99
2081810	.38"	1.0"	0.65"	.79	.69	.59

Square

Laird

Part No.	InDia.	Width	Height	Length	1	10	100
2094987℞	.20"	.55"	.59"	1.40"	$.99	$.85	$.75
1952901	.25"	.70"	.77"	1.30"	.79	.69	.59
1536958℞	.40"	.87"	.87"	1.27"	1.09	.99	.89

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

EMI Power Entry Filters (IEC Connector), Line Filters & AC Receptacles (IEC 320)

Fig. 1 (Faston)

Fig. 2 (Wire)



Fig. 3 (Right Angle)

Fig. 4 (Faston)

Fig. 5

Fig. 6

Fig. 7

Fig. 8



Fig. 9 (6-32 Panel Mount)



Fig. 10



Fig. 11

Fig. 12

Fig. 13

Fig. 14



Fig. 15



Fig. 16

- Rated voltage: 115/250VAC • Operating frequency: 50/60Hz
- Hipot rating (one minute) line to ground: 2250VDC; line to line: 1450VDC

EMI Power Entry Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.20mA @ 250VAC 50Hz: 0.40mA

EMI Line Filter: Maximum leakage current each line to ground: @ 115VAC 60Hz: 0.25mA; 1.0mA (10000pF) @ 250VAC 50Hz: 0.45mA; 2.0mA (10000pF)

★Web Code: ACR

Fig. 17

Fig. 18



Fig. 19



Fig. 20

Part No.	Mfr.	Product No.	Description	Fig.	Current (A)	Hipot (VDC)	Terminals	Terminal Size	Agency Approvals	Dimension (in.) A	B	C	D	Pricing 1	10	100
1951511	Delta†	01GEEG3E (1ED1)	Power entry filter, straight (screw flanged)	1	1	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	$2.49	$2.25	$1.95
210913	Delta†	01GEEW3E (1ED8)	Power entry filter, straight (screw flanged)	2	1	2250	4" Wires	Wire	UL/CSA/VDE	1.89	1.19	0.86	1.58	1.49	1.25	.99
1951529	Delta	01DEEG3V	Power entry filter, rt. angle (screw flanged)	3	1	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	.89	.79	.69
1172613	Tyco	1EGG1-2ℛ	Pwr entry filter, straight, fused (screw flanged)	4	1	2250	Faston	0.25"	UL/CSA/VDE	1.62	1.29	1.44	1.27	.89	.79	.69
1172672	Corcom	IVB3ℛ	Line filter (flange mount)	5	10	2250	1.5" Wire	Wire	UL/CSA/VDE	0.96	1.82	0.66	2.53	7.95	6.95	5.95
2133683	Schaffner	FN291E-2.5-05	Power entry filter, straight (screw flanged)	6	2.5	1700	Faston	0.25"	—	1.26	2.80	1.10	2.35	2.95	2.59	2.25
107326	Delta	03DEEG3B-Rℛ	Power entry filter, straight (screw flanged)	1	3	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	4.95	4.49	3.95
2178523	Schurter	5110.0343.1	Power entry filter, straight (snap-in)	7	3	2250	Faston	0.25"	UL/CUL	1.42	0.91	1.19	0.80	3.95	3.59	3.19
667438	ValuePro	YB03A1 (3EF1F)	Power entry filter, straight (screw flanged)	1	3	2250	Faston	0.25"	UL/CSA/VDE	2.23	1.19	0.89	1.58	4.95	4.49	3.95
1951537	Delta†	03GEEW3E-R (3ED8)	Power entry filter, wire (screw flanged)	2	3	2250	4" Wire	Wire	UL/CSA/VDE	1.90	1.19	0.87	1.58	1.49	1.35	1.19
2114116	Adam Tech	PLF-3PCℛ	Line filter, metal case (PC mount)	8	3	250	Solder	0.039"	UL/CSA/VDE	0.984	0.984	0.787	—	5.95	5.39	4.79
1954720	Delta	04BEEG3S	Power entry filter, straight, fused (screw flanged)	1	4	2250	Faston	0.25"	UL/CSA/VDE	2.26	1.19	1.26	1.40	1.29	1.09	.79
1951570	Delta†	05DRDG3S (5ER7)	Power entry filter, 6-32 threaded panel mount	9	5	2250	Faston	0.25"	UL/CSA/VDE	3.15	1.97	1.28	1.58	1.95	1.79	1.59
2114124	Adam Tech	PLF-6DZ2KRℛ	Pwr entry filter, strght, fuse & sw. (scrw flngd)	10	6	250	Faston	0.25"	UL/CSA/VDE	1.968	2.559	2.394	1.154	9.95	8.95	7.95
1951588	Delta	06DEEG3V	Power entry filter, right angle (screw flanged)	3	6	2250	Faston	0.25"	UL/CSA/VDE	1.64	1.19	0.87	1.58	1.95	1.79	1.49
1951596	Delta	10GEEG3C†	Power entry filter, straight (screw flanged)	1	10	2250	Faston	0.25"	UL/CSA/VDE	2.20	1.19	0.87	1.58	2.95	2.59	2.25
1951609	Delta	10ME3(S)	Power entry filter, right angle (PC mount)	3	10	2250	Solder	0.16"	UL/CSA/VDE	1.64	1.19	0.87	1.58	1.95	1.79	1.49
1951617	Delta	15DEEG3HA(D)	Power entry filter, straight (screw flanged)	1	15	2250	Faston	0.25"	UL/CSA/VDE	2.42	1.19	0.87	1.58	3.95	3.59	3.19
2114095	Adam Tech	NEMA-5-2ℛ *	AC power outlet, NEMA receptacles (snap-in)	11	15	125	Fork	0.25"	UL/CSA/VDE	1.063	1.063	0.70	0.866	.99	.85	.69
147901	ValuePro	701Rℛ	AC power inlet, male (screw flanged)	12	15	250	Faston	0.187"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
16652	ValuePro	JR101ℛ	AC power inlet, male (screw flanged)	12	15	250	Faston	0.25"	UL/CSA/VDE	1.97	0.76	1.06	1.58	1.09	.99	.79
2133712	Schurter	VSP1.8101.1	AC pwr inlet, M R/A (screw flanged, PC mount)	13	15	250	Solder	0.05"	UL/CSA/VDE	1.96	1.09	1.09	0.78	.49	.45	.39
2114010	Adam Tech	IEC-A-4ℛ	AC pwr inlet, M R/A (screw flanged, PC mount)	13	15	250	Solder	0.071"	UL/CSA/VDE	1.97	0.89	1.06	0.76	.39	.29	.19
2178494	ValuePro	EAC-324	AC power inlet, male, straight (screw flanged)	14	15	250	Solder	0.16"	UL/CSA/VDE	1.96	0.89	1.09	1.09	.69	.59	.49
2178507	ValuePro	6100-4115	AC power inlet, male (snap-in)	15	10	250	Solder	0.14"	UL/CSA/VDE	1.19	0.91	1.06	0.77	.69	.59	.49
2178515	ValuePro	EAC-409	AC power inlet, male (snap-in)	15	15	250	Solder	0.16"	UL/CSA/VDE	1.22	0.94	1.06	0.78	.79	.69	.59
147109	ValuePro	42R02	AC power inlet, male (snap-in)	16	15	250	Faston	0.25"	UL/CSA/VDE	1.23	0.95	1.04	0.77	1.09	.99	.79
2095525	ValuePro	IEC-GS-1-100#	AC pwr inlet, male w/ sw. & fuse folder (snap-in)	15	15	250	Faston	0.187"	UL/CSA/VDE	1.20	1.97	0.77	1.83	2.49	2.25	1.95
117445	ValuePro	0717ℛ#	AC power inlet, male w/ fuse chamber (snap-in)	17	10	250	Faston	0.187"	UL/CSA/VDE	1.18	1.30	1.05	1.20	1.95	1.79	1.59
265528	ValuePro	WS-044ℛ#	AC power inlet, male w/ fuse chamber (screw)	18	10	250	Faston	0.187"	UL/CSA/VDE	1.40	1.28	1.06	1.21	1.75	1.49	1.25
1954640	ValuePro	K2415	AC power inlet, female (snap-in)	19	15	250	Faston	0.187"	UL/CSA/VDE	1.38	0.98	1.26	1.10	.59	.49	.45
1954658	ValuePro	K2414	AC power inlet, female (screw flanged)	20	15	250	Faston	0.187"	UL/CSA/VDE	1.97	1.14	1.26	0.95	1.75	1.49	1.25

† High Performance; Increased filtering; Added bleeded resistor; More safety agencies * For 14-16 AWG wire # Includes spare fuse holder – fuse type 5mm x 20mm (250V)

International Power Cords

- 3-conductor detachable power cords
- Excellent resistance to jacket abrasion
- Cord color: black; except P/N 172195: grey
- BSI: British Standard Institution
- Cord type: H05VVF
- Voltage rating: 300V

Part No.	Cross Ref. No.	Country	Agency Approvals	Plug Fig.	Cord Length	Conductors	Pricing 1	10	100
117911	2171H576ℛ	Europe	All	1/A	6 ft.	3/0.75mm	$4.95	$4.49	$3.95
2081916	P06B-Gℛ	Europe	All	2/A	6 ft.	3/0.75mm	4.95	4.49	3.95
174633	21071H5182ℛ	UK/Ireland	BSI	3/A	8 ft.	3/1.0mm	6.95	6.25	5.59
172195	8120-6979ℛ	Italy	All	4	6 ft.	3/1.0mm	.99	.89	.79

Fig. 1 (Straight)

Fig. 2 (Right angle)

Fig. 3 (Right Angle, Fused)

Fig. 4


Fig. A

★Web Code: XAQ

European Agency Approvals

Germany	VDE		France	LCIE	
Austria	OVE		Netherlands	KEMA	
Belgium	CEBEC		Norway	NEMKO	
Denmark	DEMKO		Sweden	SEMKO	
Finland	FIMKO		Switzerland	SEV	

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

3 LEVELS OF SAVINGS: NAME BRANDS | HOUSE BRANDS | SPECIAL BUY

Line Cord w/ Pigtail (Fig. 1) w/ Strain Relief (Fig. 1A)



Laptop Power Cord (Fig. 2)



AC Plug Fan Power Cord (Fig. 3)

Power Cord w/ Pigtail (Fig. 4)

Detachable Power Cord (Fig. 5)

Computer Power Supply Extension Cord (Fig. 6)



Straight or Right Angle w/ Pigtail (Fig. 7)



Right Angle Detachable Power Cord (Fig. 8)

Hospital Grade Power Cord (Fig. 9)

Computer Monitor Power Adapter Cord (Fig. 10)

Detachable Power Strip Saver (Fig. 11)


Example (Fig. 11)



Power Strip Saver II (Fig. 12) Example (Fig. 12)



4' Overall Length "Y" Twin End (Fig. 13)

Mickey Mouse™ Style Power Cord (Fig. 14)

Plug Detail – Industry Standard Designations


290B

910

386A/386E


150

JAMECO ValuePro

2 & 3-Conductor Fan, Pigtail, Detachable & Hospital Grade Power Cords

- Molded connectors
- Excellent resistance to jacket abrasion
- Voltage rating: 300 volts
- Temperature: -20°C to +60°C

*Web Code: UBF

AWG	Volts	Amps	VA
18	125	10	1250
16	125	12	1500
14	125	15	1875

2-Conductor Line Cords with Pigtail

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG/ Cond	Cord Type*	Pricing 1	10	50	250
2120188	444010-4	JVP	.15	1A	4'	Black	18/2	SPT-2	$1.95	$1.75	$1.49	$1.25
152187	17106BG℞	JVP	.20	1	6'	Beige	18/2	SPT-2	1.95	1.75	1.49	1.25
124434	ST008℞	JVP	.16	1	6'	Black	18/2	SPT-2	2.49	2.25	1.95	1.75
42042	SY-001-R℞	JVP	.18	1A	6'	Black	18/2	SPT-2	2.95	2.75	2.49	2.25

2-Conductor "8" Style Power Cords for Laptops and Power Supplies

2151195	123855-1℞	JVP	.15	2A	3'	Black	18/2	SPT-2	$1.49	$1.35	$1.19	$1.09
355944	VW-1G	JVP	.30	2A	6'	Gray	18/2	SPT-2	1.95	1.75	1.49	1.25
189587	VW-1℞	JVP	.30	2A	6'	Black	18/2	SPT-2	2.95	2.69	2.39	2.19

2-Conductor "D" Style Power Cord for Laptops and Power Supplies

200791	LL114039	JVP	.30	2B	6'	Black	18/2	SPT-2	$1.95	$1.75	$1.49	$1.25

2-Conductor AC Plug Fan Power Cords

1952572	FACS℞	JVP	.40	3A	6'	Black	18/2	SPT-2	$3.95	$3.59	$3.19	$2.49
1952581	FAC45℞	JVP	.40	3B	6'	Black	18/2	SPT-2	4.95	4.59	3.95	3.49

3-Conductor Power Cords with Pigtail (Unshielded) 290 Plug

38009	17237℞	JVP	.31	4	6'	Gray	18/3	SVT	$3.79	$3.39	$2.95	$2.79
2158258	17236SR℞#	JVP	.35	4	6'	Black	18/3	SVT	3.49	3.09	2.75	2.49
37997	17236℞	JVP	.30	4	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
173810	17405℞	JVP	.14	4	6'	Gray	18/3	SJT	4.95	4.49	3.95	3.59
159410	17405B℞	JVP	.37	4	6'	Black	18/3	SJT	4.95	4.49	3.95	3.59
38025	17238℞	JVP	.42	4	8'	Black	18/3	SVT	5.95	5.49	4.95	4.49
102007	17535B℞†	JVP	.49	4	10'	Black	18/3	SVT	5.95	5.49	4.95	4.49
196286	LL40378℞	JVP	.80	4	10'	Black	16/3	SJT	7.95	6.95	5.95	4.95
166925	17516℞	JVP	.41	4	6'7"	Black	14/3	SJT	9.95	8.95	7.95	6.95
100272	17629B℞	JVP	.88	4	9'	Black	14/3	SJT	9.95	8.95	7.95	6.95

3-Conductor Detachable Power Cords (Unshielded) 290B/386A Plugs

2081801	17002A℞	JVP	.36	5	1'	Black	18/3	SVT	$2.95	$2.65	$2.39	$1.95
2172834	LL11094B	JVP	.16	5	2'	Black	18/3	SVT	2.75	2.49	2.19	1.75
2082425	17000A	JVP	.35	5	3'	Black	18/3	SVT	3.25	2.95	2.59	2.29
38041	17249℞	JVP	.37	5	6'	Beige	18/3	SVT	3.49	2.95	2.49	1.95
38050	17250℞	JVP	.36	5	6'	Black	18/3	SVT	4.95	4.49	3.95	3.59
132118	17500℞	JVP	.44	5	6'	Black	18/3	SJT	4.95	4.49	3.95	3.25
2100275	17251B	JVP	.37	5	7'7"	Black	18/3	SVT	3.49	2.95	2.75	2.49
1585637	171096	JVP	.60	5	8'	Black	18/3	SVT	4.95	4.49	3.95	3.59
102024	17501V℞	JVP	.55	5	10'	Black	18/3	SVT	5.95	5.69	5.39	4.95
163361	6952299	JVP	.75	5	14'	Black	18/3	SJT	7.95	6.95	6.25	5.59
2145051	177323	JVP	.70	5	15'	Black	18/3	SVT	5.95	4.95	4.49	3.95
340291	17001A℞	JVP	.31	5	3'	Black	16/3	SJT	4.95	4.59	3.95	3.49
2126053	LL76932§	JVP	.52	5	6'	Black	16/3	SJT	3.95	2.95	2.49	1.95
159361	17602	JVP	.52	5	6'	Black	16/3	SJT	6.95	5.95	5.35	4.79
1537230	LL34877	JVP	.72	5	8'	Black	16/3	SJT	7.95	6.95	6.25	5.59
125541	17504℞	JVP	.72	5	6'7"	Black	14/3	SJT	7.95	7.19	6.49	5.79
2172981	1181924	JVP	.95	5	10'	Black	14/3	SJT	9.95	8.95	7.95	6.95

#.55" x .62" strain relief †European standard insulation color code §RFI filter on cord

3-Conductor Detachable Power Cords (Shielded) 290B/386A Plugs

Part No.	Product No.	*Mfr.	Wt.	Fig.	Length	Color	AWG/ Cond	Cord Type*	Pricing 1	10	50	250
213874	17660BG	JVP	.40	5	6'	Beige	18/3	SVT	$4.25	$3.79	$3.49	$2.95
161761	17742	SLA	.40	5	6'	Black	18/3	SVT	4.49	3.95	3.59	2.95

3-Conductor Computer Power Supply Extension Cords (150/386A/910 Plugs)

2125317	LL90989	JVP	.15	6B	1'6"	Black	18/3	SVT	$1.59	$1.35	$1.19	$.95
206172	PEC-3℞	JVP	.22	6A	3'	Black	18/3	SVT	2.49	1.95	1.75	1.49
319804	LR94903	JVP	.82	6A	6'	Gray	18/3	SVT	1.95	1.75	1.49	1.09
28468	PEC	JVP	.36	6A	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2133595	PEC-SJT	JVP	.36	6A	6'	Black	18/3	SJT	4.95	4.49	3.95	3.49
420224	10W1-02212	JVP	.53	6A	12'	Black	18/3	SVT	5.95	5.39	4.79	4.25

3-Conductor Power Cords with Pigtail (Unshielded) 910 or 386 Plug

340056	17537℞	JVP	.37	7A	9'10"	Black	18/3	SJT	$2.25	$1.95	$1.75	$1.49
340099	17539℞	JVP	.80	7A	9'10"	Black	16/3	SJT	2.25	1.95	1.75	1.49
340072	17521℞	JVP	.80	7B	9'10"	Black	16/3	SJT	2.25	1.95	1.75	1.49

3-Conductor Power Cord with Pigtail (Shielded) 910 Plug

339995	72WV866SSDI℞	JVP	.49	7A	6'7"	Black	18/3	SVT	$1.95	$1.75	$1.49	$1.35

3-Conductor Right Angle Detachable Power Cords (Unshielded) 290B/910 Plugs

117357	8120-6177℞	JVP	.41	8B	6'	Gray	18/3	SVT	$3.95	$3.55	$3.19	$2.79
38077	17250R℞	JVP	.54	8B	6'	Black	18/3	SVT	3.95	3.55	3.19	2.79
2099999	E88265	JVP	.82	8A	8'	Black	18/3	SVT	1.95	1.75	1.49	1.09
177384	17507℞	JVP	.28	8B	10'	Black	18/3	SVT	4.95	4.49	3.95	3.49
2121519	17569R	JVP	.30	8B	10'	Black	18/3	SJT	3.95	3.59	3.25	2.95

3-Conductor Right Angle Detachable Power Cord (Shielded) 290B/910 Plugs

173252	17745℞	JVP	.16	8B	6'7"	Black	18/3	SVT	$5.95	$5.39	$4.79	$4.25

3-Conductor Hospital Grade Power Cords (green dot)

2115434	LL39965	JVP	.75	9	10'	Gray	18/3	SJT	$5.95	$5.25	$4.59	$3.95
132011	17006G℞	JVP	.82	9	10'	Gray	16/3	SJT	10.95	9.95	8.95	7.95

3-Conductor Computer Monitor Power Adapter Cord (150/386 Plugs)

177448	MPC1℞	JVP	.16	10	1'	Black	18/3	SVT	$2.95	$2.69	$2.39	$2.19

3-Conductor Detachable Power Cords (Power Strip Saver) 290B/386 Plugs

208339	P55-BR℞	JVP	.16	11	1'	Beige	18/3	SVT	$2.95	$2.69	$2.39	$2.15
199778	PSS-1℞	JVP	.16	11	1'	Black	18/3	SVT	2.95	2.69	2.39	2.15

3-Conductor Power Cord ("Y" Type Power Strip Saver II) 290B/386 (2) Plugs

208347	121-2594℞	ZTK	.38	12	22"	Black	16/3	SJT	$8.95	$7.95	$6.95	$6.49

3-Conductor Power Cord ("Y" Twin End) 150/386 (2) Plugs

340566	17268A℞	JVP	.32	13	4'	Black	18/3	SJT	$6.95	$6.25	$5.59	$4.95

3-Conductor "Mickey Mouse" Style Power Supply Cords

1953559	MMFLAT	MWL	.40	14	6'	Black	18/3	SPT-2	$2.95	$2.59	$2.29	$1.95
1951123	MMPC℞	MWL	.40	14	6'	Black	18/3	SVT	3.49	2.95	2.49	2.19

*Thermoplastic Cord Jacket Type: **SPT-2 (Flat):** Junior duty; **SVT (Round):** Light service; **SJT (Round):** Junior service

*JVP = Jameco ValuePro | MWL = Mean Well | SLA = Sola | ZTK = Ziotek

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Open-Frame Switching AC-to-DC Power Supplies

★Web Code: OSP

- Universal AC input/full range • Two-year warranty
- Short-circuit, overload and overvoltage protection

PFC Model Additional Features:

- Built-in active Power Factor Correction function, power factor >0.93 • Three-year warranty

Complete specifications available online

PS-25

PPS-125

LPP-150

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Size (L"xW"xH")	Mounting Holes (L"xW"xDia.")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 5
Single Output														
229042	Phihong	PSA15LN3-050	+5V @ 0-3A	15W	90-264 @ 47-63	4.3x1.6x0.9	4.0x1.3x0.2	50	2.0	1.0	—	UL/CUL/TUV/CE	$18.95	$17.25
2081836	CUI Inc.	VOF-25-5	+5V @ 4.4A	25W	85-264 @ 47-63	3.5x2.0x0.9	3.2X1.7X0.2	50	5.0	5.0	—	UL/CUL/TUV/CE/FCC	9.95	8.95
212354	Mean Well	PS-25-5	+5V @ 0-5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	80	2.0	0.5	—	UL/CUL/TUV/CE	11.95	10.95
217332	Mean Well	PS-45-5	+5V @ 0-8A	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	3.0	1.0	—	UL/CUL/TUV/CE	13.95	12.49
392826	Mean Well	PS-25-7.5	+7.5V @ 3.3A	24.8W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.14	80	2.0	0.5	—	UL/TUV/EN	11.95	10.95
148604	Mean Well	PS-25-12	+12V @ 0-2.1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	—	UL/CUL/TUV/CE	11.95	10.95
213728	Mean Well	PS-45-12	+12V @ 0-3.7A	44.4W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	13.95	12.49
148639	Mean Well	PS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.15	100	2.0	1.0	—	UL/CUL/TUV/CE	14.95	13.49
2099981	ITE	SBU60-105	+12V @ 5.25A	63W	90-264 @ 47-63	5.0x3.0x1.1	4.6x2.6x0.15	120	3.0	0.5	—	UL/CUL/CE	8.95	7.95
374089	Mean Well	PPS-125-12	+12V @ 0-8.5A	126W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.14	100	1.0	0.5	✔	UL/CUL/TUV/CE	48.95	43.95
213681	Mean Well	LPP-150-12	+12V @ 0-12.5A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.15	100	1.0	0.5	✔	UL/CUL/TUV/CE	39.95	36.95
374380	Mean Well	PS-65-13.5	+13.5V @ 0-5.4A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.16	100	2.0	1.0	—	UL/CUL/TUV/CE/CB	14.95	13.49
2105674	Mean Well	PS-15-15	+15V @ 0-1A	15W	85-264 @ 47-63	3.7x1.9x1.0	3.4x1.6x1.0	120	1.0	1.0	—	UL/TUV/CB/CE	7.95	7.25
216769	Mean Well	PS-25-15	+15V @ 0-1.7A	25.5W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	100	2.0	0.3	—	UL/CUL/TUV/CE	11.95	10.95
374353	Mean Well	PS-45-15	+15V @ 0-3.5A	45W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.1	100	2.0	1.0	—	UL/CUL/TUV/CE	14.95	13.95
216751	Mean Well	PS-65-15	+15V @ 0-4.2A	63W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	14.95	13.49
216670	Mean Well	LPP-100-15	+15V @6.7A	100W	85-264 @ 47-63	8.7x2.4x1.3	8.3x2.0x0.14	100	0.5	0.5	✔	UL/CUL/TUV/CE	37.95	33.95
668721	Mean Well	PPS-200-15	+15V @ 0-10A	150W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	100	1.0	0.5	✔	UL/CUL/TUV/CE	68.95	61.95
212346	Mean Well	PS-25-24	+24V @ 0-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	—	UL/CUL/TUV/CE	11.95	10.95
1919035	Mean Well	PS-35-24	+24V @ 0-1.5A	36W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	240	2.0	0.2	—	UL/CUL/TUV/CE	14.95	13.49
213720	Mean Well	PS-45-24	+24V @ 0-1.9A	45.6W	90-264 @ 47-440	4.0x2.0x0.9	3.8x1.8x0.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	13.95	12.49
148647	Mean Well	PS-65-24	+24V @ 0-2.7A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	100	2.0	1.0	—	UL/CUL/TUV/CE	14.95	13.49
2129633	Elpac**	MS6524F	+24V @ 2.7A	65W	100-240 @ 50-60	5.0x3.0x1.2	4.5x2.5x0.2	100	5.0	5.0	—	UL/CSA/TUV/CE	6.95	5.95
244727	Mean Well	LPS-75-24	+24V @ 0-3.5A	76.8W	90-264 @ 47-63	8.7x2.2x1.2	8.4x1.8x0.2	120	1.0	1.0	✔	UL/CUL/TUV/CE	18.95	17.49
173463	Mean Well	LPS-100-24	+24V @ 0-4.2A	100.8W	88-264 @ 47-63	8.7x2.4x1.3	8.4x2.1x0.1	150	0.5	0.5	✔	UL/CUL/TUV/CE	32.95	29.95
2129684	Elpac**	MSM7524	+24V @ 4.6A	110.0W	100-240 @ 50-60	5.7x3.4x1.6	5.2x3.4x1.5	240	3.0	1.0	—	UL/CUL/CE	15.95	13.95
301429	Mean Well	PPS-125-24	+24V @ 0-5.2A	124.8W	90-264 @ 47-63	5.0x3.0x1.4	4.6x2.6x0.1	150	1.0	0.5	✔	UL/CUL/TUV/CE	48.95	43.95
213672	Mean Well	LPP-150-24	+24V @ 0-6.3A	150W	85-264 @ 47-63	8.7x2.4x1.6	8.3x2.6x0.2	150	0.5	0.5	✔	UL/CUL/TUV/CE	39.95	36.95
668730	Mean Well	PPS-200-24	+24V @ 0-8.3A	199.2W	90-264 @ 47-63	5.0x3.0x1.4	3.7x7.8x0.14	150	1.0	0.5	✔	UL/CUL/TUV/CE	68.95	61.95
201954	Mean Well	PS-65-48	+48V @ 0-1.5A	64.8W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.16	100	2.0	1.0	—	UL/CUL/TUV/CE/CB	14.95	13.49
Double Output														
212312	Mean Well	PD-2505	+5V @ 0.1-3A; -5V @ 0.1-2.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50	4.0	1.0	—	UL/CUL/TUV/CE	$13.95	$12.49
212338	Mean Well	PD-25A	+5V @ 0.2-2.5A; +12V @ 0.1-1.5A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.08x0.1	50	1.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
212330	Mean Well	PD-25B	+5V @0.2-2A; +24V @ 0.1-1A	25.2W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	1.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
194862	Mean Well	PD-45A	+5V @ 0.4-3.2A; +12V @ 0.2-2	40W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	14.95	13.49
194889	Mean Well	PD-65A	+5V @ 0.4-7A; +12V @ 0.2-3.2A	61.1W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95
692377	Autec	UPS65-1002	+5V @ 0.5-3.5A; +12V @ 0.1-4A	65W	90-260 @ 47-63	6.0x3.5x1.5	4.8x3.2x0.2	50	2.0	0.5	—	UL/CSA/TUV	15.95	13.95
194897	Mean Well	PD-65B	+5V @ 0.4-3.5A; +24V @ 0.2-2A	65.5W	90-264 @ 47-440	5.0x3.0x1.7	4.5x2.5x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95
148690	Mean Well	PD-2512	+12V @ 0.1-1.2A; -12V @ 0.1-1A	24W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
2100857	Mean Well	PD-25-15	+15V @ 1A, -5V @ 1A	25W	85-264 @ 47-63	4.2x2.4x1.1	3.7x2.1x0.1	50	3.0	0.5	—	UL/CUL/TUV/CE	13.95	12.49
Triple Output														
2081617	Artesyn	NFN40-7607	+5V @ 3A; +12V @ 2A; -5V @ 0.35A	40W	85-264 @ 47-440	5.0x3.0x1.2	4.6x2.6x0.15	50	2.0	1.0	—	UL/CSA/TUV	$8.95	$7.95
2129676	Elpac**	MSM40D	+5.1V @ 4A; +24V @ 1A; -12V @ 0.4A	40W	100-240 @ 50-60	5.0x3.0x1.1	4.6x2.5x0.2	50	5.0	5.0	—	UL/CUL/CSA/CE	12.95	10.95
229122	Phihong	PSA4531	+5V @ 0-4A; +12V @ 0-1.5A; -12V @ 0-0.5A	44W	90-264 @ 47-63	5.0x3.0x1.2	4.6x2.6x0.2	50	2.0	1.0	—	UL/CSA/TUV/CE	33.95	31.49
88402	Mean Well	PT-45B	+5V @ 0.4-3A; +12V @ 0.2-2A; -12V @ 0-0.3A	45W	90-264 @ 47-440	5.0x3.0x1.1	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	16.95	14.95
216734	Mean Well	PT-65B	+5V @ 0.4-5.5A; +12V @ 0.2-2.5A -12V @ 0-0.5A	63.5W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	17.95	16.49
216726	Mean Well	PT-65C	+5V @ 0.4-5.5A; +15V @ 0.2-2A; -15V @ 0-0.5A	65W	90-264 @ 47-440	5.0x3.0x1.7	4.6x2.6x0.2	50	3.0	1.0	—	UL/CUL/TUV/CE	17.95	16.49

* Primary Output ** Medical rated

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Open-Frame Medical Switching AC-to-DC Power Supplies

MPS-65

- Universal AC input/full range
- 100% full-load burn-in test
- Soft-start circuit, limiting AC surge current
- Short-circuit, overload and overvoltage protection
- Load regulation: ±2.0%
- Line regulation: ±1.0%
- Voltage adjustment: 10%
- Inrush current: 20A @ 120VAC
- 2129633/2129676: ±5% load/line regulation
- Leakage current: 0.3mA @ 240V
- Isolation voltage: 4000VAC
- 2.9 watts/in³ max.
- Working temp.: -10˚C to + 60˚C
- Mating connector: P/N 104732 (see web)
- 2129684: ±1% line, ±3% load regulation

Performance at Value Prices

★Web Code: JBK

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Input (VAC @ Hz)	Ripple & Noise (mV p-p)*	Certification	Pricing: 1	Pricing: 5
221154	Mean Well	MPS-65-12	+12V @ 0-5.2A	62.4W	90-264 @ 47-440	100	UL/CUL/TUV/CE	$22.95	$19.95
2129633	Elpac	MS6524F	+24V @ 2.7A	65.0W	85-264 @ 50-60	240	UL/CSA/TUV/CE	6.95	5.95
2129684	Elpac	MSM7524F	+24V @ 4.6A	110.0W	90-264 @ 47-63	240	UL/CUL/CE	15.95	13.95
2129676	Elpac	MSM40D	+5.1V @ 4A; +24V @ 1A; -12V @ 0.4A	110.0W	90-264 @ 47-63	50	UL/CUL/CSA/CE	12.95	10.95

* Primary Output

Enclosed Switching AC-to-DC Power Supplies

★Web Code: EPS

- 100% full-load burn-in test
- Wide AC input range
- Manufacturer warranty varies

Complete specifications available online

SP-150

HRPG-150

HRP-300

RSP-1500

NES-75

SE-600

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing: 1	Pricing: 5
Single Output												
2106685	Mean Well	RS-15-3.3	+3.3V @ 0-3A	9.9W	2.5 x 2.0 x 1.1	80	2.0	0.5	—	UL/CUL/TUV/CE/CB	$13.95	$12.49
693193	Mean Well	RS-25-3.3	+3.3V @ 0-6A	19.8W	3.0 x 2.0 x 1.1	80	2.0	0.5	—	UL/CUL/TUV/CE/CB	14.95	13.49
1919043	Mean Well	RS-15-5	+5V @ 0-3A	15W	2.5 x 2.0 x 1.1	80	1.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
323282	Mean Well	RS-25-5	+5V @ 0-5A	25W	3.1 x 2.0 x 1.1	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	14.95	13.49
123247	Mean Well	S-25-5	+5V @ 0-5A	25W	3.9 x 3.8 x 1.4	50	1.0	0.5	—	UL/TUV/CE	18.95	16.95
123290	Mean Well	S-40-5	+5V @ 0-8A	40W	5.1 x 3.9 x 1.5	75	1.0	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323388	Mean Well	RS-50-5	+5V @ 0-10A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	17.95	16.49
689768	Potrans	FS-06005-0M	+5V @ 0-12A	60W	5.1 x 3.9 x 1.5	120	—	—	—	UL/CUL/CE	10.95	9.95
123327	Mean Well	S-60-5	+5V @ 0-12A	60W	6.3 x 3.8 x 1.5	120	1.0	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
201962	Mean Well	S-100F-5	+5V @ 0-20A	100W	7.8 x 3.9 x 1.5	100	1.0	0.5	—	UL/CUL/TUV/CE/CB	29.95	27.95
194791	Mean Well	SP-100-5	+5V @ 0-20A	100W	7.0 x 3.9 x 1.8	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	39.95	36.95
123394	Mean Well	S-150-5	+5V @ 0-30A	150W	7.0 x 4.3 x 2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.95
201912	Mean Well	SP-150-5	+5V @ 0-30A	150W	7.0 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
202042	Mean Well	SP-200-5	+5V @ 0-40A	200W	7.0 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
2102490	Mean Well	SP-240-5	+5V @ 0-45A	225W	7.5 x 3.7 x 2.0	150	1.0	0.5	✔	UL/CUL/TUV/CE/CB	52.95	47.95
216776	Mean Well	S-320-5	+5V @ 0-50A	250W	8.5 x 4.5 x 2.0	150	1.0	0.5	—	UL/CUL	69.95	64.95
244735	Mean Well	SP-320-5	+5V @ 0-55A at 230VAC; 0-44A at 115VAC	275W	8.5 x 4.5 x 2.0	150	1.0	0.5	✔	UL/CUL/TUV/CE/CB	64.95	58.95
693644	Mean Well	SP-480-5	+5V @ 0-85A	425W	10.9 x 5.0 x 1.7	80	1.0	0.5	✔	UL/CUL/TUV/CE/CB	134.95	124.95
374002	Mean Well	SE-600-05	+5V @ 0-100A	500W	9.7 x 5.0 x 2.5	150	2.0	0.5	—	UL/CUL	99.95	89.95
693661	Mean Well	SP-750-5	+5V @ 0-120A	600W	10.9 x 5.0 x 2.5	120	2.0	0.5	✔	UL/CUL/TUV/CE/CB	199.95	189.95
123415	Mean Well	S-150-7.5	+7.5V @ 0-20A	150W	7.0 x 4.3 x 2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	34.95	31.95
207212	Mean Well	S-320-7.5	+7.5V @ 0-36A	270W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
394215	Mean Well	SP-320-7.5	+7.5V @ 0-40A	300W	8.5 x 4.5 x 2.0	150	1.0	0.5	✔	UL/CUL/TUV/CE/CB	64.95	58.95
693353	Mean Well	S-150-9	+9V @ 0-16.70A	150.3W	7.8 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
1919051	Mean Well	RS-15-12	+12V @ 0-1.3A	15.6W	2.5 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
2120356	Potrans	FS-02512-1M-02	+12V @ 2.1A	25.2W	3.9 x 3.8 x 1.3	120	0.05	0.05	—	UL/CUL/CE	8.95	7.95
323300	Mean Well	RS-25-12	+12V @ 0-2.1A	25.2W	3.0 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.95	13.49
123255	Mean Well	S-25-12	+12V @ 0-2.1A	25.2W	3.9 x 3.8 x 1.4	100	0.5	0.5	—	UL/TUV/CE	18.95	16.95
323337	Mean Well	RS-35-12	+12V @ 0-3A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	15.95	14.49
123298	Mean Well	S-40-12	+12V @ 0-3.5A	42W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323396	Mean Well	RS-50-12	+12V @ 0-4.2A	50.4W	3.9 x 3.8 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	17.95	16.49
123335	Mean Well	S-60-12	+12V @ 0-5A	60W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49

* Primary Output

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Enclosed Switching AC-to-DC Power Supplies (Continued)

Complete specifications available online

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

★Web Code: EPS

PSP-600


RS-25

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 5
Single Output (Continued)												
323599	Mean Well	RS-75-12	+12V @ 0-6A	72W	5.1 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	$20.95	$19.49
194838	Mean Well	SP-75-12	+12V @ 0-6.3A	75.6W	7.0 x 3.9 x 1.3	80	0.5	0.5	✔	UL/CUL/TUV/CE/CB	34.95	31.95
2105017	Mean Well	NES-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/CE/CB	21.95	19.49
123386	Mean Well	S-100F-12	+12V @ 0-8.5A	102W	7.8 x 3.9 x 1.5	125	0.5	0.5	—	UL/TUV/CE/CB	29.95	27.95
323716	Mean Well	RS-100-12	+12V @ 0-8.5A	102W	6.3 x 3.8 x 1.5	120	0.5	0.5	✔	UL/CUL/TUV/CE/CB	29.95	26.95
194803	Mean Well	SP-100-12	+12V @ 0-8.5A	102W	7.0 x 3.9 x 1.8	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	39.95	36.95
123423	Mean Well	S-150-12	+12V @ 0-12.5A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
323839	Mean Well	RS-150-12	+12V @ 0-12.5A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	31.95	28.95
173421	Mean Well	SP-150-12	+12V @ 0-12.5A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
2094848	Mean Well	HRPG-150-12	+12V @ 0-13A	156W	6.3 x 3.8 x 1.5	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	79.95	72.95
2138839	Globe Tek	SP-200-12GL(R)	+12V @ 0-16.7A	200.4W	7.8 x 3.9 x 2.0	100	1.0	0.5	✔	UL/CUL/TUV/CE	19.95	17.95
194774	Mean Well	SP-200-12	+12V @ 0-16.7A	200.4W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
2101497	Mean Well	SP-240-12	+12V @ 0-20A	240W	7.5 x 3.7 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	52.95	47.95
207204	Mean Well	S-320-12	+12V @ 0-25A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
244743	Mean Well	SP-320-12	+12V @ 0-25A at 230VAC; 0-20A @ 115VAC	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	64.95	58.95
2102203	Mean Well	HRP-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	99.95	89.95
2094872	Mean Well	HRPG-300-12	+12V @ 0-27A	324W	7.8 x 4.1 x 1.6	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	109.95	99.95
2094928	Mean Well	SE-450-12	+12V @ 0-37.5A	450W	8.9 x 4.9 x 2.0	200	1.0	0.5	✔	UL/CUL	76.95	69.95
2122319	Mean Well	HRP-450-12	+12V @ 0-37.5A	450W	8.6 x 4.1 x 1.6	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	129.95	119.95
301373	Mean Well	SP-480-12	+12V @ 0-40A at 230VAC; 0-36A @ 115VAC	480W	10.9 x 5.0 x 1.7	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	134.95	124.95
190693	Mean Well	SP-500-12	+12V @ 0-40A at 230VAC; 0-34A @ 115VAC	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	139.95
374011	Mean Well	SE-600-12	+12V @ 0-50A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	99.95	89.95
374214	Mean Well	PSP-600-12	+12V @ 0-50A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	139.95	126.95
2094961	Mean Well	HRPG-600-12	+12V @ 0-53A	636W	8.6 x 4.1 x 2.5	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	179.95	159.95
319944	Mean Well	SP-750-12	+12V @ 0-62A	750W	10.9 x 5.0 x 2.5	120	0.5	0.3	✔	UL/CUL/TUV/CE/CB	199.95	189.95
202025	Mean Well	S-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
394193	Mean Well	SP-150-13.5	+13.5V @ 0-11.2A	151.2W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
212410	Mean Well	SP-200-13.5	+13.5V @ 0-14.9A	201.1W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
693572	Mean Well	S-320-13.5	+13.5V @ 0-22A	297W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
693599	Mean Well	SP-320-13.5	+13.5V @ 0-22A	297W	8.5 x 4.5 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	64.95	58.95
212389	Mean Well	SP-500-13.5	+13.5V @ 0-36A at 230VAC; 0-30.6A @ 115VAC	486W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	139.95
2106079	Mean Well	PSP-600-13.5	+13.5V @ 0-44.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	139.95	126.95
2105439	Mean Well	AD-155A	+13.8V @ 0-5A 10.5A	151.6W	7.8 x 4.3 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	54.95	48.95
1919060	Mean Well	RS-15-15	+15V @ 0-1A	15W	2.5 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
123263	Mean Well	S-25-15	+15V @ 0-1.7A	25.5W	3.9 x 3.8 x 1.4	100	0.5	0.5	—	UL/TUV/CE	18.95	16.95
323302	Mean Well	RS-25-15	+15V @ 0-1.7A	25.5W	3.0 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.95	13.49
323345	Mean Well	RS-35-15	+15V @ 0-2.4A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	15.95	14.49
155053	Skynet	SNP-9548-M1	+15V @ 2.6A	39W	5.0 x 3.0 x 1.2	100	1.0	1.0	—	UL/CUL/CSA	9.95	8.95
202140	Mean Well	S-40-15	+15V @ 0-2.8A	42W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323409	Mean Well	RS-50-15	+15V @ 0-3.4A	51W	3.9 x 3.8 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	17.95	16.49
123343	Mean Well	S-60-15	+15V @ 0-4A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
323602	Mean Well	RS-75-15	+15V @ 0-5A	75W	5.1 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	20.95	19.49
194845	Mean Well	SP-75-15	+15V @ 0-5A	75W	7.0 x 3.8 x 1.3	80	0.5	0.5	✔	UL/CUL/TUV/CE/CB	34.95	31.95
212450	Mean Well	S-100F-15	+15V @ 0-6.7A	100.5W	7.8 x 3.9 x 1.5	125	0.5	0.5	—	UL/CUL/TUV/CE/CB	29.95	27.95
212433	Mean Well	SP-100-15	+15V @ 0-6.7A	100.5W	7.0 x 3.9 x 1.8	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	39.95	36.95
323724	Mean Well	RS-100-15	+15V @ 0-7A	105W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
123432	Mean Well	S-150-15	+15V @ 0-10A	150W	7.0 x 4.3 x 2.0	180	0.3	0.3	—	UL/CUL/TUV/CE/CB	34.95	31.95
323847	Mean Well	RS-150-15	+15V @ 0-10A	150W	7.8 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	31.95	28.95
173412	Mean Well	SP-150-15	+15V @ 0-10A	150W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
2094856	Mean Well	HRPG-150-15	+15V @ 0-10A	150W	6.3 x 3.8 x 1.5	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	79.95	72.95
202060	Mean Well	SP-200-15	+15V @ 0-13.4A	201W	7.0 x 3.9 x 2.0	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
374993	Mean Well	S-320-15	+15V @ 0-20A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
693610	Mean Well	SP-320-15	+15V @ 0-20A	300W	8.5 x 4.5 x 2.0	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	64.95	58.95
693652	Mean Well	SP-480-15	+15V @ 0-35A	480W	10.9 x 5.0 x 1.7	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	134.95	124.95
291522	Mean Well	SE-600-15	+15V @ 0-40A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	99.95	89.95
374222	Mean Well	PSP-600-15	+15V @ 0-40A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	129.95	119.95

*Primary Output

Continued on next page

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies



SP-500

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing 1	Pricing 5
Single Output (Continued)												
2094901	Mean Well	HRPG-600-15	+15V @ 0-43A	645W	8.6 x 4.1 x 2.5	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	$179.95	$159.95
1585696	Mean Well	RSP-1000-15	+15V @ 0-50A	750W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE	259.95	239.95
694920	Mean Well	RSP-1500-15	+15V @ 0-100A	1500W	10.9 x 5.0 x 3.3	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	339.95	324.95
1919078	Mean Well	RS-15-24	+24V @ 0-0.625A	15W	2.5 x 2.0 x 1.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	12.95	11.95
123272	Mean Well	S-25-24	+24V @ 0-1.1A	26.4W	3.9 x 3.8 x 1.4	100	0.5	0.5	—	UL/TUV/CE	18.95	16.95
323311	Mean Well	RS-25-24	+24V @ 0-1.1A	26.4W	3.0 x 2.0 x 1.1	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.95	13.49
323353	Mean Well	RS-35-24	+24V @ 0-1.5A	36W	3.9 x 3.2 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	15.95	14.49
123319	Mean Well	S-40-24	+24V @ 0-1.8A	43W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	UL/CUL/TUV/CE/CB	21.95	19.95
323417	Mean Well	RS-50-24	+24V @ 0-2.2A	52.8W	3.9 x 3.8 x 1.4	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	17.95	16.49
123352	Mean Well	S-60-24	+24V @ 0-2.5A	60W	6.3 x 3.8 x 1.5	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
323620	Mean Well	RS-75-24	+24V @ 0-3.2A	76.8W	5.1 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	20.95	19.49
2104250	Mean Well	NES-75-24	+24V @ 0-3.2A	76.8W	6.3 x 3.8 x 1.5	200	0.5	0.5	—	UL/CUL/CE/CB	18.95	16.95
194854	Mean Well	SP-75-24	+24V @ 0-3.2A	76.8W	7.0 x 3.9 x 1.3	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	34.95	31.95
194812	Mean Well	SP-100-24	+24V @ 0-4.2A	100.8W	7.0 x 3.9 x 1.8	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	39.95	36.95
201971	Mean Well	S-100F-24	+24V @ 0-4.5A	108W	7.8 x 3.9 x 1.5	150	0.5	0.5	—	UL/TUV/CE/CB	29.95	27.95
323732	Mean Well	RS-100-24	+24V @ 0-4.5A	108W	6.3 x 3.8 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
155651	Power One	MAP110-1024CM	+24V @ 5A or +28V @ 4.3A	120W	7.0 x 4.3 x 1.8	240	0.5	1.0	—	UL/CSA/TUV	19.95	17.95
173404	Mean Well	SP-150-24	+24V @ 0-6.25A	150W	7.0 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
123450	Mean Well	S-150-24	+24V @ 0-6.5A	156W	7.0 x 4.3 x 2.0	240	0.2	0.2	—	UL/CUL/TUV/CE/CB	34.95	31.95
323855	Mean Well	RS-150-24	+24V @ 0-6.5A	156W	7.8 x 3.9 x 1.5	120	0.5	0.5	—	UL/CUL/TUV/CE/CB	31.95	28.95
2101868	Mean Well	HRP-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	69.95	64.95
2094864	Mean Well	HRPG-150-24	+24V @ 0-6.5A	156W	6.3 x 3.8 x 1.5	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	79.95	72.95
2135523	TDK/Lambda	HWS150-24/A	+24V @ 0-6.5A	156W	6.3 x 1.7 x 3.2	150	0.5	0.3	—	UL/CSA/CE/EN/IEC	64.95	54.95
194782	Mean Well	SP-200-24	+24V @ 0-8.4A	201.6W	7.0 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
2104583	Mean Well	S-250-24	+24V @ 0-10A	240W	5.9 x 5.5 x 3.4	120	0.5	0.5	—	UL/CUL	48.95	43.95
2101518	Mean Well	SP-240-24	+24V @ 0-10A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	52.95	47.95
196657	Mean Well	S-320-24	+24V @ 0-12.5A	300W	8.5 x 4.5 x 2.0	150	0.5	0.5	—	UL/CUL	69.95	64.95
244752	Mean Well	SP-320-24	+24V @ 0-13A	312W	8.5 x 4.5 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	64.95	58.95
2102220	Mean Well	HRP-300-24	+24V @ 0-14A	336W	7.7 x 4.1 x 1.6	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	99.95	89.95
2094881	Mean Well	HRPG-300-24	+24V @ 0-14A	336W	7.8 x 4.1 x 1.6	150	0.5	0.3	✔	UL/CUL/TUV/CE/CB	109.95	99.95
2101606	Mean Well	SE-450-24	+24V @ 0-18.8A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	—	UL/CUL	76.95	69.95
2122335	Mean Well	HRP-450-24	+24V @ 0-18.8A	451.2W	8.6 x 4.1 x 1.6	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	129.95	119.95
301322	Mean Well	SP-480-24	+24V @ 0-22A	480W	10.9 x 5.0 x 1.7	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	134.95	124.95
147054	Mean Well	SP-500-24	+24V @ 0-20A	480W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	139.95
295902	Mean Well	SE-600-24	+24V @ 0-25A	600W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	99.95	89.95
374231	Mean Well	PSP-600-24	+24V @ 0-25A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	139.95	126.95
320048	Mean Well	SP-750-24	+24V @ 0-31.3A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	✔	UL/CUL/TUV/CE/CB	199.95	189.95
1585717	Mean Well	RSP-1000-24	+24V @ 0-40A	960W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	259.95	239.95
2101569	Mean Well	SE-1000-24	+24V @ 0-41.7A	1000.8W	10.9 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	204.95	184.95
694938	Mean Well	RSP-1500-24	+24V @ 0-63A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	339.95	324.95
693409	Mean Well	SP-75-27	+27V @ 0-2.8A	75.6W	7.0 x 3.9 x 1.3	100	0.5	0.5	✔	UL/CUL/TUV/CE/CB	34.95	31.95
202033	Mean Well	S-150-27	+27V @ 0-5.6A	151.2W	7.0 x 4.3 x 2.0	240	0.2	0.2	—	UL/CUL/TUV/CE/CB	34.95	31.95
693513	Mean Well	SP-150-27	+27V @ 0-5.6A	151.2W	7.8 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
693548	Mean Well	SP-200-27	+27V @ 0-7.5A	202.5W	7.0 x 3.9 x 2.0	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
693581	Mean Well	S-320-27	+27V @ 0-11.0A	297W	8.5 x 4.5 x 2.0	200	0.5	0.5	—	UL/CUL	69.95	64.95
693628	Mean Well	SP-320-27	+27V @ 0-11.7A	315.9W	8.5 x 4.5 x 2.0	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	64.95	58.95
190706	Mean Well	SP-500-27	+27V @ 0-18A	486W	6.7 x 4.7 x 3.7	200	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	139.95
295911	Mean Well	SE-600-27	+27V @ 0-22.2A	599.4W	9.7 x 5.0 x 2.5	150	0.5	0.5	—	UL/CUL	99.95	89.95
374257	Mean Well	PSP-600-27	+27V @ 0-22.2A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	139.95	126.95
374038	Mean Well	SP-750-27	+27V @ 0-27.8A	750W	10.9 x 5.0 x 2.5	120	0.5	0.2	✔	UL/CUL/TUV/CE/CB	199.95	189.95
1585709	Mean Well	RSP-1000-27	+27V @ 0-37.0A	999W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	259.95	239.95
694946	Mean Well	RSP-1500-27	+27V @ 0-56A	1512W	10.9 x 5.0 x 3.3	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	339.95	324.95
2102983	Mean Well	PB-120N-27C	+27.6V @ 0-4.3A	118.7W	7.1 x 3.8 x 1.9	150	§	§	—	UL/CUL/TUV/CE/CB	44.95	39.95

*Primary Output § Load/line regulation is dependent on battery current requirement

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies

SP-200

★Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing: 1	Pricing: 5
Single Output (Continued)												
2146118	Mean Well	AD-155B	+27.6V @ 0-5.5A	152W	7.8 x 4.3 x 2.0	150	0.5	0.5	—	UL/CUL/TUV/CE/CB	$54.95	$48.95
2102473	Mean Well	SP-240-30	+30V @ 0-8A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	52.95	47.95
2101024	Mean Well	HRP-75-36	+36V @ 0-2.1A	75.6W	5.1 x 3.9 x 1.5	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	48.95	44.95
2102730	Mean Well	SP-320-36	+36V @ 0-8.8A	316.8W	8.5 x 4.5 x 2.0	220	0.5	0.2	✔	UL/CUL/TUV/CE/CB	64.95	58.95
2104524	Mean Well	SE-600-36	+36V @ 0-16.6A	598W	9.7 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	99.95	89.95
2101753	Mean Well	HRPG-600-36	+36V @ 0-17.5A	630W	8.6 x 4.1 x 2.5	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	179.95	159.95
693206	Mean Well	RS-25-48	+48V @ 0-0.57A	27.4W	3.1 x 2.0 x 1.1	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	14.95	13.49
693249	Mean Well	RS-50-48	+48V @ 0-1.1A	52.8W	3.9 x 3.8 x 1.4	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	17.95	16.49
216793	Mean Well	S-100F-48	+48V @ 0-2.2A	105.6W	7.8 x 3.9 x 1.5	150	0.5	0.5	—	UL/TUV/CE/CB	29.95	27.95
167346	Mean Well	S-150-48	+48V @ 0-3.2A	153.6W	7.0 x 4.3 x 2.0	240	0.2	0.2	—	UL/CUL/TUV/CE/CB	34.95	31.95
201929	Mean Well	SP-150-48	+48V @ 0-3.2A	154W	7.0 x 3.9 x 2.0	250	0.5	0.5	✔	UL/CUL/TUV/CE	39.95	36.95
201930	Mean Well	SP-150-48	+48V @ 0-3.2A	153.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	✔	UL/CUL/TUV/CE/CB	44.95	41.95
323863	Mean Well	RS-150-48	+48V @ 0-3.3A	158.4W	7.8 x 3.9 x 1.5	200	0.5	0.5	—	UL/CUL/TUV/CE/CB	31.95	28.95
202068	Mean Well	SP-200-48	+48V @ 0-4.2A	201.6W	7.0 x 3.9 x 2.0	250	0.5	0.5	✔	UL/CUL/TUV/CE/CB	49.95	45.95
2102481	Mean Well	SP-240-48	+48V @ 0-5A	240W	7.5 x 3.7 x 2.0	150	0.5	0.2	✔	UL/CUL/TUV/CE/CB	52.95	47.95
207191	Mean Well	S-320-48	+48V @ 0-6.5A	312W	8.5 x 4.5 x 2.0	240	0.5	0.5	—	UL/CUL	69.95	64.95
244770	Mean Well	SP-320-48	+48V @ 0-6.7A	321.6W	8.5 x 4.5 x 2.0	240	0.5	0.2	✔	UL/CUL/TUV/CE/CB	64.95	58.95
2102326	Mean Well	HRP-300-48	+48V @ 0-7.0A	336W	7.8 x 4.1 x 1.6	250	0.5	0.2	✔	UL/CUL/TUV/CE/CB	99.95	89.95
2105164	Mean Well	SE-450-48	+48V @ 0-9.4A	451.2W	8.9 x 4.9 x 2.0	200	0.5	0.2	—	UL/CUL	76.95	69.95
301402	Mean Well	SP-480-48	+48V @ 0-11A	480W	10.9 x 5.0 x 1.7	240	0.5	0.2	✔	UL/CUL/TUV/CE/CB	134.95	124.95
161796	Mean Well	SP-500-48	+48V @ 0-10A	480W	6.7 x 4.7 x 3.7	300	0.5	0.5	✔	UL/CUL/TUV/CE/CB	149.95	139.95
295929	Mean Well	SE-600-48	+48V @ 0-12.5A	600W	9.7 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	99.95	89.95
374249	Mean Well	PSP-600-48	+48V @ 0-12.5A	600W	6.7 x 4.7 x 3.7	240	0.5	0.5	✔	UL/CUL/TUV/CE/CB	129.95	119.95
2101577	Mean Well	SE-1000-48	+48V @ 0-20.8A	998.4W	10.9 x 5.0 x 2.5	200	0.5	0.5	—	UL/CUL	204.95	184.95
1585725	Mean Well	RSP-1000-48	+48V @ 0-21.0A	1008W	11.6 x 5.0 x 1.6	150	0.5	0.5	✔	UL/CUL/TUV/CE/CB	259.95	239.95
231722	Mean Well	PSP-1500-48	+48V @ 0-28.5A	1368W	10.9 x 5.1 x 7.5	200	0.5	0.2	✔	UL/CUL/TUV/CE/CB	274.95	269.95
694954	Mean Well	RSP-1500-48	+48V @ 0-32.0A	1536W	10.9 x 5.0 x 3.3	200	0.5	0.5	✔	UL/CUL/TUV/CE/CB	339.95	324.95
2108921	Mean Well	RSP-3000-48	+48V @ 0-62.5A	3000W	10.9 x 7.0 x 2.5	200	0.5	0.5	✔	UL/CUL/TUV/CE/CB	524.95	474.95
Double Output												
323362	Mean Well	RD-35A	+5V @ 0.3-4A; +12V @ 0.2-1A	32W	3.9 x 3.2 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	$20.95	$18.95
323380	Mean Well	RD-35B	+5V @ 0.3-4A; +24V @ 0.2-1.3A	51.2W	3.9 x 3.2 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	20.95	18.95
323425	Mean Well	RD-50A	+5V @ 0.3-6A; +12V @ 0.3-3A	54W	3.9 x 3.8 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
323433	Mean Well	RD-50B	+5V @ 0.3-6A; +24V @ 0.2-2A	53.6W	3.9 x 3.8 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	23.95	21.49
123458	Mean Well	D-60A	+5V @ 0.3-4A; +12V @ 0.2-3A	56W	6.3 x 3.8 x 1.5	75	0.5	0.5	—	UL/CUL/TUV/CE/CB	27.95	24.95
123466	Mean Well	D-60B	+5V @ 0.3-3A; +24V @ 0.2-1.8A	58W	6.3 x 3.8 x 1.5	75	0.5	0.5	—	UL/CUL/TUV/CE/CB	27.95	24.95
323505	Mean Well	RD-65A	+5V @ 0.3-8A; +12V @ 0.2-4A	66W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	26.95	23.95
323513	Mean Well	RD-65B	+5V @ 0.3-8A; +24V @ 0.2-3A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	26.95	23.95
323628	Mean Well	RD-85A	+5V @ 2.0-10A; +12V @ 0.3-5A	88W	6.3 x 3.8 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	37.95	33.49
132410	Mean Well	D-120A	+5V @ 2.0-12A; +12V @ 0.5-5A	120W	7.0 x 3.9 x 2.0	60	0.5	0.5	—	UL/CUL/TUV/CE/CB	44.95	39.95
132397	Mean Well	D-120B	+5V @ 2.0-6A; +24V @ 0.4-4A	126W	7.0 x 3.9 x 2.0	60	0.5	0.5	—	UL/CUL/TUV/CE/CB	44.95	39.95
323741	Mean Well	RD-125A	+5V @ 2.0-15A; +12V @ 0.5-10A	130.9W	7.8 x 3.9 x 1.5	80	3.0	1.0	—	UL/CUL/TUV/CE/CB	38.95	34.95
323759	Mean Well	RD-125B	+5V @ 2.0-10A; +24V @ 0.4-5A	133.4W	7.8 x 3.9 x 1.5	80	3.0	1.0	—	UL/CUL/TUV/CE/CB	38.95	34.95
2106124	Mean Well	RD-125-1224	+12V @ 1.0-3.7A; +24V @ 0.4-3.7A	133.2W	7.8 x 3.9 x 1.5	120	1.0	0.5	—	UL/CUL/TUV/CE/CB	38.95	34.95
Triple Output												
201989	Mean Well	T-40A	+5V @ 0.6-3A; +12V @ 0.2-2A; -5V @ 0.1-0.5A	41.5W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	CSA/CE	$26.95	$23.95
201997	Mean Well	T-40B	+5V @ 0.6-3A; +12V @ 0.2-2A; -12V @ 0.1-0.5A	45W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	CSA/CE	26.95	23.95
202009	Mean Well	T-40C	+5V @ 0.6-3A; +15V @ 0.2-1.5A; -15V @ 0.1-0.5A	45W	5.1 x 3.9 x 1.5	100	0.5	0.5	—	CSA/CE	26.95	23.95
323460	Mean Well	RT-50B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
323468	Mean Well	RT-50C	+5V @ 0-5A; +15V @ 0.2-2A; -15V @ 0.1-1A	50W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
323476	Mean Well	RT-50D	+5V @ 0.5-5A; +12V @ 0.1-1A; +24V @ 0.2-1.5A	51W	3.9 x 3.8 x 1.4	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	24.95	22.49
123482	Mean Well	T-60B	+5V @ 0.5-5A; +12V @ 0.2-2.5A; -12V @ 0-0.5A	61W	6.3 x 3.8 x 1.5	100	1.0	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
123491	Mean Well	T-60C	+5V @ 0.5-5A; +15V @ 0.2-2A; -15V @ 0-0.5A	62.5W	6.3 x 3.8 x 1.5	100	1.0	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
323540	Mean Well	RT-65B	+5V @ 0.5-8A; +12V @ 0.2-3.5A; -12V @ 0-1A	64.6W	5.1 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	28.95	25.95
323548	Mean Well	RT-65C	+5V @ 0.5-8A; +15V @ 0.2-3A; -15V @ 0-1A	65.5W	5.1 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	28.95	25.95
323555	Mean Well	RT-65D	+5V @ 0.5-8A; +12V @ 0.1-1A; +24V @ 0.2-2A	68W	5.1 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	28.95	25.95
323767	Mean Well	RT-125A	+5V @ 2-15A; +12V @ 0.5-6A; -5V @ 0.1-1A	131W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	39.95	36.95

*Primary Output

Continued on next page

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Enclosed Switching AC-to-DC Power Supplies (Continued)

• 100% full-load burn-in test • Wide AC input range • Manufacturer warranty varies



RQ-65

*Web Code: EPS

Part No.	Manufacturer	Mfr. Part No.	Output: Voltage @ Current (min-max)	Output: Power	Size (L" x W" x H")	Ripple & Noise (mV p-p)*	Load Reg. (±%)*	Line Reg. (±%)*	PFC	Certification	Pricing: 1	Pricing: 5
Triple Output (Continued)												
323775	Mean Well	RT-125B	+5V @ 2-15A; +12V @ 0.5-6A; -12V @ 0.1-1A	132W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	$39.95	$36.95
323783	Mean Well	RT-125C	+5V @ 2-15A; +15V @ 0.5-6A; -15V @ 0.1-1A	132.5W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	39.95	36.95
323792	Mean Well	RT-125D	+5V @ 2-15A; +12V @ 0.1-2A; +24V @ 0.4-4A	136W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	39.95	36.95
Quad Output												
323484	Mean Well	RQ-50B	+5V @ 0.5-6A; +12V @ 0.2-1.5A; -5V @ 0-1A; -12V @ 0-1A	45.5W	3.9 x 3.8 x 1.4	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	$26.95	$23.95
323572	Mean Well	RQ-65D	+5V @ 0.5-8A; +12V @ 0.2-3A; +24V @ 0.1-1.5A; -12V @ 0-1A	68W	5.1 x 3.9 x 1.5	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	29.95	26.95
323695	Mean Well	RQ-85D	+5V @ 2-10A; +12V @ 0.3-4A; +24V @ 0.1-1.5A; -12V @ 0-1A	84W	6.3 x 3.8 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	39.95	36.95
132389	Mean Well	Q-120B	+5V @ 2-11A; +12V @ 0.5-4A; -5V @ 0.2-1A; -12V @ 0.2-1A	120W	7.0 x 3.9 x 2.0	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	48.95	43.95
132371	Mean Well	Q-120D	+5V @ 2-8A; +12V @ 0.2-2A; +24V @ 0.2-2A; -12V @ 0.2-1A	124W	7.0 x 3.9 x 2.0	80	0.5	0.5	—	UL/CUL/TUV/CE/CB	48.95	43.95
323812	Mean Well	RQ-125D	+5V @ 2-12A; +12V @ 0.5-4A; +24V @ 0.1-2.5A; -12V @ 0-1A	124W	7.8 x 3.9 x 1.5	80	1.0	0.5	—	UL/CUL/TUV/CE/CB	44.95	39.95
213648	Mean Well	QP-150F	+5V @ 3-10A; +15V @ 0-3A; +24V @ 0.4-2A; -15V @ 0-0.6A	152W	7.8 x 3.9 x 1.5	120	2.0	1.0	✔	UL/CUL/TUV/CE/CB	89.95	79.95
213752	Mean Well	QP-200D	+5V @ 3-15A; +12V @ 0-4A +24V @ 0.4-3A; -12V @ 0-0.7A	204.9W	7.8 x 3.9 x 2.0	100	2.0	1.0	✔	UL/CUL/TUV/CE/CB	99.95	89.95
668764	Mean Well	QP-320D	+5V @ 2.5-20A; +12V @ 0-10A; +24V @ 0.2-5A; -12V @ 0.2-2A	316W	8.5 x 4.5 x 2.0	100	2.0	1.0	✔	UL/CUL/TUV/CE	119.95	108.95

*Primary Output

Mounting Brackets & Accessories for Mean Well Enclosed Switching AC-to-DC Power Supplies

All brackets use metric screws: 2-F3 x 6, 2-F4 x 6, 2-T3 x 6, 2-T4 x 6 and 8-T4 x 6 (not included)

*Web Code: MBM

Part No.	Mfr. P/N	For Models	1	10
222122	DRL-01	S-25/40, RS-25/35	$.99	$.89
222148	DRL-03	S-240/320, SP-320	2.49	2.25
222173	DRP-03	All Models	1.49	1.25
222182	MHS012	S-320/350, SP-100/150/200/320	.49	.39
222199	MHS025	SP-500, PSP-600	.59	.49
2172666	2026.0	DR, DRH, DRP, DRT, MDR, TDR	7.95	6.95
248736	2094.0	DR, DRH, DRP, DRT, MDR	8.95	7.95
2150379	TBC-07	D/ID, NED, RD, NES, RS, T, S, SD, HRP, SC	.49	.45



222122 4.35"L x 1.73"W x 2.52"H
222148 7.875"L x 2.48"W x 1.80"H

222173
1.75"L x 1.97"W x .345"H

222182
.767"L x .60"W x .625"H

222199
5.51"L x 7.89"W x .068"H

248736 (Slotted) DIN Mounting Rail
Length: 1 meter

2172666 (Unslotted) DIN Mounting Rail
Length: 1 meter

2150379
2.25"L x 0.4"W

Mating Connector

103588 $1.70/10
Spade Solderless Terminal

Crimp Tool

72996 $24.95
Solderless Terminal Crimp Tool

High Efficiency, Small Density Power Supplies

*ATX Web Code: HCA *Open-Frame Web Code: OSP

These new power supplies pack a big dose of power into a little size. Along with high efficiency ratings, these will definitely be able to handle the large loads you put them through every day, without wasting any power.

NEW MARKED IN PINK

2187948

• High power density: up to 15W/in.³ • Agency approvals: UL/CUL/CE • Active PFC (90-264VAC) • Universal AC input
• Short-circuit, over-voltage, over-power, over-temperature protection • High power density • Remote sense function

Part No.	Mfr. Part No.	Description	Output Voltage (VDC) @ Current (A)	Power (W)	Efficiency	Size (W" x D" x H")	1	5
2187921	400002-71-3	ATX active PFC supply	+3.3 @ 10; +5 @ 15; +12 @ 5; -12 @ 1; +5sb @ 1	125	Up to 87%	3.0" x 5.0" x 1.3"	$119.95	$109.95
2187930	400004-61-0	Dual-output open frame	+12 @ 10.4; +12 @ 1	125	Up to 92%	3.0" x 5.0" x 1.3"	99.95	89.95
2187956	400013-01-7	Dual-output open frame	+12 @ 13.3; +12 @ 1	160	Up to 90%	3.0" x 5.0" x 1.3"	114.95	104.95
2187972	400029-01-3*	Triple-output open frame	+12 @ 22.9; +12 @ 1; +5sb @ 1	275	Up to 91%	3.0" x 5.0" x 1.5"	189.95	174.95
2187981	400081-01-4	Quad-output open frame	+12 @ 23.3; +12 @ 5; +12 @ 1; +5sb @ 1	280	Up to 90%	3.0" x 5.3" x 1.4"	189.95	174.95
2188019	400040-01-0	Triple-output open frame	+12 @ 30; +12 @ 1; +5sb @ 1	375	Up to 93%	3.3" x 5.0" x 1.5"	249.95	224.95
2187948	400006-61-5	Dual-output open frame	+24 @ 5.2; +12 @ 1	125	Up to 92%	3.0" x 5.0" x 1.3"	79.95	74.95
2187964	400015-01-2	Dual-output open frame	+24 @ 6.7; +12 @ 1	160	Up to 90%	3.0" x 5.0" x 1.3"	114.95	104.95
2188027	400041-01-8	Triple-output open frame	+24 @ 15; +12 @ 1; +5sb @ 1	375	Up to 93%	3.3" x 5.0" x 1.5"	229.95	209.95
2188035	400042-01-6	Triple-output open frame	+48 @ 7.5; +12 @ 1; +5sb @ 1	375	Up to 93%	3.3" x 5.0" x 1.5"	209.95	194.95
2187999	400081-04-8	Quad-output open frame	+54 @ 5.2; +12 @ 5; +12 @ 1; +5sb @ 1	280	Up to 90%	3.0" x 5.3" x 1.4"	239.95	224.95
2188001	400091-01-3	Quad-output open frame	+54 @ 6.1; +12 @ 9; +12 @ 1; +5sb @ 1	330	Over 91%	3.0" x 5.3" x 1.4"	269.95	249.95

*I²C, PMBUS interface

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

LED Enclosed Power Supplies

For Indoor and Outdoor Applications

- Suitable for LED lighting & moving sign application
- Short-circuit/overload/overvoltage/overtemperature protection
- 100% full-load burn-in test
- Universal AC input/full range
- Cooling by free air convection
- UL1310 class 2 power unit

PLN Series

CLG Series

LPC/LPV/ELN/PLN Series
- Working temperature: -30˚C to 50˚C
- Plastic case
- Inrush current: 40A/230VAC
- Constant voltage and current
- Two-year warranty

CLG Series
- Metal case
- Working temperature: -30˚C to 70˚C
- Adjustable voltage and current
- Inrush current: 40A/230VAC
- Built-in active PFC function
- Three-year warranty

HLG Series
- Metal case
- Working temperature: -30˚C to 60˚C
- Adjustable voltage and constant current
- Inrush current: 75A/230VAC
- Built-in active PFC function
- Three-year warranty

PLP Series
- Open frame
- Working temperature: -30˚C to 70˚C
- Output current level adjustable
- Inrush current: 42A/230VAC
- Built-in PFC function
- Two-year warranty

PLC Series
- Plastic case
- Working temperature: -30˚C to 50˚C
- Adjustable voltage and current
- Inrush current: 40A/230VAC
- Built-in constant current limiting circuit
- Two-year warranty

★Web Code: LPP

Part No.	Manufacturer	Mfr. Part No.	Output Voltage @ Current (min-max)	Output Power (W)	Input Voltage (VAC @ Hz)	Size (L" x W" x H")	Enclosure Rating	Load Reg. (±%)*	Line Reg. (±%)*	Certification	Pricing 1	Pricing 5
2103222	Mean Well	LPV-20-5	+5V @ 0-3A	15	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	$11.95	$10.95
2101315	Mean Well	LPC-60-1400	+9-42V @ 1.4A	58.8	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CE	21.95	19.95
2101307	Mean Well	LPC-35-700	+9-48V @ 0.7A	33.6	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/TUV/CE	18.95	16.95
2120233	Advance	LED120A0012V10F	+12V @ 1A	12	120 @ 50-60	5.2 x 1.3 x 1.0	IP66	5.0	1.0	UL/CUL	12.95	11.49
2102596	Mean Well	LPV-20-12	+12V @ 0-1.67A	20	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	11.95	10.95
1954404	Mean Well	PLN-30-12	+12V @ 0-2.5A	30	90-295 @ 47-63	5.7 x 1.9 x 1.2	IP64	5.0	3.0	UL/CUL/TUV/CE	27.95	24.95
2103142	Mean Well	LPV-35-12	+12V @ 0-3A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	18.49	16.49
2122976	Mean Well	PLN-45-12	+12V @ 0-3.8A	45.6	90-295 @ 47-63	7.1 x 2.4 x 1.3	IP64	5.0	3.0	UL/CUL/TUV/CE/PFC	34.95	31.95
2103169	Mean Well	LPV-60-12	+12V @ 0-5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE	20.95	19.49
2105308	Mean Well	ELN-60-12 §	+12V @ 0-5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	26.95	23.95
1918913	Mean Well	PLN-60-12	+12V @ 0-5A	60	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CE/PFC	41.95	37.95
1918921	Mean Well	CLG-60-12	+12V @ 0-5A	60	90-295 @ 47-63	7.7 x 2.4 x 1.5	IP67	5.0	3.0	UL/CUL/TUV/CE	53.95	47.95
1585805	Mean Well	CLG-100-12	+12V @ 5A	60	90-264 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	69.95	62.95
2148105	Mean Well	HLG-120H-12B	+12V @ 10A	120	90-305 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	0.5	UL/CUL/TUV/CE/PFC	74.95	68.95
1954877	Mean Well	CLG-150-12A	+12V @ 0-11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	74.95	67.95
2108699	Mean Well	CLG-150-12 §	+12V @ 11A	132	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	1.0	0.5	UL/CUL/TUV/CE/PFC	74.95	67.95
2141780	Mean Well	HLG-320H-12A	+12V @ 22A	264	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP65	2.0	0.5	UL/CUL/TUV/CB/CE/PFC	129.95	119.95
2102609	Mean Well	LPV-20-15	+15V @ 0-1.33A	20	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/TUV/CE	11.95	10.95
1919001	Mean Well	CLG-60-15	+15V @ 0-4A	60	90-295 @ 47-63	6.8 x 2.4 x 1.5	IP67	5.0	3.0	UL/CUL/TUV/CE	53.95	47.95
1585856	Mean Well	CLG-100-15	+15V @ 0-5A	75	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CE/PFC	69.95	62.95
2102799	Mean Well	LPV-35-24	+24V @ 0-1.5A	36	90-264 @ 47-63	5.8 x 1.6 x 1.2	IP67	2.0	1.0	UL/CUL/TUV/CE	18.49	16.49
2102801	Mean Well	LPV-60-24	+24V @ 0-2.5A	60	90-264 @ 47-63	6.4 x 1.7 x 1.3	IP67	2.0	1.0	UL/CUL/TUV/CE	20.95	19.49
2104840	Mean Well	PLP-60-24†	+24V @ 0-2.5A	60	90-264 @ 47-63	4.0 x 2.0 x 1.2	—	5.0	3.0	TUV/CB/CE	20.95	18.95
2105252	Mean Well	ELN-60-24	+24V @ 2.5A	60	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	26.95	23.95
1919027	Mean Well	CLG-60-24	+24V @ 0-2.5A	60	90-295 @ 47-63	7.7 x 2.4 x 1.5	IP67	5.0	3.0	UL/CUL/TUV/CE	53.95	47.95
2103871	Mean Well	PLC-100-24	+24V @ 0-4A	96	90-264 @ 47-63	7.9 x 2.7 x 1.4	—	2.0	1.0	UL/CUL/TUV/CSA/CE/PFC	49.95	44.95
1585872	Mean Well	CLG-100-24	+24V @ 0-4A	96	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	2.0	1.0	UL/CUL/TUV/CE/PFC	69.95	62.95
1954885	Mean Well	CLG-150-24A	+24V @ 0-6.3A	150	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP65	1.0	0.5	UL/TUV/CE	74.95	67.95
2102174	Mean Well	HLG-240H-24A	+24V @ 10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP65	0.5	0.5	UL/CUL/TUV/CE/PFC	92.95	84.95
2115127	Mean Well	HLG-240H-24B	+24V @ 10A	240	90-305 @ 47-63	9.6 x 2.7 x 1.5	IP67	0.5	0.5	UL/CUL/TUV/CE/PFC	92.95	84.95
2147903	Mean Well	HLG-320H-24	+24V @ 13.3A	320	90-305 @ 47-63	9.9 x 3.5 x 1.7	IP67	0.5	0.5	UL/CUL/TUV/CB/CE/PFC	129.95	119.95
2105261	Mean Well	ELN-60-27 §	+27V @ 0-2.3A	62.1	90-264 @ 47-63	7.1 x 2.4 x 1.4	IP64	2.0	1.0	UL/CUL/TUV/CSA/CE	26.95	23.95
2100574	Mean Well	PLN-60-27	+27V @ 0-2.3A	62.1	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUS/TUV/CE/PFC	41.95	37.95
2102051	Mean Well	CLG-150-30B **	+30V @ 5A	150	90-295 @ 47-63	8.7 x 2.7 x 1.5	IP67	0.5	0.5	UL/TUV/CE/PFC	64.95	56.95
2101121	Mean Well	LPC-20-350	+48V @ 0-0.35A	16.8	90-264 @ 47-63	4.6 x 1.4 x 1.0	IP67	2.0	1.0	UL/CUL	12.95	11.49
2100591	Mean Well	PLN-60-48	+48V @ 0-1.3A	62.5	90-295 @ 47-63	7.1 x 2.4 x 1.4	IP64	5.0	3.0	UL/CUL/TUV/CSA/CE/PFC	41.95	37.95

*Primary Output **Dimmable † Open frame § Dimmable options

160W FULL RANGE SWITCHING ENCLOSED LED POWER SUPPLIES

- Circular shape design with aluminum case for bay lighting applications
- Full range universal AC input: 90-305VAC @ 47-63Hz, or 127-431VDC
- High efficiency: up to 93.5%
- Built-in active PFC function
- Short-circuit, over-current, over-voltage, and over-temperature protection
- Adjustable constant current level
- IP67/IP65 design for indoor or outdoor installation
- Suitable for dry, damp, or wet locations
- 158˚F (70˚C) operational
- 5-year warranty

HBG-160 Series

$84.95

★Web Code: LPP

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

DIN-Rail Switching Power Supplies

UL-508* ★Web Code: RBY

- Short-circuit, overload, overvoltage protection
- Low cost, high reliability
- 100% full-load burn-in test
- Universal AC input
- Soft-start circuit, limiting AC surge current range
- DIN-Rail terminal block & mounting rails online, use webcode "MBM"

* UL-508: Industrial Control Equipment certified

1943393 (Fig. 4) Rail not included

1943481 (Fig. 5) Rail not included

212291 (Fig. 6)

212274 (Fig. 7)

2081086 (Fig. 8) Rail not included

2100873 (Fig. 9) Rail not included


221892 (Fig. 10)

252663 (Fig. 11)

2094944 (Fig. 12) Rail not included

373182 (Fig. 1)

1943300 (Fig. 2) Rail not included

192699 (Fig. 3)

Part No.	Mfr. Part No.	Fig.	Output Volts @ Curr.	Pwr (W)	Input Voltage (VAC @ Hz/VDC)	Input Current @ Max Load	Size (L" x W" x H")	Wt. (lbs.)	Certification	1	5
2101243	DR-15-5℞	9	5VDC @ 2.4A	12	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	1.0 x 3.7 x 2.2	0.2	UL/CUL/TUV/CE	$14.95	$13.49
373174	DR-30-5℞	1	5VDC @ 3A	15	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	18.95	16.95
1943300	MDR-20-5℞	2	5VDC @ 3A	15	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	18.95	16.95
212303	DR-4505℞	3	5VDC @ 5A	25	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.9	UL/CUL/TUV/CE	21.95	19.95
1943393	MDR-40-5℞	4	5VDC @ 6A	30	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	24.95	22.49
1943449	MDR-60-5℞	4	5VDC @ 10A	50	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	28.95	25.95
1952978	MDR-10-12℞	2	12VDC @ 0.84A	10	85-264 @ 47-63/120-370	0.33A(155V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	15.95	14.49
2094952	DR-15-12℞	9	12VDC @ 1.25A	15	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	3.7 x 1.0 x 2.2	0.2	UL/CUL/TUV/CE	14.95	13.49
1943334	MDR-20-12℞	2	12VDC @ 1.67A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	18.95	16.95
373182	DR-30-12℞	1	12VDC @ 2A	24	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	18.95	16.95
1943406	MDR-40-12℞	4	12VDC @ 3.33A	40	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	24.95	22.49
192699	DR-4512℞	3	12VDC @ 3.5A	42	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	21.95	19.95
373230	DR-60-12℞	1	12VDC @ 4.5A	54	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	26.95	24.49
1943457	MDR-60-12℞	4	12VDC @ 5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	28.95	25.95
212291	DR-75-12℞	6	12VDC @ 6.3A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	39.95	36.95
1943511	DR-100-12℞	1	12VDC @ 7.5A	90	85-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	3.9 x 3.7 x 2.2	0.8	UL/CUL/TUV/CE	38.95	34.95
1943481	MDR-100-12℞	5	12VDC @ 7.5A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	46.95	42.95
212274	DR-120-12℞	7	12VDC @ 10A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	46.95	41.95
2099366	SDR-120-12℞†	8	12VDC @ 10A	120	88-264/124-370 @ 47-63	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	72.95	66.49
1943342	MDR-20-15℞	2	15VDC @ 1.24A	20	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	18.95	16.95
373238	DR-60-15℞	1	15VDC @ 4A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	26.95	24.49
1952986	MDR-10-24℞	2	24VDC @ 0.42A	10	85-264 @ 47-63/120-370	0.33A(115V)/0.21A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	15.95	14.49
2100873	DR-15-24℞	9	24VDC @ 0.63A	15.2	85-264 @ 47-63/120-370	0.88A(115V)/0.48A(230V)	2.2 x 1.0 x 3.7	0.2	UL/CUL/TUV/CE	14.95	13.49
1943385	MDR-20-24℞	2	24VDC @ 1A	24	85-264 @ 47-63/120-370	0.55A(115V)/0.35A(230V)	3.9 x 0.9 x 3.5	0.4	UL/CUL/TUV/CE	18.95	16.95
373203	DR-30-24℞	1	24VDC @ 1.5A	36	85-264 @ 47-63/120-370	1.1A(115V)/0.6A(230V)	3.1 x 3.7 x 2.2	0.6	UL/CUL/TUV/CE	18.95	16.95
1943422	MDR-40-24℞	4	24VDC @ 1.7A	40.8	85-264 @ 47-63/120-370	1.1A(115V)/0.7A(230V)	3.9 x 1.6 x 3.5	0.6	UL/CUL/TUV/CE	24.95	22.49
192681	DR-4524℞	3	24VDC @ 2A	48	85-264 @ 47-63/120-370	1.5A(115V)/0.75A(230V)	3.0 x 2.6 x 3.6	0.7	UL/CUL/TUV/CE	21.95	19.95
373246	DR-60-24℞	1	24VDC @ 2.5A	60	85-264 @ 47-63/124-370	1.8A(115V)/1.0A(230V)	3.1 x 3.7 x 2.2	0.7	UL/CUL/TUV/CE	26.95	24.49
1943465	MDR-60-24℞	4	24VDC @ 2.5A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	28.95	25.95
212282	DR-75-24℞	6	24VDC @ 3.2A	75	85-264 @ 47-63/120-370	2.0A(115V)/1.2A(230V)	3.9 x 2.1 x 4.9	1.2	UL/CUL/TUV/CE	39.95	36.95
1943490	MDR-100-24℞	5	24VDC @ 4A	90	85-264 @ 47-63/120-370	1.3A(155V)/0.8A(230V)	3.9 x 2.2 x 3.5	0.9	UL/CUL/TUV/CE	46.95	42.95
1943537	DR-100-24℞	1	24VDC @ 4.2A	100	88-264 @ 47-63/124-370	3.0A(115V)/1.6A(230V)	2.2 x 3.9 x 3.7	0.8	UL/CUL/TUV/CE	38.95	34.95
212266	DR-120-24℞	7	24VDC @ 5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	46.95	41.95
1953727	DRH-120-24℞	7	24VDC @ 5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	UL/CE	66.95	59.95
2099374	SDR-120-24℞†	8	24VDC @ 5A	120	88-264/124-370 @ 47-63	1.4A(115V)/10.7A(230V)	4.5 x 1.6 x 4.9	1.5	UL/CUL/TUV/CE	72.95	66.49
221892	DRP-240-24℞†	10	24VDC @ 10A	240	85-264 @ 47-63/120-370	2.8A(115V)/1.4A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	74.95	66.95
373123	DRT-240-24℞	10	24VDC @ 10A	240	3-phase 340-550 @ 47-63/480-780	0.95A(400V)/0.75A(500V)	3.9 x 4.9 x 4.9	2.9	UL/CUL/TUV/CE	89.95	81.95
2081086	SDR-240-24℞†	8	24VDC @ 10A	240	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	114.95	104.95
252663	DRP-480-24℞†	11	24VDC @ 20A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	109.95	99.95
295938	DRP-480S-24℞†	11	24VDC @ 20A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	124.95	114.95
372577	DRT-480-24℞	11	24VDC @ 20A	480	3-phase 340-550 @ 47-63/480-780	1.7A(400V)/1.3(500V)	8.9 x 5.0 x 3.9	5.5	UL/CUL/TUV/CE	124.95	114.95
2094944	SDR-480-24℞†	12	24VDC @ 20A	480	88-264 @ 47-63/124-370	2.6A(115V)/1.3A(230V)	4.9 x 3.4 x 5.0	4.9	UL/CUL/TUV/CE	164.95	154.95
373131	DRT-960-24℞	11	24VDC @ 40A	960	340-550 @ 47-63	2A(400V)/1.6A(500V)	10.9 x 3.9 x 4.9	7.3	UL/CUL/TUV/CE	249.95	229.95
1943473	MDR-60-48℞	4	48VDC @ 1.25A	60	85-264 @ 47-63/120-370	1.8A(115V)/1.0A(230V)	3.9 x 1.6 x 3.5	0.7	UL/CUL/TUV/CE	28.95	25.95
221904	DR-120-48℞	7	48VDC @ 2.5A	120	88-132/176-264* @ 47-63	2.8A(115V)/1.7A(230V)	2.6 x 3.9 x 4.9	1.4	UL/CUL/TUV/CE	46.95	41.95
1953735	DRH-120-48℞	7	48VDC @ 2.5A	120	340-550 @ 47-63/480-780	0.65A(400V)/0.6A(500V)	3.9 x 2.6 x 4.9	1.7	UL/CE	29.95	27.95
221883	DRP-240-48℞†	10	48VDC @ 5A	240	85-264 @ 47-63/120-370	3.5A(115V)/1.8A(230V)	3.9 x 4.9 x 4.9	2.4	UL/CUL/TUV/CE	74.95	66.95
2094936	SDR-240-48℞†	8	48VDC @ 5A	240	88-264 @ 47-63/120-370	2.6A(115V)/1.3A(350V)	2.5 x 4.9 x 4.5	2.5	UL/CUL/TUV/CE	114.95	104.95
252655	DRP-480-48℞†	11	48VDC @ 10A	480	180-264 @ 47-63/250-370	4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	109.95	99.95
301306	DRP-480S-48℞†	11	48VDC @ 10A	480	90-132/180-264* @ 47-63/254-370	11.0A(115V)/4.0A(230V)	8.9 x 3.9 x 4.9	4.6	UL/CUL/TUV/CE	124.95	114.95

*Switch selectable †With Power Factor Correction

40A DC DIN-Rail UPS Module & 20A Power Supply Redundancy Module

★Web Code: RBY

Part No.	Mfr. Part No.	Description	DC Input/DC BUS	Output Voltage @ Current	Charge Current	Certification	1	5
2103273	DR-UPS40℞	Battery controller for UPS	24-29V @ 40A	21-29VDC @ 0-40A	2A	CE	$46.95	$41.95
2105009	DR-RDN20℞	2-input redundancy module	21-28V @ 20A	30V @ 20A	—	CE	34.95	31.95

2103273 (Rail not included)

℞ RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

Dual Adj. Regulated Power Supply Kit

- Adjustable positive/negative supplies ±5 to ±15VDC, 175mA–750mA per supply
- LED on indicator • 48-piece kit
- PC board construction
- Difficulty level: intermediate • 120VAC input
- Size: 5.1"L x 3.5"W x 2.0"H • Weight: 2.1 lbs.

Part No.	Cross Ref. No.	1	5
20626	JE215	$29.95	$26.95

We carry AT & ATX Computer Power Supplies – See page 9

SmartPower™ DIN-Rail Power Supplies with LED Display

The Autotech SmartPower is a DC switching power supply with a 24V output voltage. These user-friendly power supplies have two 7-segment LED displays for voltage and current monitoring, and is ideal for industrial applications.

- Compact DIN-rail mounting • Voltage adjustable from 23-27V
- LED display for instant read-out of output voltages and current
- Universal input: 85-240VAC @ 50-60Hz • Size: 2.0"W x 3.1"H x 4.6"D
- Short-circuit, over-voltage and over-temperature protection
- Programmable current limit: 20% to 100% of full load with automatic recovery upon short-circuit

Part No.	Mfr. Part No.	Output Voltage @ Current	Power	Typ. Input Current @ Full Load @ 115VAC	Typ. Input Current @ Full Load @ 230VAC	Pricing 1	Pricing 5
2185601	SP-30W	+24V @ 1.2A	30W	0.65A	0.35A	$129.95	$119.95
2185619	SP-60W	+24V @ 2.5A	60W	1.15A	0.65A	159.95	149.95
2185627	SP-90W	+24V @ 3.75A	90W	1.55A	0.85A	189.95	174.95

★Power Inverters — Enter Web Code XEL

15 to 504-Watt Enclosed Converters

Performance at Value Prices

- 2:1 wide input range • 100% burn-in test • Working temp.: -10˚C to +60˚C • Protection: short-circuit, overload and overvoltage

SD-15 Series • Built-in EMI filter, low ripple noise • One-year warranty

SD-25/SD-50/SD-100/SD-150 Series • Isolation voltage: 1500VDC • Built-in EMI filter, low ripple noise • One-year warranty

SD-200/350 Series • Isolation volt.: 1500VDC • Cooling by free air convection • Fixed switching freq @ 83kHz • **SD-200:** One-year warranty; **SD-350:** Two-year warranty

SD-500 Series • Isolation voltage: 2000VAC • DC input active surge current limiting

- Wide 4:1 ~ 2:1 SC input range • Forced air cooling by built-in DC fan w/ fan speed control function • Three-year warranty

★Web Code: UBC

Part No.	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Power (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 5
1953778	SD-15A-5R	9.2-18V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	$14.95	$13.49
1953786	SD-15B-5R	18-36V	+5V @ 3.0A	15	3.1 x 2.0 x 1.1	5	0.5	0.5	100	CE	14.95	13.49
175662	SD-25A-5R	9-18V	+5V @ 5.0A	25	3.9 x 3.8 x 1.4	5	0.5	0.5	100	CE	22.95	20.95
212549	SD-50A-5R	9-18V	+5V @ 10A	50	6.3 x 3.8 x 1.5	5	0.5	0.5	100	CE	28.95	25.95
1953882	SD-200B-5R	19-36V	+5V @ 34A	170	8.5 x 4.5 x 2.0	9	0.5	1.0	100	CE	69.95	64.95
1953823	SD-15B-12R	18-36V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	14.95	13.49
1953840	SD-15C-12R	36-72V	+12V @ 1.25A	15	3.1 x 2.0 x 1.1	5	0.3	0.3	120	CE	14.95	13.49
175805	SD-25A-12R	9-18V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	CE	22.95	20.95
2107178	SD-25C-12R	36-72V	+12V @ 2.1A	25.2	3.9 x 3.8 x 1.4	5	0.3	0.3	120	CE	22.95	20.95
1537483	SD-50A-12R	9.2-18V	+12V @ 4.2A	50.1	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	28.95	25.95
212531	SD-50B-12R	19-36V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	28.95	25.95
212506	SD-50C-12R	36-72V	+12V @ 4.2A	50.4	6.3 x 3.8 x 1.5	5	0.3	0.3	120	CE	28.95	25.95
212469	SD-100C-12R	36-72V	+12V @ 8.5A	102	7.8 x 3.9 x 1.5	7	0.3	0.3	120	CE	36.95	32.95
217270	SD-150B-12R	19-36V	+12V @ 12.5A	150	7.8 x 4.3 x 2.0	7	0.5	0.5	120	CE	47.95	42.95
1953903	SD-200B-12R	19-36V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	100	CE	81.95	74.95
1953920	SD-200C-12R	36-72V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	CE	81.95	74.95
1953760	SD-200D-12R	72-144V	+12V @ 16.7A	200.4	8.5 x 4.5 x 2.0	9	0.5	1.0	120	TUV/CE	81.95	74.95
1953962	SD-350B-12R	19-36V	+12V @ 27.5A	330	8.5 x 4.5 x 2.0	9	0.3	1.0	120	CE	99.95	89.95
1954033	SD-500L-12R	19-72V	+12V @ 40A	480	8.5 x 4.5 x 2.0	7	0.5	0.5	150	CE	144.95	129.95
175813	SD-25A-24R	9-18V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	CE	22.95	20.95
2107186	SD-25C-24R	36-72V	+24V @ 1.1A	26.4	3.9 x 3.8 x 1.4	5	0.2	0.2	150	CE	22.95	20.95
2107266	SD-50A-24R	9.2-18V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	28.95	25.95
212514	SD-50B-24R	19-36V	+24V @ 2.1A	50.4	6.3 x 3.8 x 1.5	5	0.2	0.2	150	CE	28.95	25.95
2107039	SD-100C-24R	36-72V	+24V @ 4.2A	100.8	7.8 x 3.9 x 1.6	7	0.2	0.2	150	CE	36.95	32.95
2107098	SD-150C-24R	36-72V	+24V @ 6.3A	151.2	7.8 x 4.3 x 2.0	7	0.3	0.3	150	CE	47.95	42.95
2107119	SD-150D-24R	72-144V	+24V @ 6.3A	151.2	7.8 x 4.3 x 2.0	7	0.3	0.3	150	TUV/CE	47.95	42.95
1953954	SD-200B-24R	19-36V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	81.95	74.95
1953743	SD-200C-24R	36-72V	+24V @ 8.4A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	UL/CE	81.95	74.95
1954009	SD-350C-24R	36-72V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	CE	99.95	89.95
1953971	SD-350B-24R	19-36V	+24V @ 14.6A	350.4	8.5 x 4.5 x 2.0	9	0.2	1.0	150	CE	99.95	89.95
1954025	SD-500L-24R	19-72V	+24V @ 21A	504	8.5 x 4.5 x 2.0	7	0.5	0.5	150	TUV/CE	144.95	129.95
1953911	SD-200B-48R	19-36V	+48V @ 4.2A	201.6	8.5 x 4.5 x 2.0	9	0.5	1.0	150	CE	81.95	74.95
1953989	SD-350B-48R	19-36V	+48V @ 7.3A	350.4	8.5 x 4.5 x 2.0	9	0.3	1.0	120	CE	99.95	89.95

Unregulated Encapsulated Converters

★Web Code: SBH

- Input range: 4.5-5.5V
- Ripple & noise: 100mV p-p
- Input filter: capacitor type
- Line & load regulation: ±1.0%
- No external components needed
- 1000VDC isolation
- 100% burn-in test
- Protection: short-circuit
- One-year warranty
- Working temp.: -15˚C to +60˚C



Part No.	Mfr. Part No.	Output Voltage@Current	Output Power	Size (L"xW"xH")	Pins	Pricing 1	Pricing 5
213226	SRS-0505R	+5V @ 100mA	0.5W	.88 x .39 x .33	8	$4.49	$3.95
216831	SPR01L-12R	+12V @ 84mA	1W	.77 x .28 x .40	4	4.95	4.49

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

Jameco carries the full line of Mean Well Power products. For additional products visit www.Jameco.com/meanwellproducts

Encapsulated DC-to-DC Converters

★ Web Code: NAX

SLW05

SCW03, SCW05, SCW08, SDM30, SKE10, SKA15, SKE15 & SLW05 Series

- 1000VDC I/O isolation
- Shield metal case
- Cooling by free air convection
- Short-circuit/overload protection
- 2:1 wide input range
- One-year warranty

DCW12

SCW12 & DCW12 Series

- 2:1 wide input voltage range
- 1500VDC I/O isolation
- Built-in EMI filter
- Short-circuit/overload protection
- Built-in remote on/off control
- Five sided shielded metal case
- Two-year warranty

DCW03, DCW05, DCW08 & DKE10 Series

- 1000VDC I/O isolation
- Short-circuit/overload protection
- Shield metal case
- 2:1 wide input range
- Cooling by free air convection
- One-year warranty

DKE10 TKA30

DKA30 & TKA30 Series

- 1000VDC I/O isolation
- Cooling by free air convection
- 2:1 wide input range
- Short-circuit/overload protection
- Remote on/off control
- Six sided shielded metal case
- One-year warranty

Part No.	Manufacturer	Mfr. Part No.	Input Range	Output Voltage @ Current	Output Pwr (W)	Size (L" x W" x H")	Pins	Line Reg. (±%)	Load Reg. (±%)	Ripple & Noise (mV p-p)	Certification	Pricing 1	Pricing 5
Single Output													
213269	Mean Well	SCW03A-05	9-18V	+5V @ 0.6A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	$9.95	$8.95
216929	Mean Well	SLW05A-05	9-18V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	12.95	11.95
216937	Mean Well	SLW05B-05	18-36V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	12.95	11.95
1953313	Mean Well	SCW05B-05	18-36V	+5V @ 1A	5	1.25 x 0.8 x 0.48	8	0.5	0.5	50	CE	10.95	9.95
213234	Mean Well	SLW05C-05	36-72V	+5V @ 1A	5	2.0 x 1.0 x 0.44	5	1.0	0.2	100	CE	12.95	11.95
216962	Mean Well	SKE10A-05	9-18V	+5V @ 2A	10	2.0 x 1.0 x 0.44	5	0.3	1.0	50	CE	18.95	16.95
216953	Mean Well	SKE10B-05	18-36V	+5V @ 2A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	50	CE	18.95	16.95
1953428	Mean Well	SCW12A-05	9-18V	+5V @ 2.4A	12	1.25 x 0.8 x 0.48	9	0.5	0.5	50	CE	18.49	16.49
155716	Mean Well	SKE15A-05	9-18V	+5V @ 3A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	50	CE	18.95	16.95
1953495	Mean Well	SCW08A-12	9-18V	+12V @ 0.67A	8	1.25 x 0.8 x 0.48	8	0.5	0.5	60	CE	14.95	13.49
155708	Mean Well	SKE15A-12	9-18V	+12V @ 1.25A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	60	CE	18.95	16.95
1953161	Mean Well	SKA15A-12	9-18V	+12V @ 1.25A	15	2.0 x 1.0 x 0.44	5	0.2	0.5	60	CE	19.95	17.95
217242	Mean Well	SDM30-24S12	18-36V	+12V @ 2.5A	30	2.0 x 2.0 x 0.63	8	1.0	1.0	100	CE	26.95	24.49
216980	Mean Well	SKE10A-15	9-18V	+15V @ 0.666A	10	2.0 x 1.0 x 0.44	5	0.3	1.0	60	CE	18.95	16.95
155695	Mean Well	SKE15A-24	9-18V	+24V @ 0.625A	15	2.0 x 2.0 x 0.43	5	0.3	0.5	80	CE	18.95	16.95
Double Output													
155919	Mean Well	DCW03A-05	9-18V	±5V @ 0.3A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	$10.95	$9.49
217032	Mean Well	DKE10A-05	9-18V	±5V @ 1A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	50	CE	20.95	18.49
161702	Mean Well	DCW03A-12	9-18V	±12V @ 0.125A	3	1.25 x 0.8 x 0.48	10	1.0	0.5	100	CE	10.95	9.49
1953241	Mean Well	DCW05A-12	9-18V	±12V @ 0.23A	5.5	1.25 x 0.8 x 0.48	8	0.5	0.5	60	CE	11.95	10.95
1953356	Mean Well	DCW08A-12	9-18V	±12V @ 0.335A	8	1.25 x 0.8 x 0.48	8	0.5	0.5	60	CE	15.95	14.49
217092	Mean Well	DKE10A-12	9-18V	±12V @ 0.42A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	20.95	18.49
1953022	Mean Well	DCW12B-12	18-36V	±12V @ 0.5A	12	1.25 x 0.8 x 0.48	9	0.5	0.5	60	CE	18.95	16.95
1953364	Mean Well	DCW08A-15	9-18V	±15V @ 0.267A	8	1.25 x 0.8 x 0.48	8	0.5	0.5	60	CE	15.95	14.49
217112	Mean Well	DKE10A-15	9-18V	±15V @ 0.333A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	20.95	18.49
217075	Mean Well	DKE10B-15	18-36V	±15V @ 0.333A	10	2.0 x 1.0 x 0.44	5	0.3	0.5	60	CE	20.95	18.49
1954130	Mean Well	DKA30A-15	9-18V	±15V @ 1A	30	2.0 x 2.0 x 0.82	8	0.5	0.5	100	CE	28.95	25.95
Triple Output													
1953217	Mean Well	TKA30B-B	18-36V	+5V @ 3.5A; ±12V @ 0.31A	25	2.0 x 2.0 x 0.82	8	5.0	5.0	100	CE	$27.95	$25.95

Wall Adapter Power Supplies

2129650

- **2138636:** Input 100-240VAC @50-60Hz
- **2125991:** Input 120VAC @ 60Hz, 2.1mm x 5.5mm plug
- **2082142:** Input 120VAC @ 60Hz, screw terminals
- **2129650:** Input 100-240VAC @50-60Hz, 2.5mmx5.5mm plug
- Short-circuit, over-voltage and over-current protection

Part No.	Mfr.	Output	Description	1	10
2138636	Emerson	5VDC @ 0.2A	AC/DC switching adapter with USB port	$3.95	$3.49
2125991	CUI	12VDC @ 1.2A	AC/DC Linear unregulated adapter, UL/CUL	8.95	7.95
2082142	Ault	18VAC @ 0.9A	AC/AC wall transformer, UL approved	5.95	4.95
2129650	Elpac	24VDC @ 0.4A	AC/DC switching adapter w/ EMI filter	9.95	8.95

★ Switching Wall Adapters — Enter Web Code CDZ

Encapsulated DC-DC Converters

Here are some of the best-selling DC-DC converters that take up less space than a box of matches! Use them anytime you need to convert one DC voltage to another.

161702

- 2:1 wide input range
- Input Pi network filter
- 100VDC I/O isolation
- Short-circuitand overload protection

Part No.	Mfr. Part No.	Output	Input Range	Size (L" x W" x H")	Price
216937	SLW05B-05	5V @ 1A	18-36V	2.0 x 1.0 x 0.44	$12.95
213234	SLW05C-05	5V @ 1A	36-72V	2.0 x 1.0 x 0.44	12.95
161702	DCW03A-12	12V @ 125mA	9-18V	1.25 x 0.8 x 0.48	10.95
155695	SKE15A-24	24V @ 625mA	9-18V	2.0 x 2.0 x 0.43	18.95

RoHS compliant product. Jameco obtains RoHS compliance status information from its suppliers solely and does not verify or confirm such status.

AC-to-DC "Slim Line" Regulated Switching Wall Adapters

Slim Line Wall Adapters on page 3

Compact in size and lightweight, these adapters are the perfect power solution in all those applications where space is critical. You no longer have to deal with traditional wall adapters that block unused outlets in wall plates and power strips.

- Input voltage: 100-240VAC @ 47-63Hz
- Output connector: 2.1mm x 5.5mm female center positive
- Output cord length: 6 feet • UL/CUL certified

★Web Code: CBQ

Part No.	Mfr. Part No.	Output Voltage @ Current	Size (H" x W" x D")	Wt. (lbs.)	1	10	50	250
252736	S15AA05025001	5V @ 2.5A	2.9 x 1.3 x 2.2	0.3	$14.95	$13.49	$11.95	$10.49
2172931	EA1006BU	9V @ 0.66A	2.2 x 1.4 x 1.0	0.1	9.95	8.95	7.95	6.95
252824	S15AC12010001	12V @ 1A	2.9 x 1.4 x 2.2	0.2	12.95	11.49	9.95	8.95
252833	S15AC12012501L5190	12V @ 1.25A	2.9 x 1.3 x 2.2	0.3	13.95	12.95	11.95	10.95
1950497	GQ30-120200-BU	12V @ 2A	2.9 x 1.3 x 1.7	0.4	15.95	14.49	12.95	11.49
252866	MTR-09304	24V @ 0.5A	2.9 x 1.3 x 2.2	0.3	12.95	11.95	10.95	9.95

1950497

JAMECO ReliaPro

HLG-320H Series LED Power Supplies

LED Power Supplies on page 21

These full range LED supplies have built-in active PFC (Power Factor Correction) function to keep your power factor greater than 0.9 for loads 60% or higher. This translates to high efficiencies up to 95%!

- Universal AC input / Full range (90-305VAC @ 47-63Hz, or 127-431VDC)
- Short-circuit, overload, over-voltage, over-temperature protection • Output current adjustable
- Cooling by free air convection • Meets 4kV surge immunity level (IEC61000-4-5)
- Size: 9.9"L x 3.5"W x 1.7"H • Weight: 4.0 lbs. • 5-year warranty

Part No.	Mfr. Part No.	Output Voltage @ Current	Enclosure Rating	Efficiency (%)	1	5
2141780	HLG-320H-12A	+12V @ 22A	IP65	91.0	$129.95	$119.95
2141907	HLG-320H-24B*	+24V @ 13.34A	IP67	94.0	129.95	119.95
2141835	HLG-320H-36A	+36V @ 8.9A	IP65	94.5	129.95	119.95
2141763	HLG-320H-48	+48V @ 6.7A	IP67	95.0	129.95	119.95
2141851	HLG-320H-48A	+48V @ 6.7A	IP65	95.0	129.95	119.95

*Built-in 3-in-1 dimming function

★Web Code: LPP

GS60 Series 3-Wire Table-Top Power Supplies

Table-Top Power Supplies on pages 6-9

These highly efficient table-top power supplies have a 2.1mm x 5.5mm standard DC plug to fit most of your industrial applications. Be sure to also pick up a 3-wire AC cord as it is not included, we recommend P/N 38050 on page 14.

- Universal input: 90-264VAC @ 47-63Hz, or 135-370VDC • 3 pole AC inlet IEC320-C14 • No load power consumption < 0.3W
- Short-circuit, overload, over-voltage, over-temperature protection • Fully enclosed plastic case • Class I power (with earth pin)
- Energy Star Level V compliant • Meet EISA 2007(Energy Independence and Security Act)
- Approvals: UL/CUL/TUV/BSMI/CCC/CB/FCC/CE
- Size: 4.9"L x 2.0"W x 1.2"H • Weight: 0.67 lbs.

Part No.	Mfr. Part No.	Output Volt (VDC)/Current (A)	Power (W)	Efficiency (%)	1	5
2103118	GS60A07-P1J	+7.5/6.0	45	85.5	$20.49	$18.49
1952361	GS60A09-P1J	+9.0/6.0	54	87.5	20.49	18.49
1952370	GS60A12-P1JU	+12.0/5.0	60	88.0	20.49	18.49
1954295	GS60A15-P1J	+15.0/4.0	60	88.5	20.49	18.49
2154951	GS60A18-P1JU*	+18.0/3.3	60	88.5	20.49	18.49
1952214	GS60A24-PIJU	+24.0/2.5	60	90.0	20.49	18.49
1952396	GS60A48-P1JU*	+48.0/1.25	60	92.0	24.95	22.49

*AC cord included

★Web Code: DDZ

RSP-1500 Series Enclosed Power Supplies

Enclosed Power Supplies on pages 16-20

The PFC series of enclosed power supplies provides some of the highest power densities you can find in a compact supply at 8.3W per cubic inch! The compact package gives you lots of efficient power and many additional features.

- Universal AC input: 90-264VAC @ 47-63Hz, or 127-370VDC • Zero voltage switching
- Built-in active PFC function, PF>0.95 • Parallel operation
- Short-circuit, overload, over-voltage, and over-temperature protection • Current sharing up to 6000W (3+1)
- Forced air cooling by built-in DC ball bearing fan • Built-in 12V/0.1A auxiliary power for remote control
- Built-in remote sense and on/off control • High power density: 8.3W/inch³
- Size: 10.9"L x 5.0"W x 3.3"H • Weight: 6.6 lbs. • 3-year warranty

Part No.	Mfr. Part No.	Voltage @ Current (min-max)	Power (W)	Ripple & Noise (mVp-p)	1	5
694920	RSP-1500-15	+15V @ 0-100A	1500	150	$339.95	$324.95
694938	RSP-1500-24	+24V @ 0-63A	1512	150	339.95	324.95
694946	RSP-1500-27	+27V @ 0-56A	1512	150	339.95	324.95
694954	RSP-1500-48	+48V @ 0-32A	1536	200	339.95	324.95

★Web Code: EPS

★For additional products, availability, and additional specifications visit Jameco.com and enter the web code in the product search box

JAMECO® ELECTRONICS
1355 Shoreway Rd., Belmont, CA 94002-4100

Toll-Free Ordering and Customer Support:
Domestic: 1-800-831-4242 / International: 1-650-592-8097
Domestic Fax: 1-800-237-6948 / International Fax: 1-650-592-2503
Website: http://www.Jameco.com / Email: Info@Jameco.com

PRESORTED STANDARD
U.S. POSTAGE PAID
JAMECO ELECTRONICS

Customer Number

Like our catalog, we have even more products on our website

Scan on your smartphone with a code reader app.

If you would like to unsubscribe from Jameco's catalog please visit www.Jameco.com/CatalogUnsubscribe

Printed in USA

Thousands of Power Products To Choose From

RS-150 Series Enclosed Single-Output Power Supplies

The RS-150 G3 series of Mean Well power supplies replaces the popular S-150 G2 series (pages 16-19) and still provides all the great features in a compact size at a great price. These are sure to handle high operating temperatures and will stay in great condition long after your purchase.

- High efficiency, long life, and high reliability
- 100% full load burn-in test
- Short circuit, overload, and overvoltage protection
- Utilizes all 221°F (105°C) long life electrolytic capacitors
- High operating temperatures of up to 158°F (70°C)
- Size: 7.8"L x 3.9"W x 1.5"H
- Weight: 1.5 lbs.
- Certifications: UL/CUL/CE/CB
- 3-year warranty

*Web Code: EPS

Enclosed Power Supplies on pages 16-20

Part No.	Mfr. Part No.	Volt. @ Curr. (min-max)	Power (W)	Ripple & Noise (mVp-p)	Efficiency (%)	1	5
693329	RS-150-3.3R	3.3V @ 0-30A	99	80	74	$31.95	$28.95
323821	RS-150-5R	5V @ 0-26A	130	80	78	31.95	28.95
323839	RS-150-12R	12V @ 0-12.5A	150	120	83	31.95	28.95
323847	RS-150-15R	15V @ 0-10A	150	120	84	31.95	28.95
323855	RS-150-24R	24V @ 0-6.5A	156	120	86	31.95	28.95
323863	RS-150-48R	48V @ 0-3.3A	158.4	200	87	31.95	28.95

DR-120 Series 120W DIN-Rail Power Supplies

Use these DIN Rail supplies and be able to power up anywhere in the world with the universal switch-selectable AC input from 90-132VAC to 180-264VAC @ 47-63Hz.

- Short-circuit, overload, over-voltage, over-temperature protection
- UL 508 (industrial control equipment) approved
- 100% full load burn-in test
- Fixed switching frequency at 55kHz
- 3-year warranty
- Size: 2.6"W x 4.9"H x 3.9"D
- Weight: 1.7 lbs.

DIN-Rail Power Supplies on page 22

*Web Code: RBY

Part No.	Mfr. Part No.	Output Volt. @ Curr.	Volt. Adjustment Range	Ripple & Noise (mVp-p)	Efficiency (%)	1	5
212274	DR-120-12	12V @ 10.0A	12-14V	80	80	$46.95	$41.95
212266	DR-120-24	24V @ 5.0A	24-28V	80	84	46.95	41.95
221904	DR-120-48	48V @ 2.5A	48-53V	100	85	46.95	41.95

Single-Output Table-Top Power Supplies

Table-Top Power Supplies on pages 7-9

- Input voltage: 100-240VAC @ 50-60Hz
- LED indicator (except P/N 2158021)
- Color: Black
- AC cord not included (recommend P/N 38050, pg 14, P/N 2158021 recommend P/N 189587, pg 14)

GlobTek®

*Web Code: DDZ

Part No.	Manufacturer	Output Voltage/Current	Output Power (W)	Output Connector ID x OD*	DC Cord Length	Size (L" x W" x H")	Wt. (lbs.)	Pricing 1	5	25
320081	Globtek	+5VDC/6A	30	2.5mm x 5.5mm	6'	4.7 x 2.4 x 1.3	0.7	$39.95	$35.95	$31.95
1940264	ReliaPro	+12VDC/3.5A	42	2.1mm x 5.5mm	4'	4.7 x 2.4 x 1.4	0.6	17.95	16.49	14.49
2172771	ReliaPro	+12VDC/5A	60	2.1mm x 5.5mm	4'	4.7 x 2.4 x 1.4	0.7	19.95	17.95	15.49
2172789	ReliaPro	+24VDC/1.25A	30	2.1mm x 5.5mm	6'	3.9 x 1.8 x 1.2	0.4	15.49	14.95	14.49
2158021	Phihong	+24VDC/2.5A	60	2.1mm x 5.5mm	4'	5.1 x 2.4 x 1.3	0.5	39.95	36.95	33.95
1950913	ReliaPro	+24VDC/2.5A	60	2.5mm x 5.5mm	6'	4.8 x 2.4 x 1.4	1.8	19.95	18.95	17.49
2172797	ReliaPro	+24VDC/3.75A	90	2.5mm x 5.5mm	4'	5.4 x 2.3 x 1.4	0.9	32.95	29.95	26.49

*Female, center positive polarity

2172771

Contact Information

Order Desk
Phone: 1-800-831-4242
Fax: 1-800-237-6948
E-mail: Sales@Jameco.com

Technical Support
Phone: 1-800-831-4242
E-mail: Tech@Jameco.com

Customer Service
Phone: 1-800-536-4316
E-mail: CustService@Jameco.com

Credit Department
Phone: 650-592-8097
Fax: 650-802-1583
E-mail: Credit@Jameco.com

International Order Desk
Phone: 650-592-8097
Fax: 650-592-2503
E-mail: International@Jameco.com

Feedback
E-mail: Feedback@Jameco.com

The Jameco RobotStore
Website: www.RobotStore.com

Club Jameco
Website: www.ClubJameco.com